



About Us

Products

Services

Support


Projects

Web Shop

Products

- » Board Comparison Chart
- » Developer's Kits
- » OEM Boards
- » QuickStart Boards
- ↓ Education Boards
 - » LPC2103 Edu board
 - » LPC2138 Edu board
 - » LPC2148 (v3) Edu board
 - » Experiment board
 - » LPC2148 (v2) Edu board
 - » Expansion - Ethernet
 - » Expansion - Prototype
 - » Expansion - MP3
 - » Expansion - UART
- » LPCXpresso & mbed
- » Displays
- » Tools
- » Accessories

LPC2103 Education Board

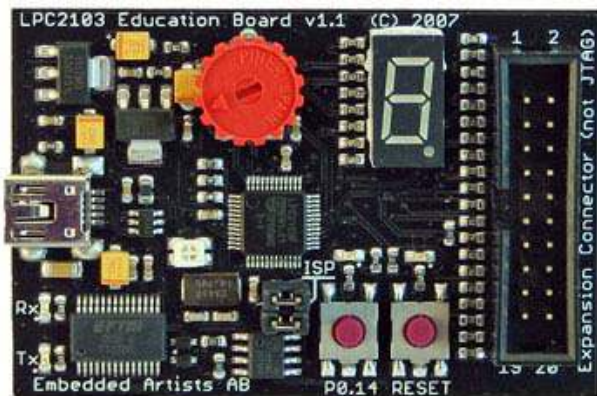

Start learning more about ARM7 processors in general and the LPC2103 microcontroller in particular using Embedded Artists' LPC2103 Education Board.

Price Information

Volume discount available for 10 boards, or more, see web shop

Art.no: EA-EDU-009 [Buy](#)

Experiment Board

An Experiment expansion board is available, see Related Products tab.

Overview	Specification	MCU	Related Products	Resources	FAQ
----------	---------------	-----	------------------	-----------	-----

LPC2103 Education Board	
<i>Processor</i>	NXP's ARM7TDMI LPC2103 microcontroller
<i>Program Flash</i>	32 KB
<i>Data Memory</i>	8 KB
<i>Clock Crystal</i>	14.7456 MHz crystal
<i>On-board Peripherals</i>	<ul style="list-style-type: none"> USB-to-serial bridge interface on UART # 0 Analog input (via trimmer potentiometer) 7-segment LED display RGB-LED, each color can be controlled via PWM signal 2 LEDs (on P0.14 and Reset signal) Pushbutton on P0.14 Reset button 2 Kbit I2C-E2PROM 20 pos expansion connector
<i>Dimensions</i>	Only 68 x 42 mm
<i>Power</i>	On-board low-dropout voltage and reset generation <ul style="list-style-type: none"> Generates +3.3V and +1.95V +3.3V available for external circuits, up to 300 mA Powered via USB connector.
<i>Connectors</i>	<ul style="list-style-type: none"> mini-B USB, USB-to-serial bridge interface 20-pos expansion connector
<i>Other</i>	<ul style="list-style-type: none"> Simple and automatic program download (ISP) via USB-serial channel. Circuit that automatically controls the bootloader from USB-serial channel Four layer PCB (FR-4 material) for best noise immunity Delivered with 20 pos flat cable for explanation connector