

**Description: 1/2 WAVE END FED** 

PART NUMBER: SPEN14918

**Series: Portables** 



### Features:

- 890 960 MHz
- Omnidirectional antenna
- Gain 0.7dBi
- Polarization Vertical
- Connector M7 X 1.00
- Length 151.2 mm
- IP67

# **Applications:**

- 890-960 Portable radios
- Handheld radios
- Public safety
- First responders
- RoHS Compliant

Issue:1905

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 15255 Innovation Drive #100 San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34<sup>th</sup> St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4<sup>th</sup> Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



**Description: 1/2 WAVE END FED** 

**PART NUMBER: SPEN14918** 

**Series: Portables** 

## **ELECTRICAL SPECIFICATIONS**

Antenna Type Half wave, End fed

Frequency 890-960 MHz

Nominal Impedance 50  $\Omega$ 

VSWR 3:1

Radiation Pattern Omni

HPBW Vertical Plane, Avg. 90°

Peak Gain 0.7 dBi

Efficiency 65 %

Polarization Vertical

Power Withstanding 3.5 W

# **MECHANICAL SPECIFICATIONS**

Overall Length 151.2 mm

Weight 11.4 g

Antenna Color / Material Black / TPU (TEXIN 245)

Connector type M7 X 1.00 – Flush base (MD Type)

### **ENVIRONMENTAL SPECIFICATIONS**

Operating Temperature -40 to +85° C

Ingress Protection IP67
RoHS Compliant Yes








**Series: Portables** 

**Description: 1/2 WAVE END FED** 

**PART NUMBER: SPEN14918** 

## **MECHANICAL DRAWING**

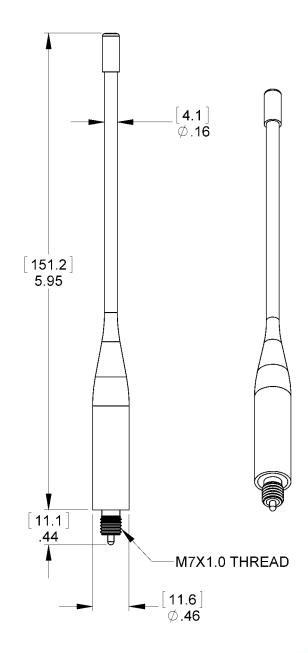

All dimensions are in mm / inches





**Description: 1/2 WAVE END FED** 


**PART NUMBER: SPEN14918** 

## **Series: Portables**


## **CHARTS**

Note: antenna is mounted on the top center of a metal buddy box Dimensions (LxWxH) in mm [inches]: 132.6 [5.22] x 60.5 [2.38] x 31.0 [1.22].


### VSWR vs Frequency SPEN14918 Measured at Pulse, USA - Aug. 9, 20

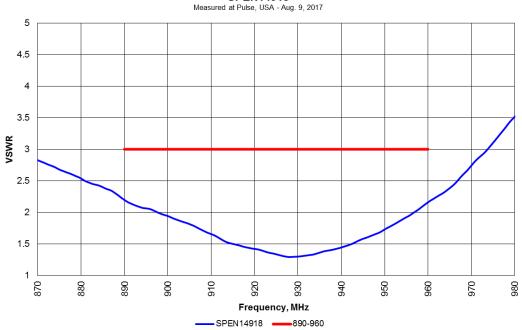

# Test Setup





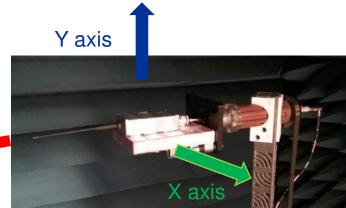




**Description: 1/2 WAVE END FED** 

**PART NUMBER: SPEN14918** 

# **Series: Portables**


## **CHARTS**

### Peak Gain vs Frequency SPEN14918

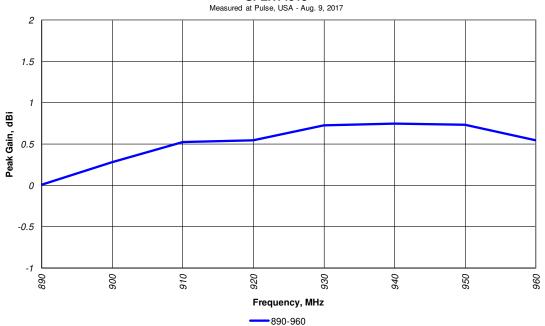

#### Efficiency vs Frequency SPEN14918

Measured at Pulse, USA - Aug. 9, 2017

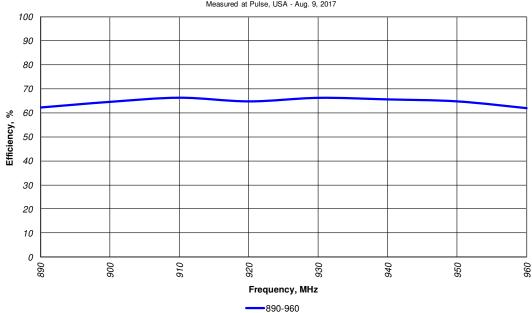

Issue:1905







**Series: Portables** 

# **Description: 1/2 WAVE END FED**

**PART NUMBER: SPEN14918** 

## **CHARTS**

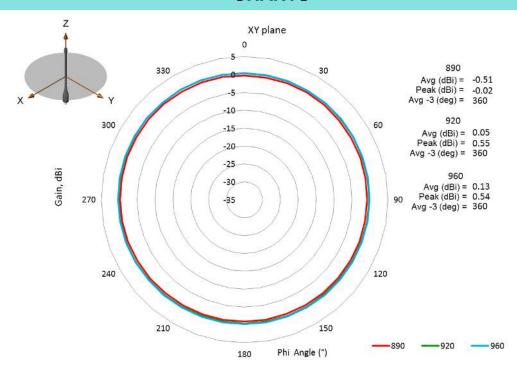

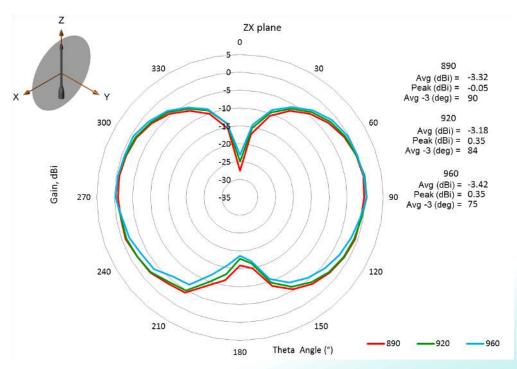







**Description: 1/2 WAVE END FED** 

**PART NUMBER: SPEN14918** 

**Series: Portables** 

## **PACKAGING**

25 antennas in plastic bag: 15 "cap up," 10 "cap down."

1 label on plastic bag with part number, date code.