







04/04/07

REV.	ECN.NO.	MODIFY CONTENT	DATE
A		全新發行	03/20/07
B		增加插卡指示燈	04/04/07
C	ES1007A.095	取消 LOGO 標示	04/14/07

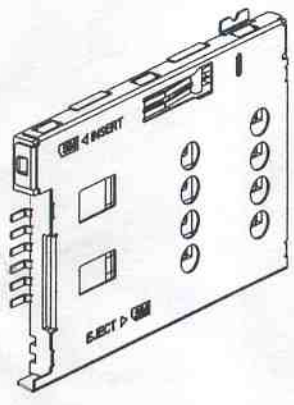

NOTES:

1. SPECIFICATIONS
 INSULATION RESISTANCE: 500M min. AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100MΩmax. AT 10mA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP. RANGE: -55 °C+85 °C
 MATING CYCLES: 5000 INSERTIONS
2. MATERIAL:
 INSULATOR: H-TEMPERATURE PLASTIC, UL 94V-0,
 COLOR: BLACK
 TERMINAL: COPPER ALLOY, T=0.15mm
 SWITCH: COPPER ALLOY, T=0.10mm
 SHELL: STAINLESS STEEL, T=0.15mm
3. FINISH:
 TERMINAL: 50μ" min NICKEL UNDERPLATED ON ALLOY, GOLD PLATING
 ON CONTACT AREA, 80μ" min TIN ON SOLDER TAIL.
 SHELL: 50μ" NICKEL UNDERPLATED ON ALLOY, GOLD FLASH ON SOLDER
 LATCH

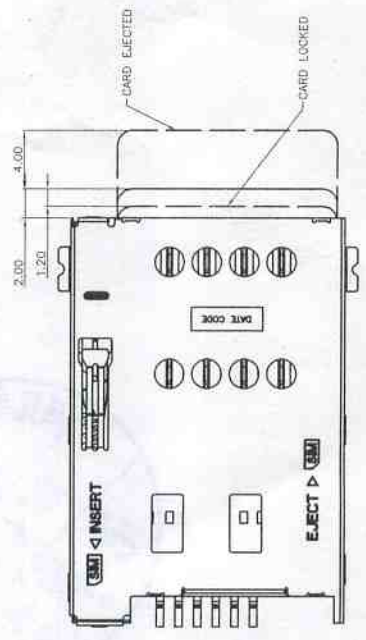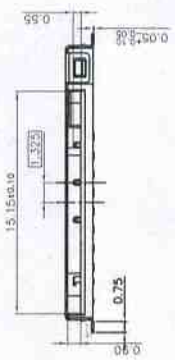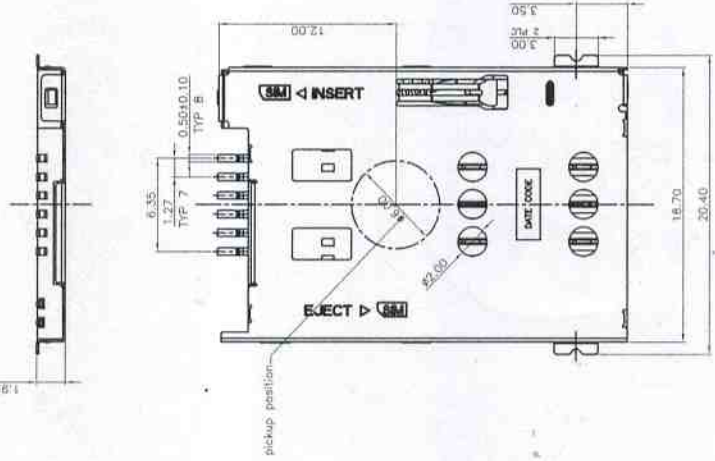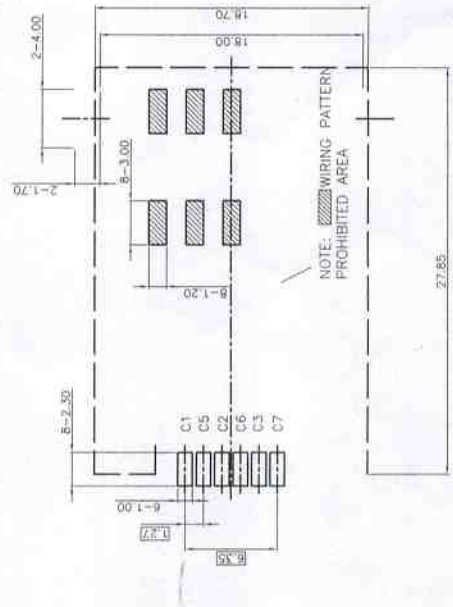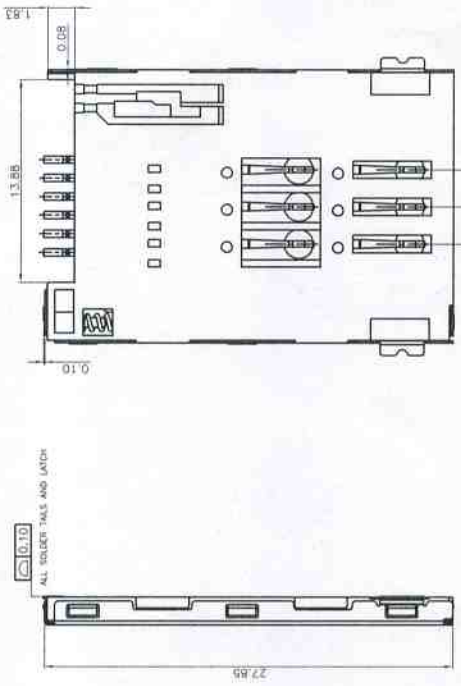

RECOMMENDED PCB LAYOUT

GENERAL TOLERANCE	FILE NO.	101-00269	PART NO.	101-00269-xx	DRAWN	COCO	MATERIAL	N/A
X.±0.50	REV.	C	TITLE	SIM CARD READER EPIN (PUSH/PUSH)/O SWITCH	CHECKED	楊秀明	DATE	04/14/2007
.X±0.38	SIZE	A4	SHEET	1/1	APPROVED	陳俊欽	UNIT	MM
.XX±0.25								

SM Shouh Min Industry (ShenZhen) CO., LTD