

LXC85 series

LED Power Supply

Constant Current LED Power Supplies

LED Power
85W

LED POWER

next generation power
source

FEATURES

- High Efficiency (up to 91%)
- UL1310 Class 2
- Active PFC (Typical 0.99)
- IP67 Waterproof
- OVP, SCP, OTP
- -35 to 60°C deg operation
- Universal Input 90-305VAC
- UL8750 compliant
- EN61347-1, -2-13 compliant

The LXC85 series of Class 2 constant current LED power supplies from Excelsys Technologies can deliver up to 85W of output power in an extremely compact package size.

The LXC85 series of constant current power supplies provides up to 2800mA of output current and 243V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXC85 series provides high reliability and high performance in a compact package.

Model Number	Output Voltage	Output Current	Input Voltage	OVP Latching max	Efficiency
LXC85-0350SW	122-243V	350mA	90-305VAC	340V	91.0%
LXC85-0450SW	95-189V	450mA	90-305VAC	264V	91.0%
LXC85-0700SW	61-121V	700mA	90-305VAC	170V	90.0%
LXC85-1050SW	41-81V	1050mA	90-305VAC	113V	90.0%
LXC85-1400SW	31-61V	1400mA	90-305VAC	85V	90.0%
LXC85-1750SW(C)	25-49V	1750mA	90-305VAC	68V	90.0%
LXC85-2000SW(C)	22-43V	2000mA	90-305VAC	60V	90.0%
LXC85-2450SW(C)	18-35V	2450mA	90-305VAC	49V	89.0%
LXC85-2800SW(C)	16-30V	2800mA	90-305VAC	43V	89.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		305	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC in, 85W output			1.1A	
Leakage Current	277VAC in, 50Hz			1.0	mA
Inrush Current	230VAC in, 25°C, Cold Start			50	A
Power Factor	220VAC, 110VAC	0.95		0.99	
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±2	%
Load Regulation				±3	%
Voltage Range	See table of outputs				
Output Current Accuracy	% of Iout			±5	%
Ripple and Noise	20MHz Bandwidth.			3.0	% pk-pk
Overshoot				10	%
Turn-on Delay	Measured at 220VAC and full load		0.6	1	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Latching. See individual models OVP levels				
Over Temp Protection	Latching Internal component temperature		120		°C
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note A Input to Chassis	3750 1500			VAC VAC
Efficiency	See individual models		90.5		%
Safety Agency Approvals	UL8750, EN61347-1, -2-13				
No load Power Dissipation	Measured at 230 VAC		1.0		W
MTBF	MIL-HDBK-217F, 110VAC input, 80% Load, 25°C		300,000		Hours
Lifetime	45°C, 110VAC Input, 80% Load		63,000		Hours
Weight			770		g
Operating Temperature		-35		+60	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

Note A. Primary to Secondary Isolation test not to be carried on power supply.

Note B. Load Voltage must be maintained above minimum voltage. See models for voltage range.

Note C. Class 2 (USR and CNR) except for LXC85-1750SW and LXC85-2000SW which are Class 2 US only.



Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
27 Eastgate Drive f: +353 21 4354864
Eastgate Business Park e: sales@excelsys.com
Little Island, Cork, Ireland
IRELAND

North America

Excelsys Technologies t: (972) 771 4544
519 Interstate 30, #309 f: (972) 421 1805
Rockwall, TX 75087 e: salesusa@excelsys.com
USA

EMC				
Parameter	Standard		Level	Units
Emissions				
Conducted	EN55015		Compliant	
Radiated	EN55015		Compliant	
Harmonic Distortion	EN61000-3-2		Compliant	
Flicker and Fluctuation	EN61000-3-3		Compliant	
Immunity				
ESD	EN61000-4-2		Level 4	
Radiated RFI	EN61000-4-3		Level 3	
Fast Transients - burst	EN61000-4-4		Level 4	
Surge Immunity	EN61000-4-5		Level 4	
Conducted RFI	EN61000-4-6		Compliant	
Power Freq Magnetic Field	EN61000-4-8		Compliant	
Voltage Dips	EN61000-4-11			

INPUT / OUTPUT WIRING


INPUT CABLE

SJTW 18AWG 3C
Black (L),White(N), Green (G)650±20mm

OUTPUT CABLE

SJTW 18AWG 2C
Black (-V) and Red (+V) 220±20mm

MECHANICAL SPECIFICATIONS

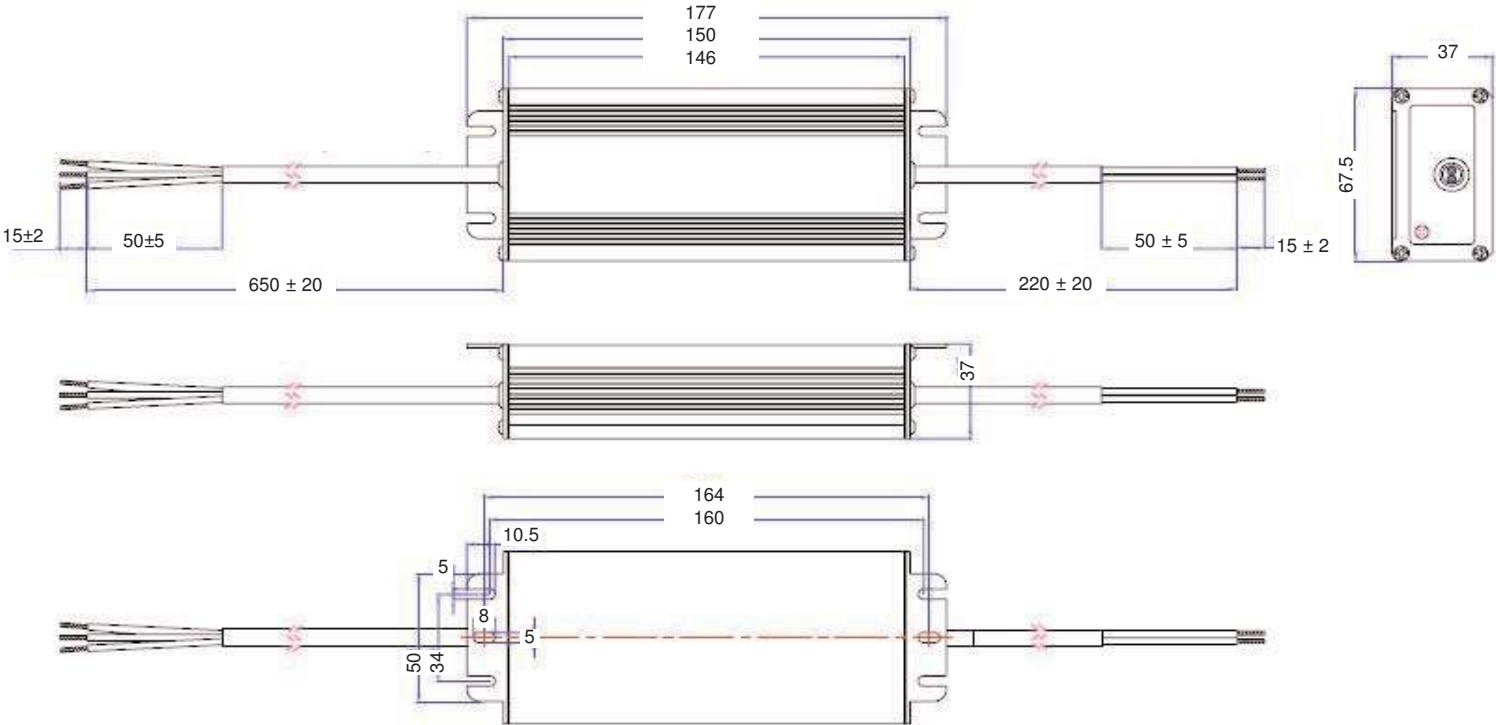

Specifications are subject to change without notice
LXC85 Datasheet Pre Release 18 March 2011



Europe/Asia		North America	
Excelsys Technologies Ltd	t: +353 21 4354716	Excelsys Technologies	t: (972) 771 4544
27 Eastgate Drive	f: +353 21 4354864	519 Interstate 30, #309	f: (972) 421 1805
Eastgate Business Park	e: sales@excelsys.com	Rockwall, TX 75087	e: salesusa@excelsys.com
Little Island, Cork, Ireland		USA	
IRELAND			