MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

ASSEMBLY - SWITCH

CATALOG LISTING
9AC25-3

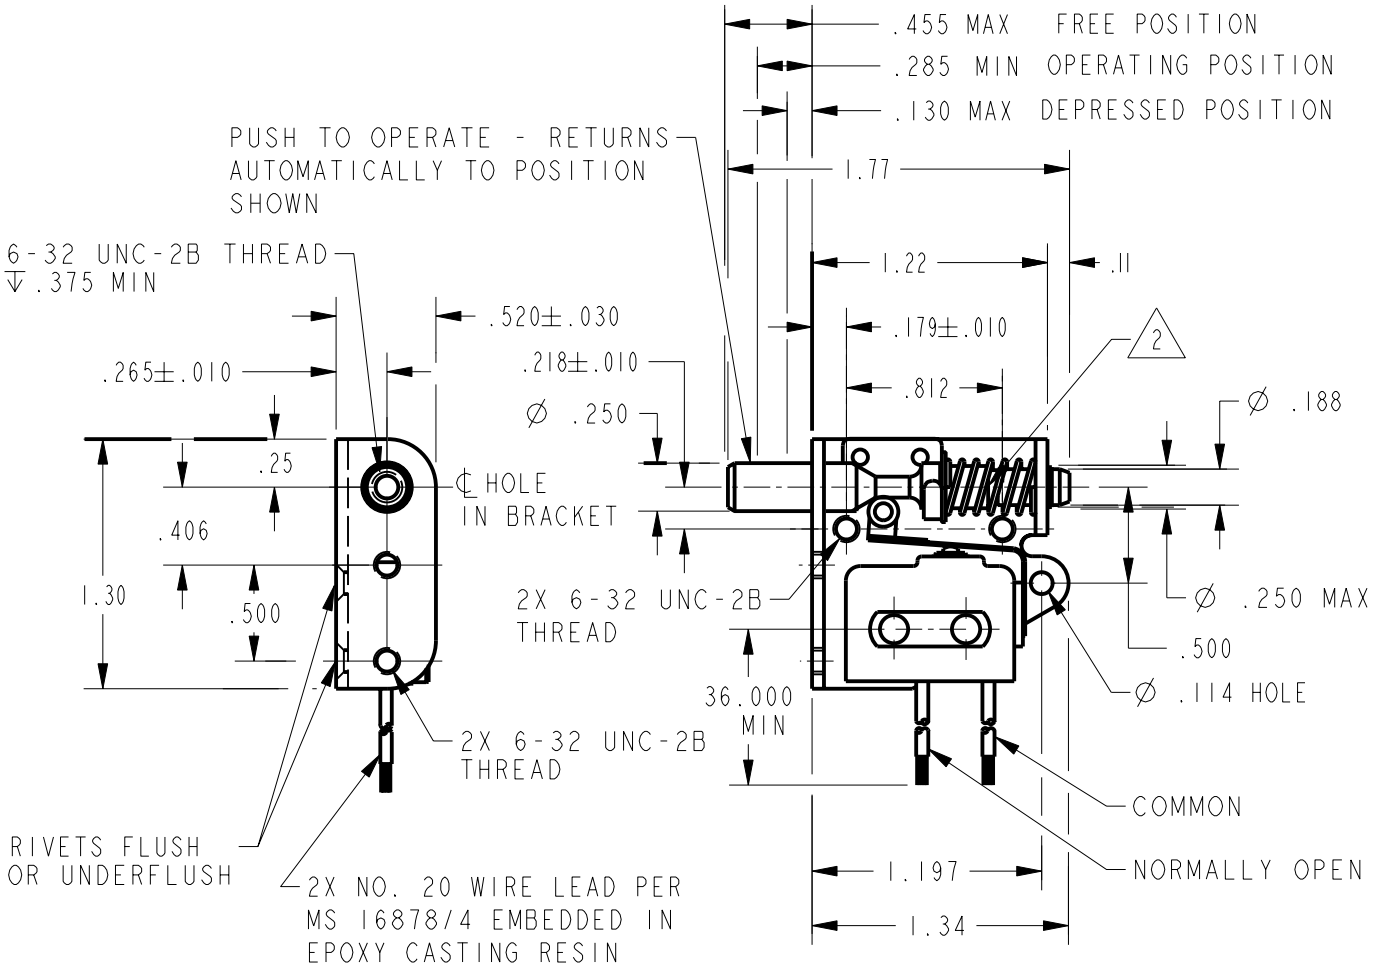

NOTES
1 - UNIT INCLUDES CATALOG LISTING "5SE3-3" BASIC SWITCH
2 POSITIVE OVERTRAVEL STOP IS PROVIDED ON ROD UNDER SPRING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL	DO NOT SCALE PRINT
TOTAL TRAVEL .250 APPROX PUSH DIRECTION	CONTACT ARRANGEMENT S P N O 250 VAC----------5 AMP 30 VOLTS DC RATING INDUCTIVE — — — SEA LEVEL — 3 AMP 50,000 FT — 2.5 AMP RESISTIVE — — — SEA LEVEL — 5 AMP 50,000 FT — 5 AMP MAXIMUM INRUSH — — — — — 24 AMP	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±	WEIGHT

9AC25-3
CATALOG LISTING
PAGE 1 OF 1
ISSUE 2
RELEASE NO. PR-21307
REPLACES

REVISIONS
A 201530 KED 16OCY00

DRAWN	KED	16 OCT 00
CHECK		
CHECK	SAV	16 OCT 00
CHECK		
CHECK		

PTC/CAD 2D