


SURFACE MOUNT CONTACTS

Surface Mount Type



FCC ID: 2AUTX-TWC

IC: 25828-TWC

RoHS

Contact Size: 2.26"L×1"W×.22"H

(57.3mm×25.2mm×5.7mm)

Standard Magnet Size: 1.31"L×.45"W×.32"H

(33.3mm×11.3mm×8mm)

Standard Gap: 1"(25mm) Colors: White, Brown

Unit weight: 10g

Wireless Signal Range: 375 ft, open air, with

Wirless Control Panel


Specifications

Part Number	Gap Inch(mm)	Reed Form	Frequency (Hz)	Transmission
TWC 345R	1"(25)	Normally Open	345	ASK
TWC 319.5R	1"(25)	Normally Open	319.5	ASK

OPERATING TEMPERATURE:-10°C to +50°C(14°F to 122°F) RELATIVE HUMIDITY:5% to 93%

Outline Dimensions

Unit: inch(mm)

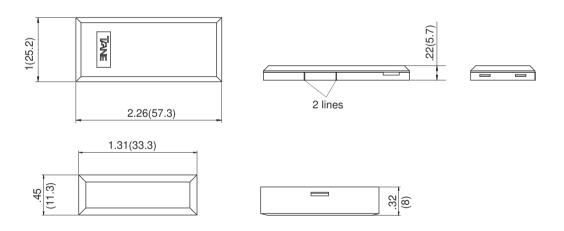

Mount Transmitter and Magnet

- 1. Mount the TWC on any widow or door frame using the supplied double-sided tape.
- 2. Find the 2 lines on the outside of the TWC 345R &TWC 319.5R cover. Align the center of the magnet with the line for TWC 345/319.5R. Make sure the distance is not greater than 5/8 of an inch.



The Best Industry Guarantee Since 1984®

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040 Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125 www.tanealarm.com • E-MAIL: info@tanealarm.com