

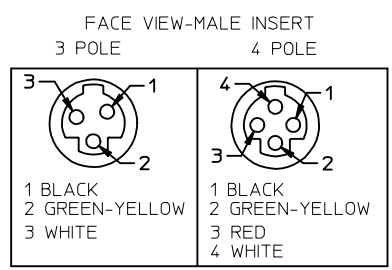
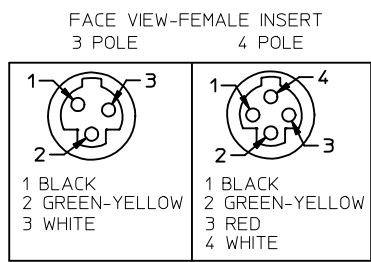


POLES	MATERIAL NO.	ENG. NO.	AMPS	LENGTH
3	1300640401	CC3130A48M020	32	2M +89-0MM (6'7"+3.50-0)
4	1300640356	CC4130A48M020	32	2M +89-0MM (6'7"+3.50-0)

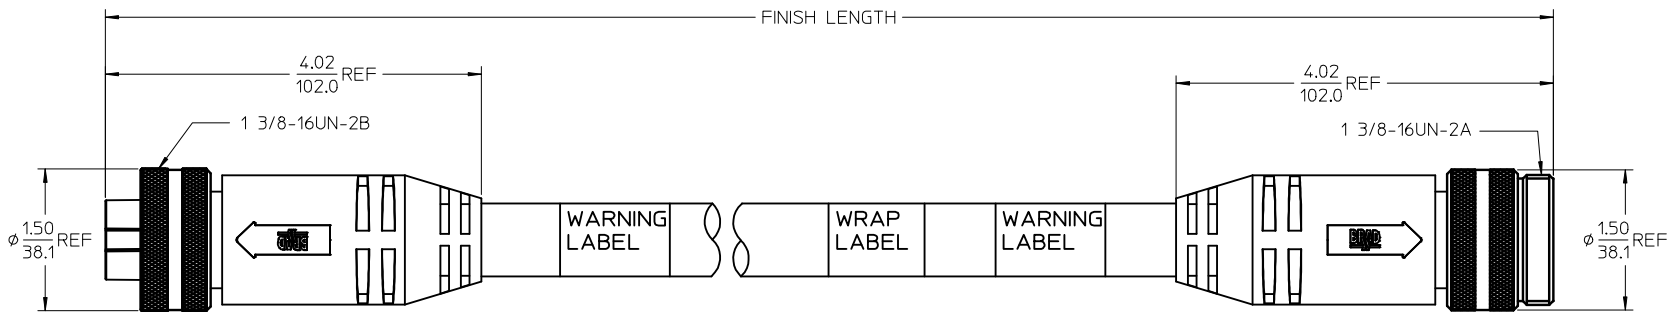

SPECS:
OVERMOLD: GRAY PVC
INSERT: BLACK PVC
COUPLING NUT: ANODIZED ALUMINUM
CABLE: #10AWG GRAY PVC
DUAL RATED UL TC/OPEN WIRING & STOOO
ELECTRICAL: 600V AC/DC

UPDATED PROFILE EC NO: IPG2014-1160 DRWNGGUSTAFSON 2013/12/26 CHKD:VOU 2014/01/15 APPR:WOODMAN 2014/05/12 REV DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± .005 2 PLACES ± --- ± .010 1 PLACE ± --- ± .020 ANGULAR ± 1/2°	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0 ▽=0		IN/MM	1:1	INCH	
MATERIAL NO. SEE CHART	DRAWN BY B.RUPERT DATE 01/12/10 CHECKED BY B.WOODMAN DATE 01/12/10 APPROVED BY JFMURPHY DATE 2010/01/15	TITLE QUICK CHANGE FEM/MALE STRAIGHT, ALT KEY 3 & 4 POLE AS PORTABLES	MATERIAL NO. SEE CHART	DOCUMENT NO. SD-130064-401	SHEET NO. 1 OF 1	
	SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				