

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ORBEL CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ORBEL CORPORATION IS PROHIBITED.

DIMENSIONS ARE IN INCHES [MILLIMETERS]
TOLERANCES:
FRACTIONAL±
ANGULAR: MACH± 3 Degrees
TWO PLACE DECIMAL ± .015 [.381]
THREE PLACE DECIMAL ± .010 [.254]

MATERIAL:
.002" [.051] BeCu ALLOY 25, 1/2 HARD
Q.A.

FINISH:

COMMENTS:

WEIGHT: 0.117oz. [3.307g]

	NAME	DATE	
DRAWN	TNC	11/5/2014	
CHECKED			
ENG APPR.			
MFG APPR.			
Q.A.			


CRBEL ENGINEERED SOLUTIONS

					ı
	DWG NO. 24M09-BFA016000T				
SCALE: 2:1		CAGE CODE: 57DU2	SHEET	1 OF 1	l

## **HOW TO ORDER FINGER-STOCK GASKETS**

The chart below is an easy-to-use reference on how Orbel finger-stock gasket part numbers are created and used to order standard and custom gaskets. Custom configurations that fall outside of our standard gasket styles are also available.

## Sample Part Number: 30B09-BFA024000T

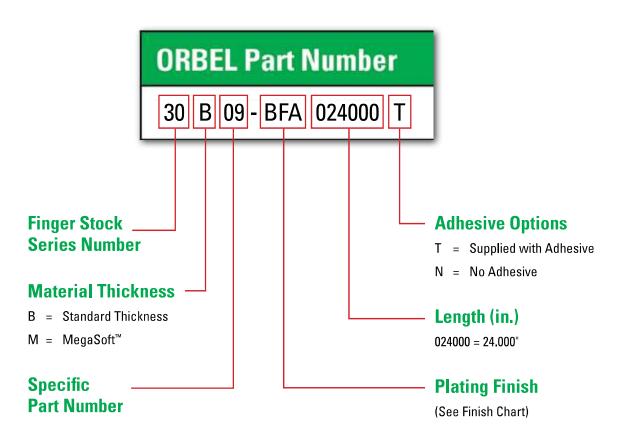

PLATING FINISHES						
Finish Type	Finish Code	Finish Type	Finish Code			
SILVER	AGA	NICKEL, ELECTROLESS	NIP			
GOLD .000050" MIN	AUA	TIN/LEAD 90/10, MATTE	РВА			
GOLD .000050" MIN with NICKEL FLASH UNDERPLATE	AUK	TIN/LEAD 60/40, MATTE	РВВ			
BRIGHT FINISH, UNPLATED	BFA	TIN/LEAD 90/10, BRIGHT	PBC			
BRIGHT FINISH, SOLDERABLE	BFS	TIN/LEAD 60/40, BRIGHT	PBD			
CADMIUM + CLEAR CHROMATE	CDA	TIN, BRIGHT	SNA			
CADMIUM + YELLOW CHROMATE	CDB	TIN, MATTE	SNB			
NICKEL, BRIGHT	NIA	ZINC + CLEAR CHROMATE	ZNA			
NICKEL, MATTE OR SULFAMATE NICKEL	NIB	ZINC + YELLOW CHROMATE	ZNB			

All plating thicknesses are .0001" min. except where noted.