

Ŧ	G	нт — — — — — — — — — — — — — — — — — — —	m	0



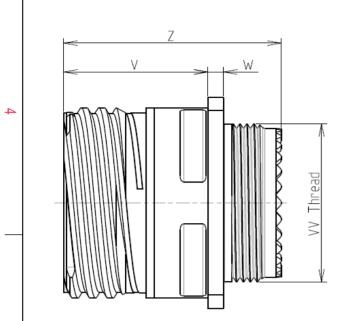

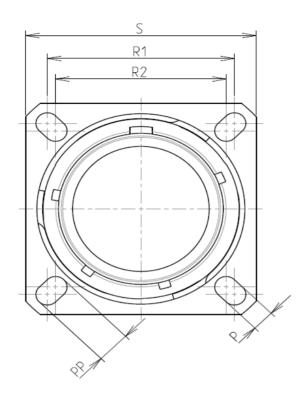

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Mass

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ω

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Stainless Steel			
	-Shell Plating	: Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
2	-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
	-Durability	: 500 Mating cycles			
	-Delivered with Souriau contacts and Accessories				
	-Temperature Range	 -65°C to +200°C 			
	-Salt Spray	: 500 hours			
	. ,				

: 30.86 g ± 10%

8D 0

G

11

-

S

22

S


F

Ν

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
PP	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

SOURIAU shall not be liab	le for a
due to a use of the Pro	ducts v
the Specifications issued by	either
(professional recor	nmend
	Cour

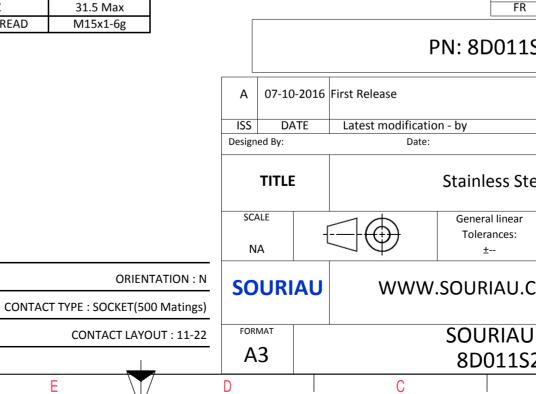

	ω		A		
					4
S EXA	AMPLE				3
s which er of t indation untry R	non-conformit ch does not co che Parties or t on, technical no Jurisd	mply with by a third part			2
					-
		CUSTOMER	RDRAWING	MOD N°	<u> </u>
Steel Receptacle 8D series					
ar			PROJECT 59		1
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	DRG N° 2SN-C			SHEET 1/2	
	B		A		J

		Contact Layout						Panel Cuto
		22*				SQUARE	E FLANGE RECEPTACLE (TYPE REAR MOUNTING	0)
4	(co o ^s					R1	
	Ctc A	4#22D 11-22 X Y 1.905 1.905						 øt
	B C	1.905 -1.905 -1.905 -1.905						Dim
ယ	D	-1.905 1.905]				Ģ	ØA ØAA R1
								ØT
	-						SOURIAU shall not t due to a use of tl the Specifications issu (professional	he Products w led by either
N							PN	Coun FR : 8D011
					A	07-10-2016 Fir		
						ned By:	Date:	
						TITLE		ainless St
_						ALE IA		General linear Tolerances: ±
					SC	URIAU	WWW.SC	DURIAU.
				_		мат 3		OURIAU 8D011S
	Н	G	F	E	D	· ·	С	

Т

ш

т

G

0

