



global solutions :  
local support™

## InWave Series Indoor Directional Antenna 2400 to 2483 MHz Operation

The 2.4GHz InWave series indoor antennas are specifically designed for the demands of the indoor wireless LAN environment. They offer high gain in a thin, low profile package. There are two models available with different horizontal beamwidths depending on the coverage needs of the wireless LAN. The antennas are constructed of a white UL rated ABS radome with an aluminum backplate. The fixed bracket makes for easy installation on any wall surface. The antenna comes with an 8" pigtail cable terminated with an N female connector standard. The antennas can also be used outdoors if mounted under an eave to protect against extreme weather. The radome is UV resistant ABS and the elements are metal, rather than the traditional PCB material, so performance will be unaffected by moisture.

### Features and Benefits:

- Small size / low profile
- Wall mount (bracket included)
- Vertical polarization
- 8" pigtail with N female connector

### Applications

- 2.4 GHz wireless LAN applications
- Indoor access points and wireless routers
- 802.11b/g applications
- Extends range of wireless networks

For sales information:

Telephone 800-323-3757




E-Mail [sales@pacwireless.com](mailto:sales@pacwireless.com)

or visit: [www.pacwireless.com](http://www.pacwireless.com)

## Specifications

Parameter	Model	Min	Typ	Max	Units
Frequency Range		2400		2483	MHz
Gain	IN24-65-8 IN24-90-7		8 7		dBi
Horizontal Beam Angle	IN24-65-8 IN24-90-7		65 90		degrees
Vertical Beam Angle			50		degrees
Front to Back		15			dB
Input Return Loss ( $S_{11}$ )			-14		dB
VSWR			1.5:1		
Impedance			50 $\Omega$		OHM
Input Power			100		W
Operating Temperature		-40		+70	Deg C
Weight		6.5 (0.18)			Lb (Kg)
Dimension (Dia x Height)		4" x 3.75" x 1" (102 x 95 x 25)			In (mm)

## Antenna Patterns

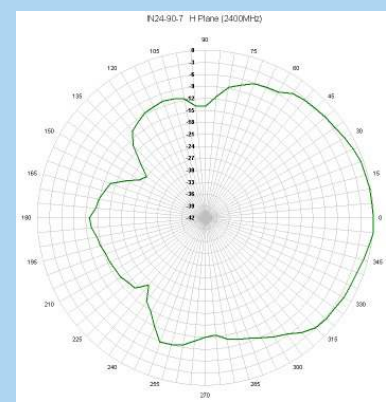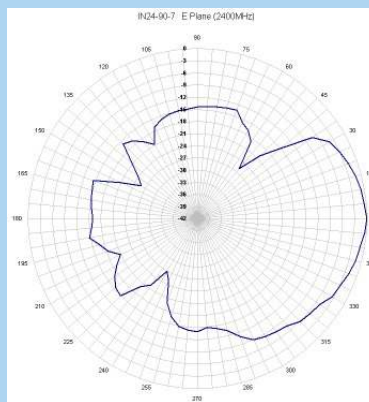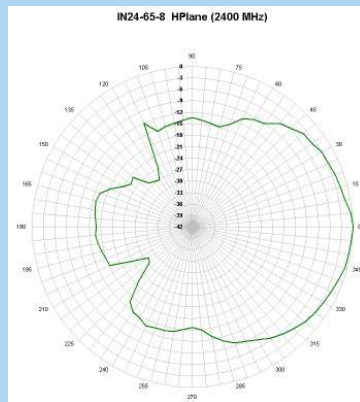

## System Ordering:

- IN24-65-8 2.4GHz 8dBi 65deg Indoor Directional Antenna
- IN24-90-7 2.4GHz 7dBi 90 deg Indoor Directional Antenna

## Notes:

- All shipments F.O.B. Schaumburg, IL 60173
- All antennas carry a 2 Year Warranty

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

*Specifications subject to change without notice.*



global solutions :  
local support™