


- NOTES:**
- MATERIALS:**
 HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
 FRONTSEALING: SILICONE VMQ BLUE
 CABLE SEALING: NBR BLACK
 JACK-SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
 CABLE STRAIN RELIEF: STEEL, NI-PLATED
 SCREWS: STEEL, NI-PLATED
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED
 - TEMPERATURE RANGE: -30°C TO +80°C
 - RECOMMENDED TORQUE FOR SCREW:
 35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED

* COMPLETELY TIGHTENED

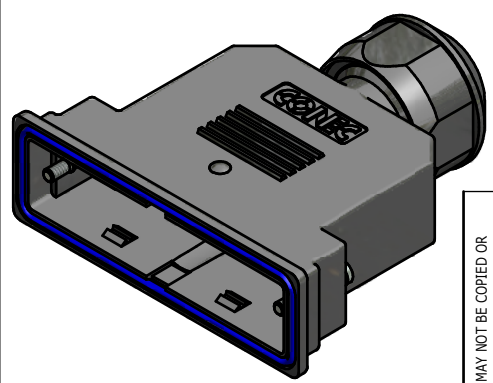

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance			dim. in mm	scale: 1,5:1 (1:1)	
	±0,3 unless otherw. specified				material: SEE NOTES	
	date			name		title:
	drawn 07.02.2014 Heinrich			appd. 07.02.2014 Huether		WATER RESISTANT D-SUB HOOD
	norm			d-old		SHIELDED 50 POS.
1 x b			A 5093		12.03.14 Heinrich	
a			Origin			
rev.			description		date name	
dwg no:			15K1A1446		DIN-A3	
part no:			15-004850		sh: 1	