

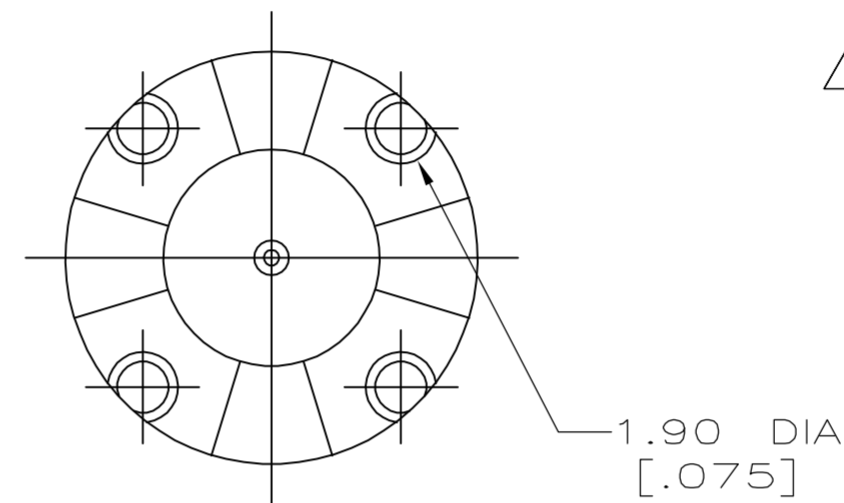


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		J	REVISED PER ECO-05-013873	23NOV05	BM	JL

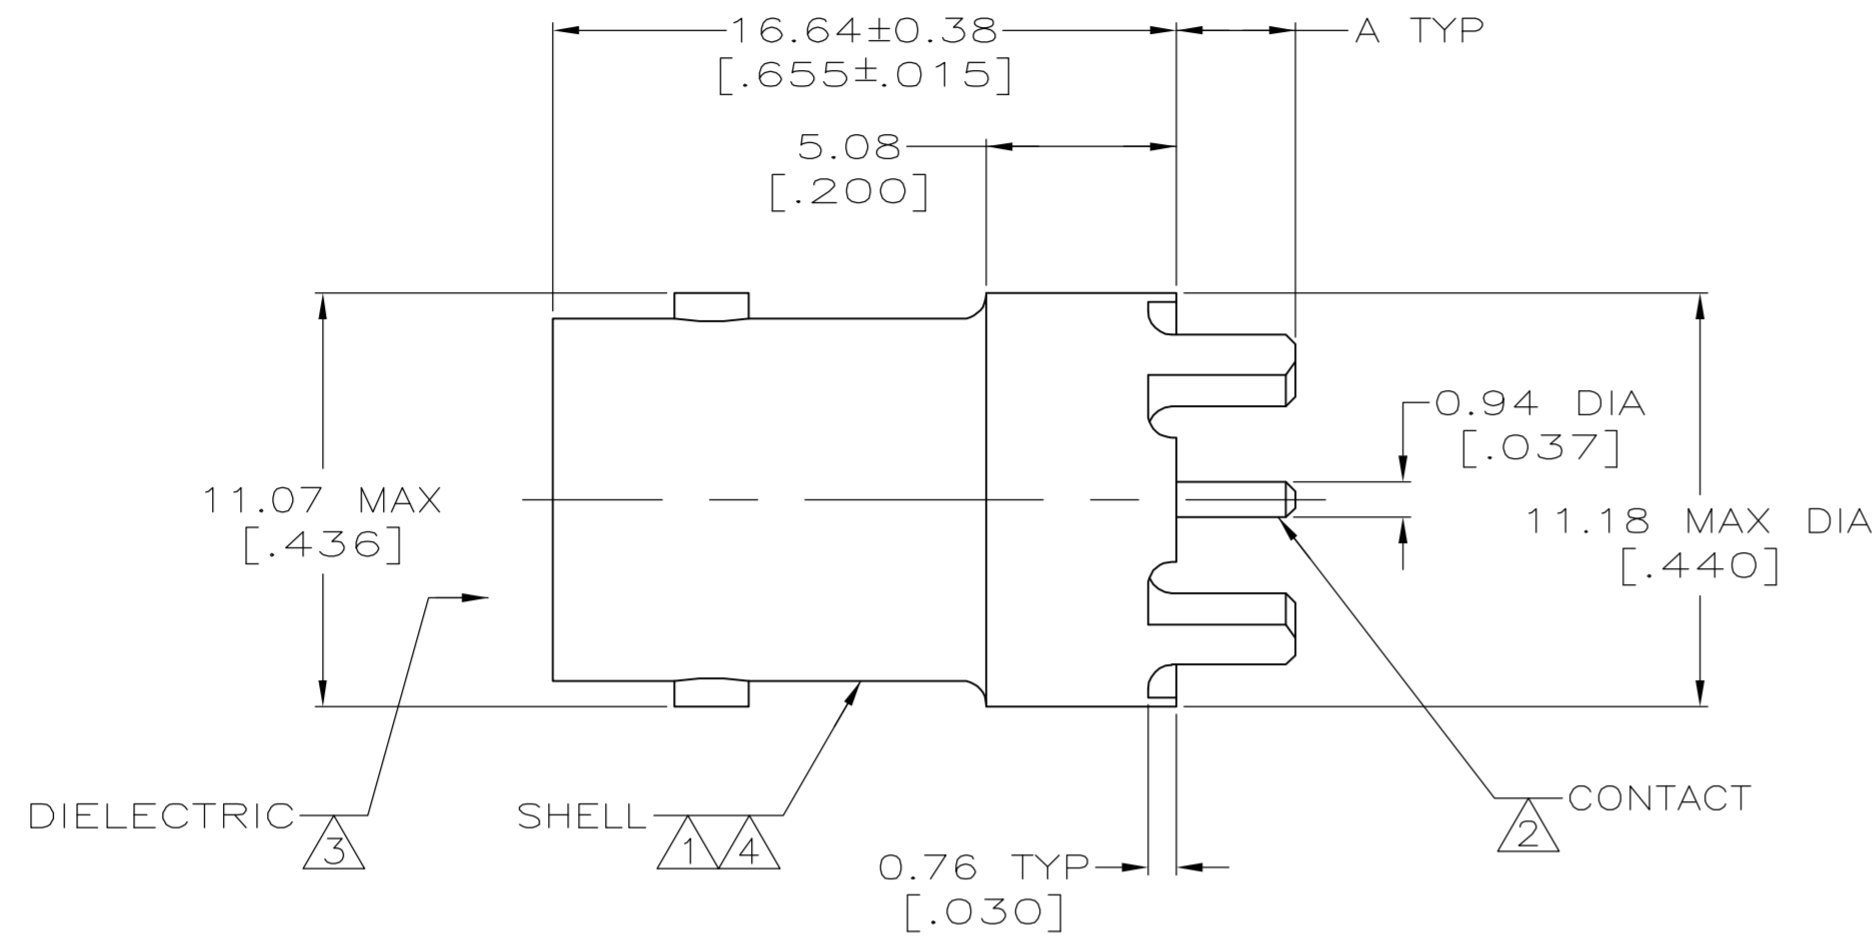

- 1 ZINC PER QQ-Z-363.
- 2 PHOSPHOR BRONZE PER ASTM-B-139.
- 3 POLYESTER PER ASTM-D-3220.
- 4 TIN-LEAD PLATE PER ASTM-B-545, 2.54 μm [.000100] MINIMUM THICK.
- 5 SILVER PLATE PER QQ-S-365 2.54 μm [.000100] MINIMUM THICK.
- 6 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 7. SEE INSTRUCTION SHEET 408-9889.

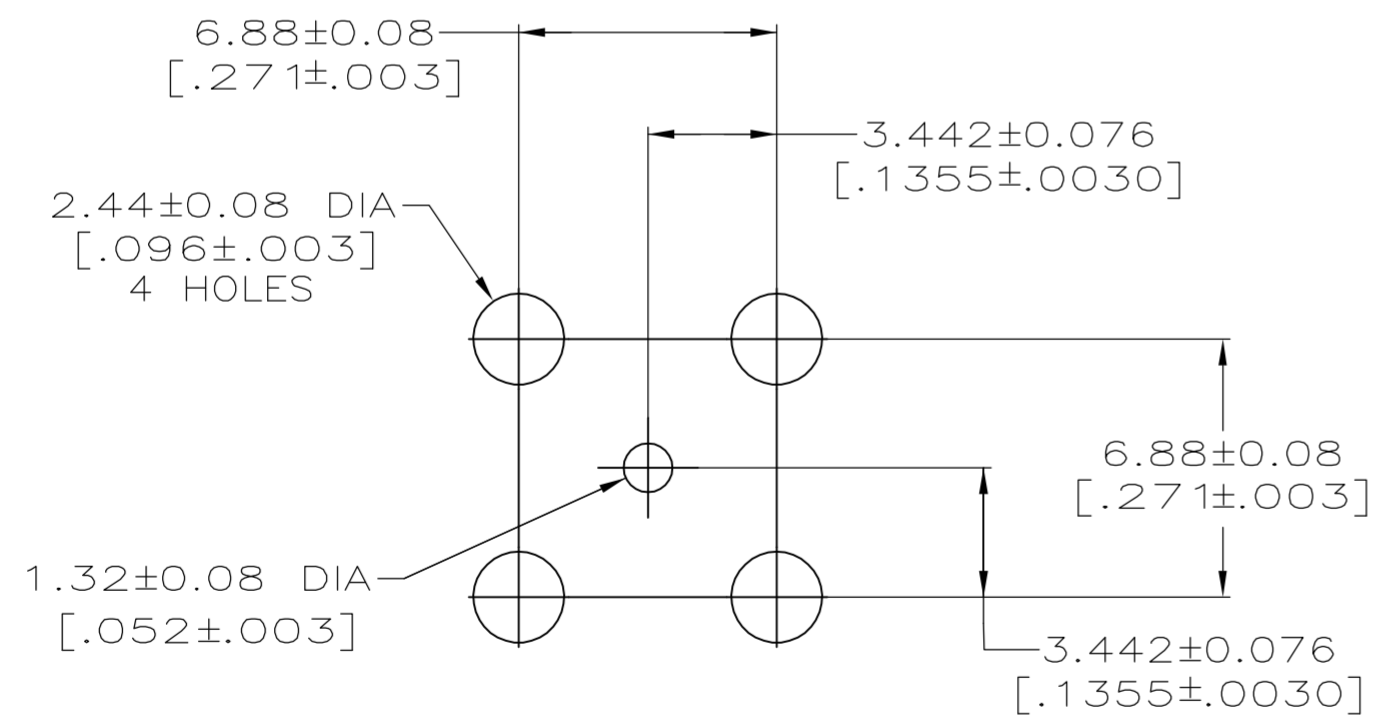

SUGGESTED PCB CONFIGURATION

OBSOLETE	6	4.44 [.175]	414305-4
OBSOLETE	6	3.17 [.125]	414305-3
OBSOLETE	5	4.44 [.175]	414305-2
	5	3.17 [.125]	414305-1
CONTACT FINISH		A	PART NO

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		Tyco Electronics Corporation	
INCHES		0 PLC ± -		J. LIPPERT 28APR92		Tyco Electronics Corporation	
		1 PLC ± -		CHK A. GABANY 20MAY92		Harrisburg, PA 17105-3608	
		2 PLC ± 0.20 [.008]		APVD A. GABANY 20MAY92		NAME	
		3 PLC ± -		PRODUCT SPEC		JACK, VERTICAL, PCB	
		4 PLC ± -		APPLICATION SPEC		50 OHM, COMMERCIAL BNC	
		ANGLES ± -		108-12078		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL		FINISH		WEIGHT		A2 00779 C=414305	
SEE NOTES 1 - 3		SEE NOTES 4 - 6		-		SCALE 5:1 SHEET 1 of 1 REV J	
CUSTOMER DRAWING							