
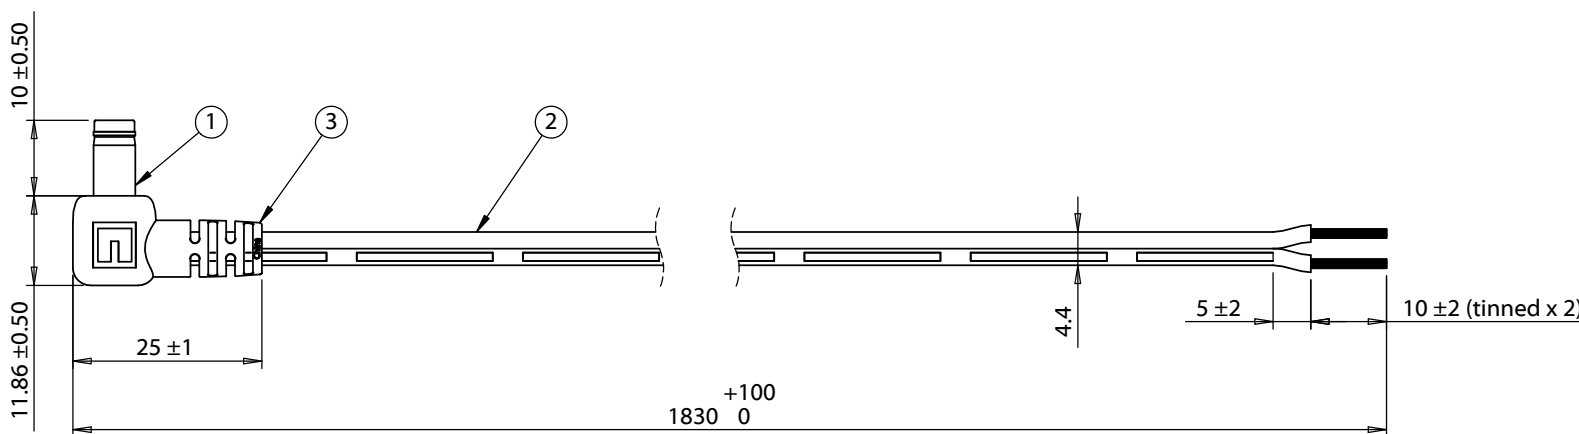


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	COMPONENT NOTES
1	50-00523	Connector, dc plug, 5.5x2.1xL18.5 mm, molding style, spring contacts, white insulators	1	
2	30-00396	Wire, 2C TS, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 87A, white	1	
3	24-00006	Overmold, PVC, white	1	



Notes:

Cables individually tied and bundled in groups of 10

Functionally equivalent components may be substituted

7 A, 12 Vdc

Wiring Diagram	
50-00523	wire color
center	white with stripe
sleeve	white

Revision:	Date:	Description:	Prepared:	Notes: RoHS compliant Function test: no open, no short circuit, no intermittent Description: Cable, 1830 mm, 5.5x2.1x10 mm 90° 50-00523 dc plug to stripped tinned, 18 AWG, 30-00396 wire, white	<h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p>
A	10/30/2014	Initial release	GL 2016.06.16 12:22:29 -07'00'		
			Verified: LA <small>Digitally signed by LA DN: cn=LA, o=Tensility Inc-Engineering, email=LA@20160623145923@tensility.com, c=US Date: 2016.06.23 14:59:23 -0700'</small>		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		
				Size: A	Part number: 10-01244
				Scale: 1:2	Sheet 1 of 1