


DO NOT SCALE FROM THIS PRINT

HTMS-1XX-XX-X-D-SM-XX-XXX-X-XX

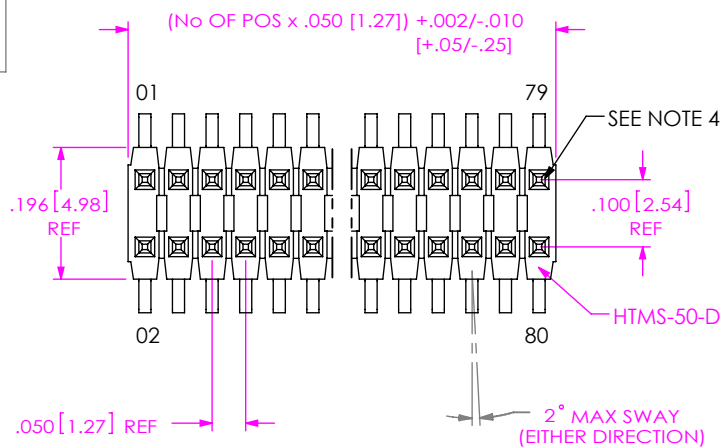

No OF POSITIONS

-02 THRU -40 (PER ROW)

LEAD STYLE

SEE TABLE 1

PLATING SPECIFICATION

- G: 10μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL
- T: MATTE TIN CONTACT AND TAIL
- S: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
- F: 3μ" FLASH SELECTIVE GOLD ON CONTACT AREA, MATTE TIN ON TAIL (LEAD STYLE -01, -51 & -52 ONLY)
- L: 10μ" LIGHT SELECTIVE GOLD ON CONTACT AREA, MATTE TIN ON TAIL

BODY SPECIFICATION

- D: DOUBLE (USE HTMS-50-D)

TAIL OPTION

- SM: SURFACE MOUNT

PACKAGING

- BLANK: TUBES (SEE NOTES 8, 9 & 10)
- TR: TAPE & REEL (SEE NOTES 10 & 11)
- FR: FULL REEL QTY TAPE & REEL (SEE NOTES 10 & 11)

PICK & PLACE OPTION

- P: PICK & PLACE PAD (USE PPP-22) (SEE SHT 2, FIG 3) (5 POS MIN)

POLARIZING OPTION

- XXX: POLARIZING SPECIFICATION (INDICATES POS TO BE OMITTED)

OPTION

- A: ALIGNMENT PIN STAKED (6 POS MIN) OR MOLDED (5 POS MIN) (SEE SHT 2, FIG 2) (SAMTEC'S DISCRETION)
- LC: LOCKING CLIP (SEE SHT 2, FIG 4) (5 POS MIN) (USE LC-05-X)

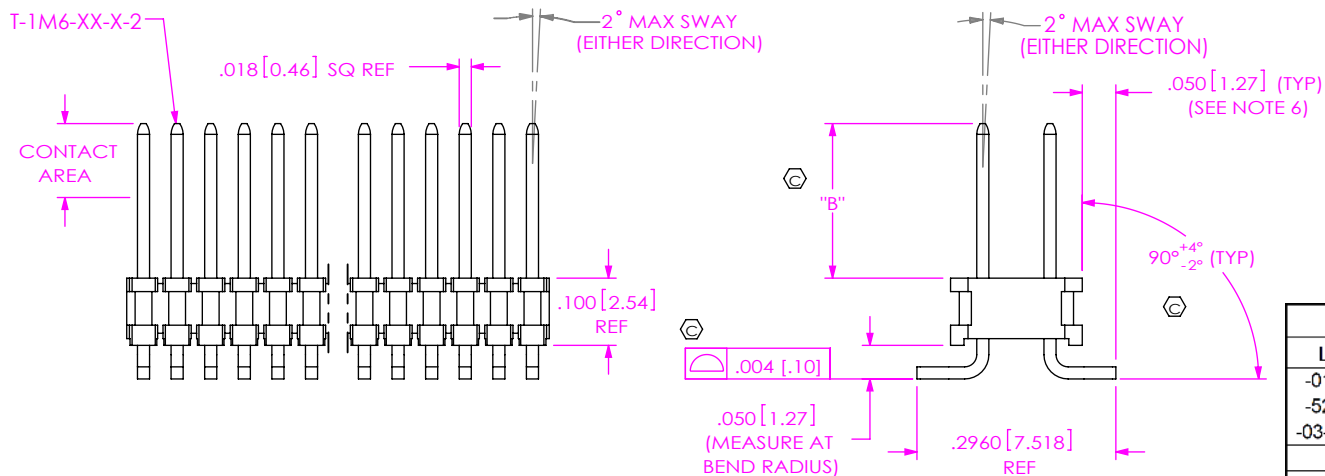


FIG 1 HTMS-1XX-XX-X-D-SM SHOWN

NOTES:

1. ⊕ REPRESENTS A CRITICAL DIMENSION.
2. MAXIMUM CUT FLASH: .010 [.25].
3. MINIMUM PUSHOUT FORCE: 2 LBS
4. MAXIMUM PIN ROTATION IN BODY: 2°.
5. MAXIMUM ALLOWABLE BOW: .005 [.13] INCH/INCH AFTER ASSEMBLY.
6. SHEAR TAILS TO DIMENSION SHOWN.
7. MAXIMUM BURR ALLOWANCE: .003 [.08]
8. TUBE POSITIONS -05 THRU -40 ONLY FOR THIS LEAD STYLE, UNLESS OTHERWISE NOTED, LAYER PACKAGE POSITIONS -02 THRU -04.
9. TUBE POSITIONS -07 THRU -40 ONLY FOR THIS LEAD STYLE, UNLESS OTHERWISE NOTED, LAYER PACKAGE POSITIONS -02 THRU -06.
10. ORDERS WILL BE PACKAGED ACCORDING TO THE SAMTEC PACKAGING EFFICIENCY STANDARDS (SPES) FOUND ON WWW.SAMTEC.COM.
11. ATTACH LABEL TO EACH REEL.

TABLE 1		
LEAD STYLE	TERMINAL SPEC.	"B"
-01	T-1M6-13-X-2	.230 [5.84]
-02	T-1M6-04-X-2	.100 [2.54]
-03	T-1M6-04-X-2	.125 [3.18]
-51	T-1M6-13-X-2	.190 [4.83]
-52	T-1M6-13-X-2	.205 [5.21]
-53	T-1M6-05-X-2	.285 [7.24]
-54	T-1M6-15-X-2	.335 [8.51]
-55	T-1M6-16-X-2	.390 [9.91]
-56	T-1M6-16-X-2	.405 [10.29]
-57	T-1M6-16-X-2	.430 [10.92]

TABLE 2		
LEAD STYLE	PACKAGING TUBE	PLUG
-01, -02, -03, -51 -52, -01-P, -02-P -03-P, -51-P, -52-P	PT-1-24-02-44	TP-03
-53, -54	PT-1-24-01-29 (SEE NOTE 8)	TP-03
-55, -56	PT-1-24-09-29 (SEE NOTE 8)	TP-03
-57	PT-1-24-02-46 (SEE NOTE 8)	TP-03
-53-P	PT-1-24-03-44 (SEE NOTE 9)	TP-03
-54-P, -55-P -56-P, -57-P	PT-1-24-01-44 (SEE NOTE 9)	TP-07

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES
 .XX: ±.01 [.3] 2°
 .XXX: ±.005 [.13]
 .XXXX: ±.0020 [.051]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1
 INSULATOR: BLACK, LCP, UL 94 VO
 TERMINAL: PHOS BRONZE


DESCRIPTION:
 HI-TEMP TERMINAL MICRO-STRIP (DOUBLE ROW)
 DWG. NO.

HTMS-1XX-XX-X-D-SM-XX-XXX-X-XX

BY: DEAN P 12/12/2000 SHEET 1 OF 2



520 PARK EAST BLVD, NEW ALBANY, IN 47150
 PHONE: 812-944-6733 FAX: 812-948-5047
 e-Mail info@SAMTEC.com code 55322

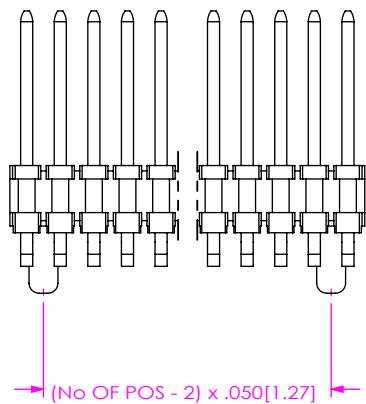

STAKED ALIGNMENT PIN
(6 POSITIONS MINIMUM)


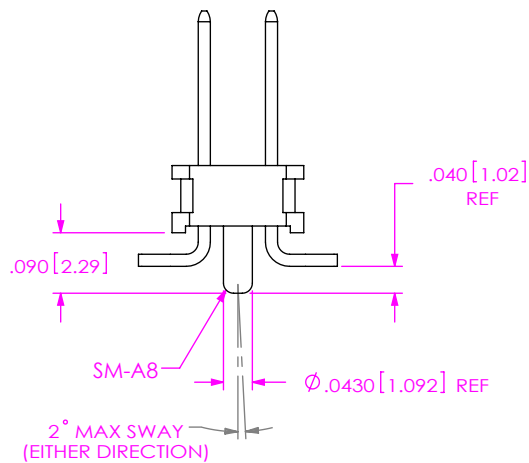


FIG 2
-A OPTION: ALIGNMENT PIN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

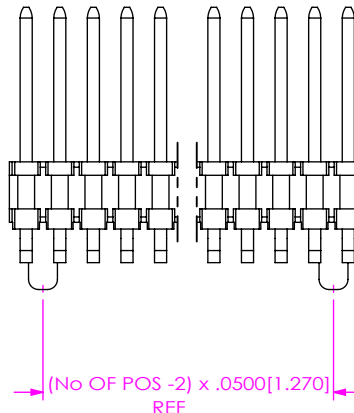

MOLDED ALIGNMENT PIN
(5 POSITIONS MINIMUM)

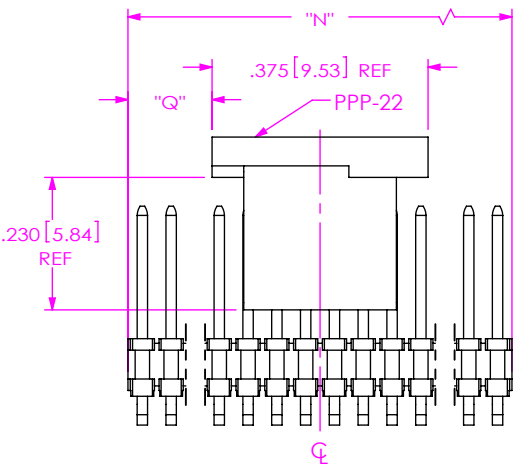
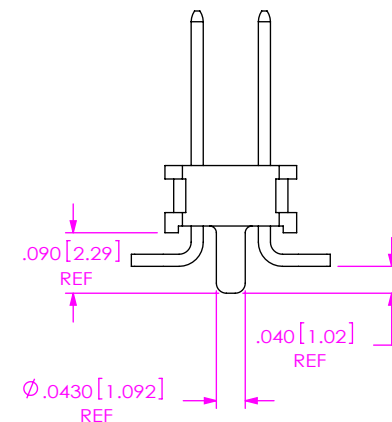


FIG 3
-P: PICK & PLACE
"N" = USE MEASURED DIM
"Q" = {("N" - .375 [.375]) / 2} ± .020 [.51]



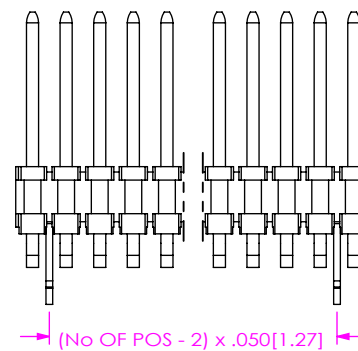


FIG 4
-LC OPTION: STAKED LOCKING CLIP
(5 POSITIONS MINIMUM)
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

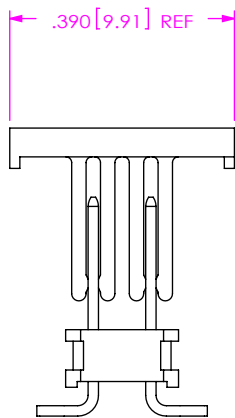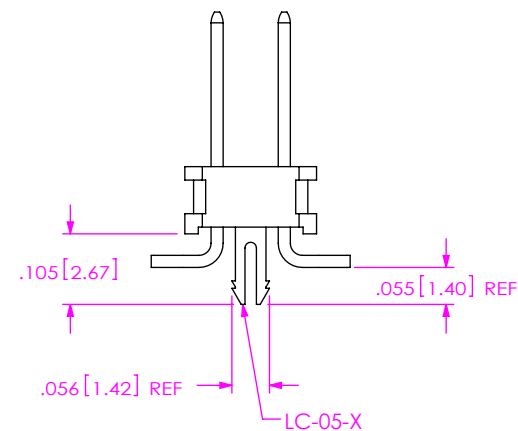

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:
HI-TEMP TERMINAL MICRO-STRIP (DOUBLE ROW)
DWG. NO.

HTMS-1XX-XX-X-D-SM-XX-XXX-X-XX

BY: DEAN P 12/12/2000 SHEET 2 OF 2