

<b>—</b>	G	т	m	D	0



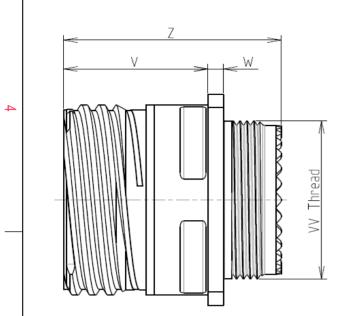

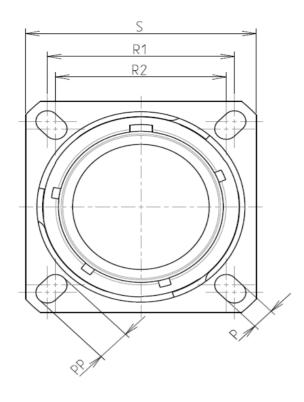

LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : S = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 $\sim$ 

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material : Stainless Steel : Nickel -Shell Plating -Insulator : Thermoplastic -Contacts : Copper Alloy : Silicon Elastomer -Seals & Grommet -Contact Plating : Gold over copper Alloy 0.8µm minimum -Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories : -65°C to +200°C -Temperature Range

: 500 hours

: 29.53 g ± 10%

8D 0

G

11

S

01

А

F


В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

CONTACT TYPE : PIN(500 Matings)

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recomment

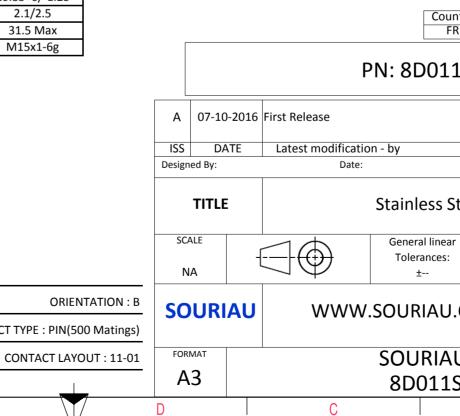

	Φ		A		_
					4
AS EX4	AMPLE				3
s which er of t indation untry FR	non-conformit ch does not co che Parties or b on, technical n Jurisd	mply with by a third par	ty		2
		CUSTOME	R DRAWING	MOD N°	
Steel Receptacle 8D series					
ar			PROJECT		
J.CC	DM	This do	cument is the pro SOURIAU st not be reproduc icated without pe	ced or	1
	DRG N°			SHEET	-
.S0	1AB-C		٨	1/2	J
	В		А		

		۵	н П	m	D	0
		Contact Layout				Panel Cutout
4		01			ţ.	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 11-01 X Y	]		* 	
ى ى	A	0 0	]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
2						Country FR PN: 8D011S
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
					TITLE SCALE NA	Stainless Ste General linear Tolerances: ±
					FORMAT A3	SOURIAU
l	Н	G	F	E	D	8D011S0

