




**120 ° Adjustable  
Illumination**



**6 ft Power Cord  
w/ 100V Plug**

|   |  |  |   |
|---|--|--|---|
| <b>High<br/>Brightness</b><br>20 Watt<br>LEDs | <b>Crack<br/>Resistant</b><br>Durable acrylic<br>diffuser lens | <b>IP67 Rated</b><br>Sealed to keep<br>out fluids, chips<br>& shavings | <b>Angle Light<br/>0° - 120°</b><br>Adjustable<br>mounting<br>bracket |
|---|--|--|---|

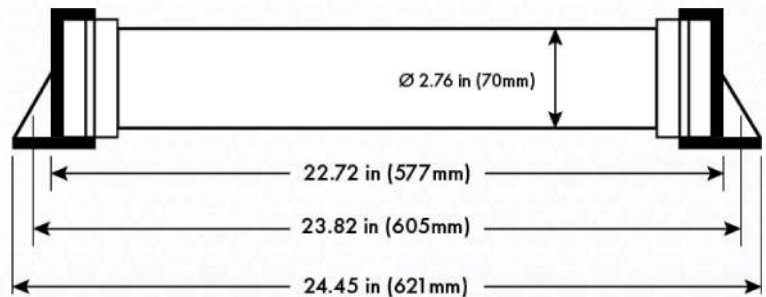

# Machine Light

## Tubular LED Machine Light 20 Watt 22.72 in (577mm)

Aven's LED machine lights are designed to provide even, ultra high brightness and a wide illumination angle for use with machining centers, semiconductor manufacturing equipment, workshops, clean rooms etc. This Tubular LED Machine Light is 22.72 in (577mm) in length with a diameter of 2.76 in (70mm). The LED lights provide 40,000 hours of life. The acrylic diffuser lens is crack resistant and provides even light distribution. The machine light is IP67 rated and comes with a mounting bracket with hardware and a 6ft cable with 110V plug.

### Key Features

- Long life LEDs (40,000 hours)
- Illuminance: 520 lux at 47 inches (1.2 meters)
- Wide illumination angle
- IP67 rated
- Sealed to keep out fluids, chips and shavings
- Crack resistant durable acrylic diffuser lens
- Built-in Ballast

| Machine Light                                      |   |
|--|---|
| Tubular LED Machine Light 20 Watt 22.72 in (577mm) |   |
| <b>Item #</b>                                      | 26600-503   |
| <b>Input Voltage</b>                               | AC100-240V 50/60 HZ   |
| <b>LED Watts</b>                                   | 20 watts  |
| <b>Illuminance</b>                                 | 520 lux at 47 in (1.2meters)  |
| <b>Color Temperature</b>                           | 5700K   |
| <b>Illumination Angle</b>                          | 0° - 120° Degrees   |
| <b>Rating</b>                                      | IP67  |
| <b>Lens Type</b>                                   | Acrylic   |
| <b>Cable Length</b>                                | 6 ft with 110V Plug   |
| <b>Operating Temperature Range</b>                 | -30°C to +40°C<br>-22°F to +104°F   |
| <b>Package Contents</b>                            | <ul style="list-style-type: none"> <li>• Machine Light</li> <li>• Mounting Bracket w/ Hardware</li> <li>• 6ft cable w/ 110V plug</li> </ul> |