
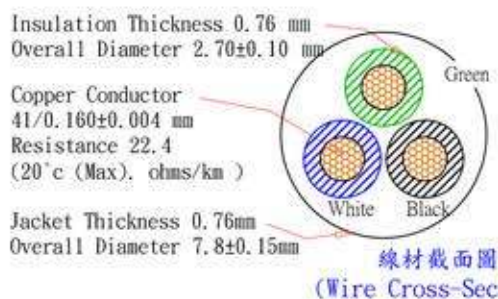


插頭部件 (Plug Component)			頭部包皮尺寸 (Plug strip dimension)			線材規格(Wire Spec.)	尾部包皮尺寸 (Terminal roj & Strip)			尾部處理 (Terminal Component)		
顏色(Color)	零件描述(Component)	數量(Q'ty)	內剝(Strip)	外剝(Roj)	顏色(Color)	SJT 18AWG/3C  105°C 灰色(Gray)  線長: (Length) 1841.5 <sup>+50.8</sup> <sub>-12.7</sub>	外剝(Roj)	內剝(Strip)	顏色(Color)	零件描述(Component)	顏色(Color)	數量(Q'ty)
35P透明 90A±2A Clear	FM-2 (10A 125V-) (NEMA5-15P)	1	10±1	60±2	黑/Black(L)		15±1	5 <sup>+1</sup> <sub>-0</sub>	黑/Black(L)	ME-302 (10A 125V-) (IEC 320 C13) 電腦電源線端子	35P透明 90A±2A Clear	1
鍍鎳 Nickel-Plated	4.75 U型圓管 4.75 Grounding	1	10±1	60±2	白/White(N)		15±1	5 <sup>+1</sup> <sub>-0</sub>	白/White(N)	Computer power cord terminals 302兩件式內模 (302 Inner Body)	銅本色(Copper)	3
鍍鎳 Nickel-Plated	6.3*1.5 單片圓頭端子 (Solid Blades)	2	20±1	75±2	綠/Green(E)		15±1	5 <sup>+1</sup> <sub>-0</sub>	綠/Green(E)		白色(White)	1
鍍鎳 Nickel-Plated	墊片 (Gasket)	3										

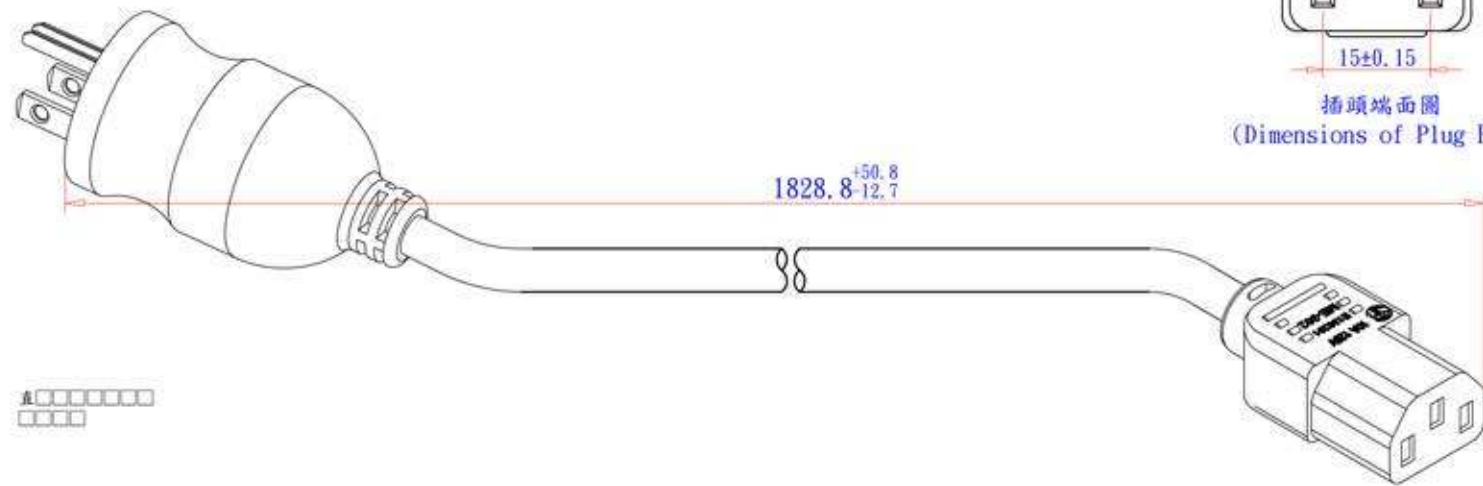

包裝方式(Packing)	
扎線方式 (Bulk Pack)	每 10 條一扎 Per 10 pcs/Ties
紙箱尺寸 (Carton Size)	480 X 320 X
包裝數量 (Packing Qty) 標籤(Label)	PCS UL Detachable Label
正側事項 (Carton Print)	依客戶要求印刷 (See Purchase Order)
電線印字內容 Wire Printed	使用克實 線材 凹印字 (In-Filler, Gravure)
V E322763 (UL) SJT 18AWG(0.824mm <sup>3</sup> )x3C VW-1 105°C 300V JIT c(UL) SJT 18AWG(0.824mm <sup>3</sup> )x3C FT2 105°C 300V -LF- (UL) SJT 18AWG(0.824mm <sup>3</sup> )x3C VW-1 105°C 300V E77975 WONDERFUL-D CSA SJT 18AWG(0.824mm <sup>3</sup> )x3C FT2 105°C 300V LL43774 -F- -LF-	紙箱事項標註 Shipping Mark

1. 高壓測試: 1500V/1Sec <1mA (Hi-Pot Test: 1500v/1Sec <1mA)	CnC
--	-----

SIZE: A4
UNIT: mm
SCALE: 1:1
PROJ.

SIGNATURE	NAME	DATE
APPROVED		
M.F.G. CHECKED		
Q.A. CHECKED		
DRAWN	楊承正	2011/11/28
CUSTOMER		

REV	DATE	DESCRIPTION	SYMBOL
00	2011/11/28	新版發行	楊承正
PART No.		800-18-00D-GR-0006F	
DWG No.			

**CnC Tech, LLC**  
Industrial Cable and Connector Technology