

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:	EC NO. DRWN: CHK: APPR:
----------------------------------	----------------------------------	----------------------------------	----------------------------------

RELEASED EC NO. JD2000-0289 DRWN: HIRATA '99/09/27 CHK: MSASAO '99/09/27 APPR: HIKESUGI '99/09/27	DESCRIPTION SEE NOTES	MATERIAL 材料 SEE NOTES	FINISH 仕上り SEE NOTES
0	REV	WIRE RANGE 通所線範囲	INS. RANGE 被覆外径

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差	SCALE 2-1	DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH
10 UNDER 未満	+0.2	DRWN BY & DATE H. Hirata '99/09/27
10 OVER 以上	+0.25	CHECKED BY & DATE H. Sarai '99/09/27
30 OVER 以上	+0.3	APPROVED BY & DATE H. Sarai '99/09/27
ANGLE 角度	+3°	CAD FILENAME SD-55244-008.S01


DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY		SHT REV
THIRD ANGLE PROJECTION		REVISE ON CAD ONLY
TITLE: CF CARD CONN. 50P HEADER ASS'Y (NORMAL TYPE)		
MATERIAL NO. 55244-5021		
DRAWING NO. SD-55244-008		
SHEET NO. 1 OF 2		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		

55244-5021
MODEL No.

DWG. NO. SD-55244-008

注) NOTES

- 材質 MATERIAL
ハウジング : ガラス入り耐熱樹脂 UL94V-0
HOUSING: LIQUID CRYSTAL POLYMER GLASS FILLED UL94V-0
ピン : リン青銅
PIN: PHOSPHOR BRONZE
ネール : リン青銅
NAIL: PHOSPHOR BRONZE
 - メッキ仕様 PIN 接点部 金めっき
PLATING CONTACT AREA GOLD PLATING
半田付け部 半田めっき
SOLDER TAIL AREA TIN-LEAD PLATING
下地めっき ニッケルめっき
UNDERPLATING NICKEL PLATING
NAIL 接点部 金めっき
CONTACT AREA GOLD PLATING
半田付け部 半田めっき
SOLDER TAIL AREA TIN-LEAD PLATING
下地めっき ニッケルめっき
UNDERPLATING NICKEL PLATING
 - 推奨基板厚 : t0.8 MIN.
RECOMMENDED P.C.B. THICKNESS: t0.8 MIN.
 - 適合カード厚 : 3.3±0.1 (TYPE I) AND 5 MAX. (TYPE II)
RECOMMENDED CARD THICKNESS: 3.3±0.1 (TYPE I) AND 5 MAX. (TYPE II)
 - 適合カード幅 : 42.8±0.1
RECOMMENDED CARD WIDTH: 42.8±0.1
 - ハウジング色 : 黒
HOUSING COLOR: BLACK
- △ 寸法適用極 : 1,13,38,50
THIS DIMENSION APPLIES TO CIRCUIT NUMBERS 1,13,38 AND 50.
- △ 寸法適用極 : 25,26
THIS DIMENSION APPLIES TO CIRCUIT NUMBERS 25 AND 26.
- △ ピンの倒れは、ピン根元を基準に全方向へ0.1 MAX.とする。
PIN TIP LEAN TOWARD ANY DIRECTION NOT TO EXCEED 0.1 WHEN MEASURED FROM PIN BASE.
- △ ピン根元に適用する。
THIS DIMENSION TO BE MEASURED AT PIN BASE.
- △ ソルダータール及びネールは、Z面を基準とし上へ0.05 下へ0.15の範囲にあり、且つソルダータールの平坦度は、0.12 MAX. とし、テール先端にて測定する。
SOLDERTAILS AND FITTING NAILS TO BE WITHIN 0.05 UPWARD AND 0.15 DOWNWARD FROM Z-DATUM PLACE, AND COPLANARITY OF SOLDERTAILS TO BE WITHIN 0.12.
MEASUREMENT POINT IS SOLDERTAILS TIP.

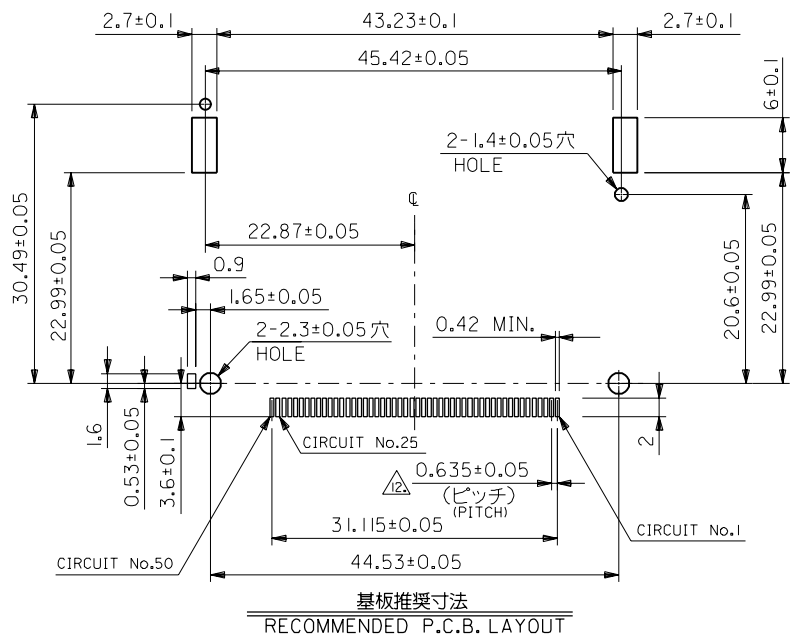

- △ 公差非累積
NON-CUMULATIVE
- △ テールとネールを併せた平坦度は、0.12 MAX.とする。
TOTAL COPLANARITY OF SOLDER TAILS AND FITTING NAILS TO BE 0.12 MAX.
- △ ボタンストロークが (6 mm) の時、カード飛び出し量は (3.25mm)。
WHEN BUTTON PUSH STROKE IS (6mm), CARD OUT BY (3.25mm).
15. 適合 SHEEL ASS'Y : 55246-001* , 58773-0010
APPLICABLE SHELL ASS'Y : 55246-001* , 58773-0010

DO NOT SCALE DRAWING

EC NO. DRWN: CHK: APPR:				SEE SHEET 1 OF 2				MATERIAL 材料 SEE NOTES		GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 2-1 DESIGN UNITS <input checked="" type="checkbox"/> mm <input type="checkbox"/> INCH		DIMENSIONS: <input type="checkbox"/> mm <input type="checkbox"/> INCH <input checked="" type="checkbox"/> mm ONLY		SHT 1 REV			
EC NO. DRWN: CHK: APPR:				SEE SHEET 1 OF 2				FINISH 仕上げ SEE NOTES		10 UNDER 未満 ±0.2		DRAWN BY & DATE H. Wrota '99/09/27		TITLE: CF CARD CONN. 50P HEADER ASS'Y (NORMAL TYPE)					
EC NO. DRWN: CHK: APPR:				SEE SHEET 1 OF 2				30 OVER 以上 未満 ±0.25		CHECKED BY & DATE H. Sato '99/09/27									
EC NO. DRWN: CHK: APPR:				SEE SHEET 1 OF 2				WIRE RANGE 適用電線規格 #		30 OVER 以上 ±0.3		APPROVED BY & DATE (Signature) '99/09/27		MOLEX INCORPORATED					
EC NO. DRWN: CHK: APPR:				SEE SHEET 1 OF 2				INS. RANGE 被覆外径 #		ANGLE 角度 ±3°		CAD FILENAME SD-55244-008.S02						MATERIAL NO. 55244-5021	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.																			