

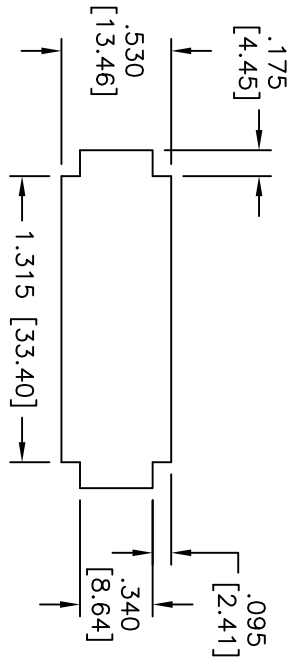
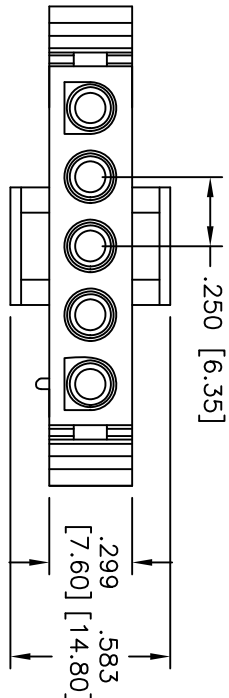


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/22/10	
A		REDRAWN	08/30/12	



Panel hole dimensions

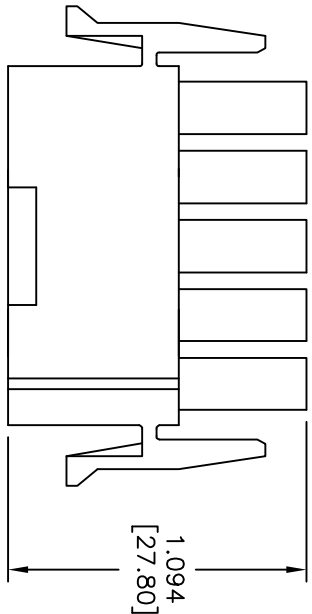

**SPECIFICATIONS:**

**Material:**  
 Insulator: Nylon66, rated UL94V-2  
 Insulator color: Natural  
**Electrical:**  
 Current rating: 13A  
 Voltage rating: 600V  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 5000 VAC for 1 minut  
 Temperature range: -55°C to +105°C  
**Environmental:**  
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED  
 INCHES Holes  
 .X ± .10 ØX ± .10  
 .XX ± .020 ØXX ± .015  
 .XXX ± .015 ØXXX ± .010

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 6.35MM PITCH CONNECTOR, SINGLE ROW HOUSING, MALE, 5 POSITION

APPROVALS	DATE
DRAWN	11/22/10
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	DME-M-05	A
REF:	S00723T	SCALE: NTS
		SHEET 1 OF 1