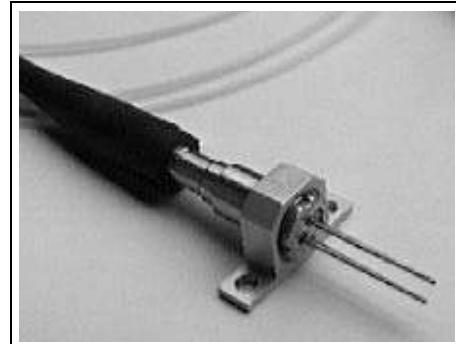


**1300 nm Laser in Coaxial Package with SM-Pigtail,  
High Power****STH 51004X  
STH 51005X**

- Designed for application in fiber-optic networks
- Laser Diode with Multi-Quantum Well structure
- Suitable for bit rates up to 1 Gbit/s
- Ternary photodiode at rear mirror for monitoring and control of radiant power
- Hermetically sealed subcomponent, similar to TO 18
- SM Pigtail with optional flange



Type	Ordering Code	Connector/Flange
STH 51004G	Q62702-P3002	FC / without flange
STH 51004A	Q62702-Pxxxx	DIN / without flange
STH 51005G	Q62702-P3083	FC / with flange
STH 51005A	Q62702-Pxxxx	DIN / with flange

**Component with other connector types on request.****Maximum Ratings**

Output power ratings refer to the SM fiber output. The operating temperature of the submount is identical to the case temperature.

Parameter	Symbol	Values	Unit
<b>Module</b>			
Operating temperature range at case	$T_c$	- 40 ... + 85	°C
Storage temperature range	$T_{stg}$	- 40 ... + 85	°C
Soldering temperature $t_{max} = 10$ s, 2 mm distance from bottom edge of case	$T_s$	260	°C

**Laserdiode**

Direct forward current	$I_F$ max	120	mA
Radiant power CW	$\Phi_e$	4	mW
Reverse voltage	$V_R$ max	2	V

**Maximum Ratings (cont'd)**

Parameter	Symbol	Values	Unit
<b>Monitor Diode</b>			
Reverse voltage	$V_R$ max	10	V

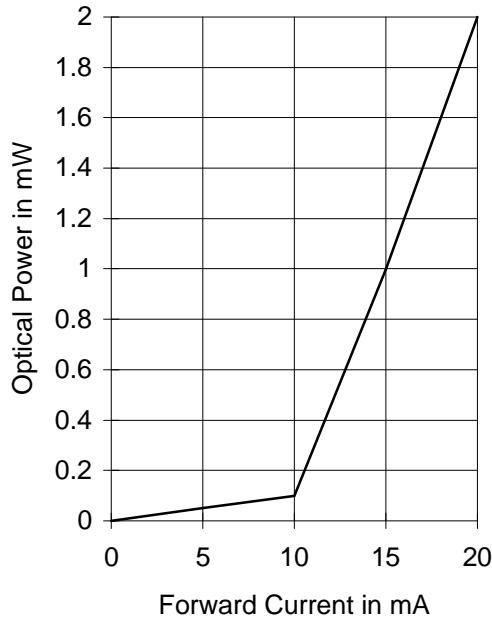
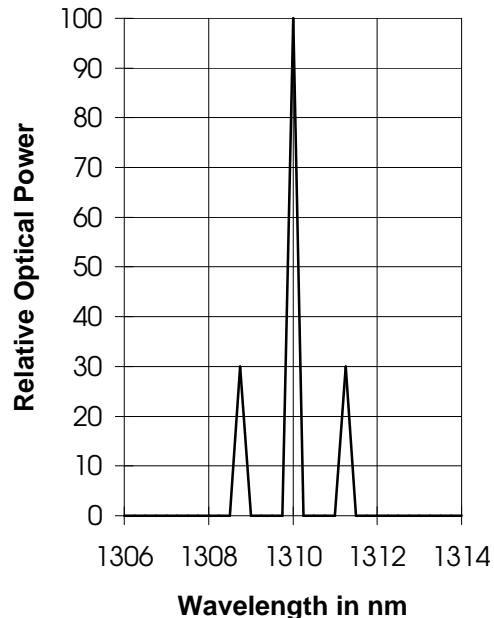
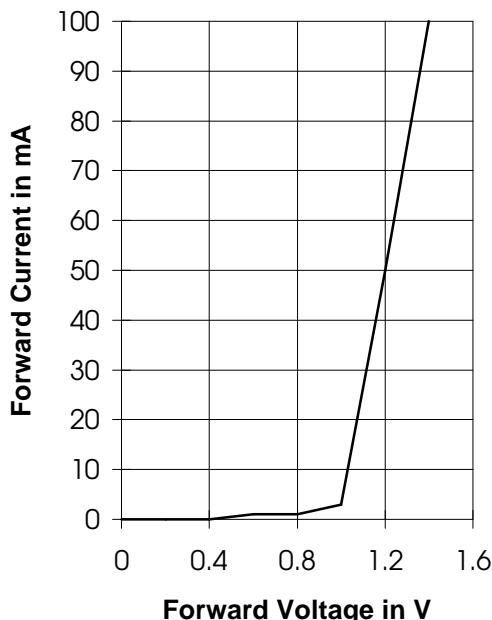
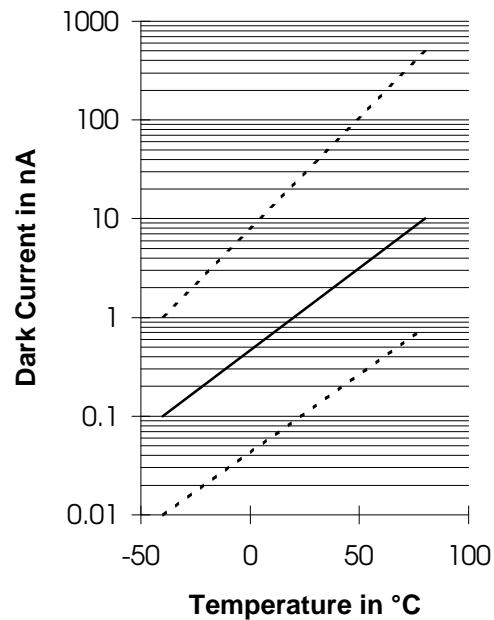
**Characteristics**

All optical data refer to a coupled 10/125  $\mu\text{m}$  SM fiber,  $T_C = 25^\circ\text{C}$ .


Parameter	Symbol	Values	Unit
<b>Laser Diode</b>			
Optical output power	$\Phi_e$	> 2.4	mW
Emission wavelength center of range $\Phi_e = 0.5 \text{ mW}$	$\lambda$	1280 ... 1330	nm
Spectral bandwidth $\Phi_e = 0.5 \text{ mW}$ (RMS)	$\Delta\lambda$	< 5	nm
Threshold current ( $-40 \dots +85^\circ\text{C}$ )	$I_{th}$	2 ... 45	mA
Forward voltage $\Phi_e = 0.5 \text{ mW}$	$V_F$	< 1.5	V
Radiant power at threshold	$\Phi_{eth}$	< 80	$\mu\text{W}$
Slope efficiency	$\eta$	40 ... 160	mW/A
Differential series resistance	$r_S$	< 8	$\Omega$
Rise time/Fall time	$t_R, t_F$	< 1	ns

**Monitor Diode**


Dark current, $V_R = 5 \text{ V}$ , $\Phi_e = 0$	$I_R$	< 500	nA
Photo current, $\Phi_e = 0.5 \text{ mW}$	$I_P$	100 ... 1000	$\mu\text{A}$

**Laser Diode**  
Radiant Power in Singlemode Fiber**Relative Radiant Power**  
 $\Phi_e = f(\lambda)$ **Laser Forward Current**  
 $I_F = f(V_F)$ **Monitor Diode Dark Current  $I_R = f(T_A)$**   
 $\Phi_{port} = 0, V_R = 5 \text{ V}$ 

## Package Outlines (Dimensions in mm)

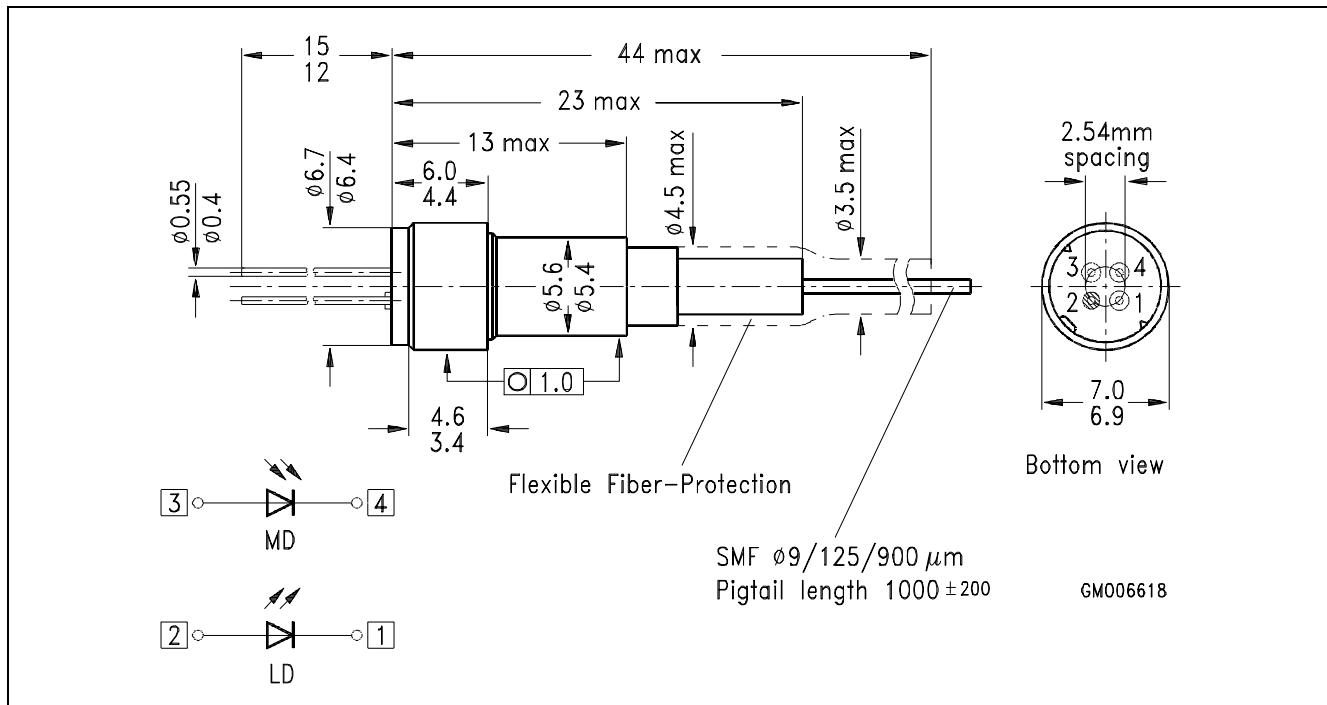

**STH 51004X**

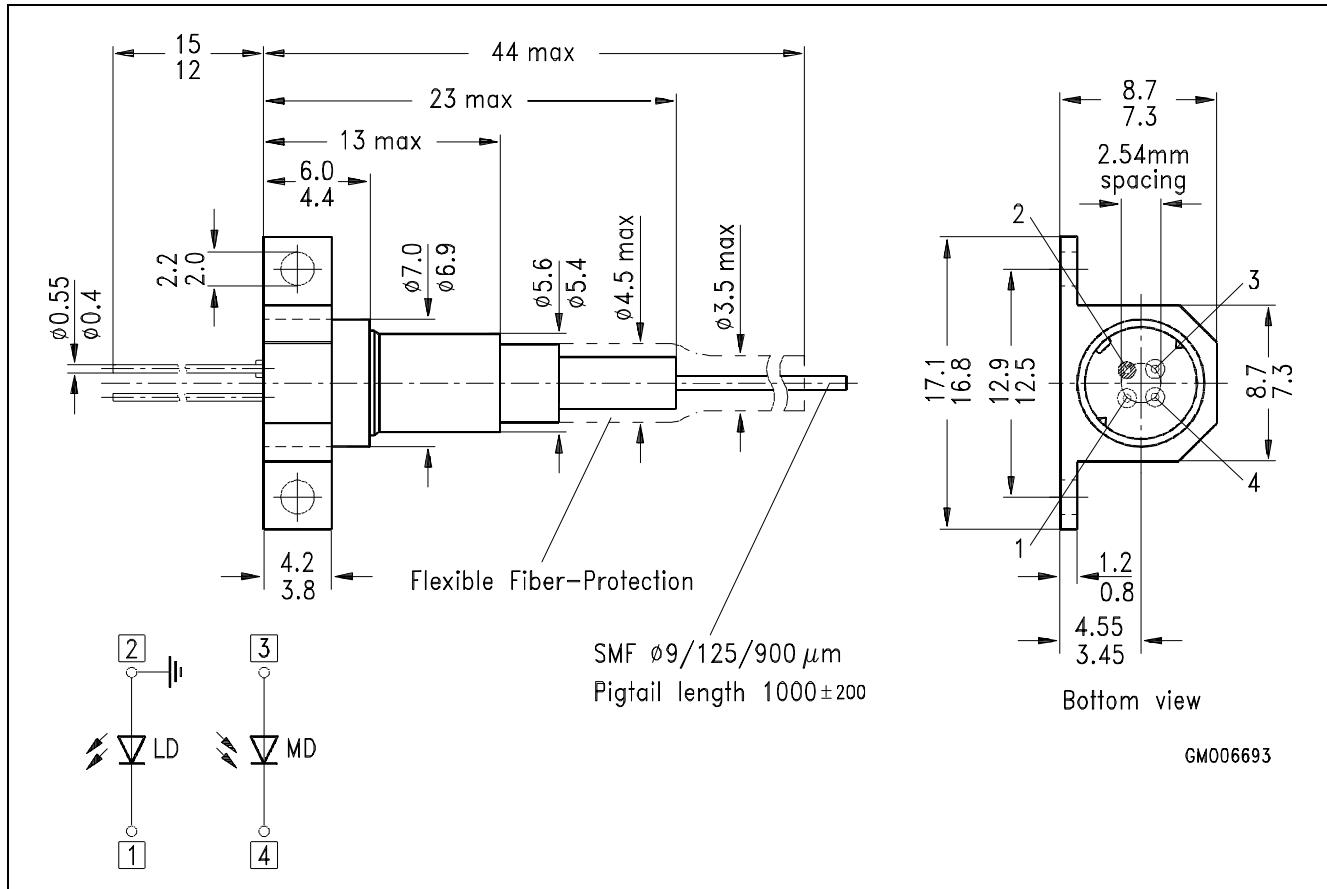

**STH 51005X (with flange)**