



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE30102 LED – Dual Color 3mm Super Fresh Red/Super Yellow Green

**Features:**

- RoHS Compliant
- Water Clear
- Common Cathode Pin Configuration

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Power Dissipation, $P_d$ .....	100mW
Continuous Forward Current, $I_F$ .....	25mA
Peak Forward Current (1/10 Duty Ratio, 0.1ms Pulse Width), $I_{FM}$	
Super Fresh Red .....	50mA
Super Yellow Green .....	80mA
Reverse Voltage, $V_R$ .....	5V
LED Junction Temperature, $T_j$ .....	+100°C
Operating Temperature Range, $T_{opr}$ .....	-25°C to +85°C
Storage Temperature Range, $T_{stg}$ .....	-40°C to +100°C
DIP Soldering Temperature (During Soldering, 3mm from body, 5sec max), $T_L$ .....	+260°C



**Electro-Optical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
View Angle of Half Power	$2\theta$ 1/2	IF = 20mA	-	20	-	deg
Forward Voltage	VF	IF = 20mA	-	2.00	2.50	V
Super Fresh Red				2.20	2.50	V
Reverse Current	IR	VR = 5V	-	-	10	µA
Luminous Intensity (Note 1)	IV	IF = 20mA	400	1000	-	mcd
Super Fresh Red				600	-	mcd
Peak Emission Wavelength	$\lambda_p$	IF = 20mA	-	635	-	nm
Super Yellow-Green				575	-	nm
Dominate Wave Length (Note 2)	$\lambda_d(\text{HUE})$	IF = 20mA	-	626	-	nm
Super Yellow-Green				572	-	nm

Note 1. Luminous intensity is measured with an Exeltron 2001, Tolerance = 30%.

Note 2. The dominate wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the color of the device.



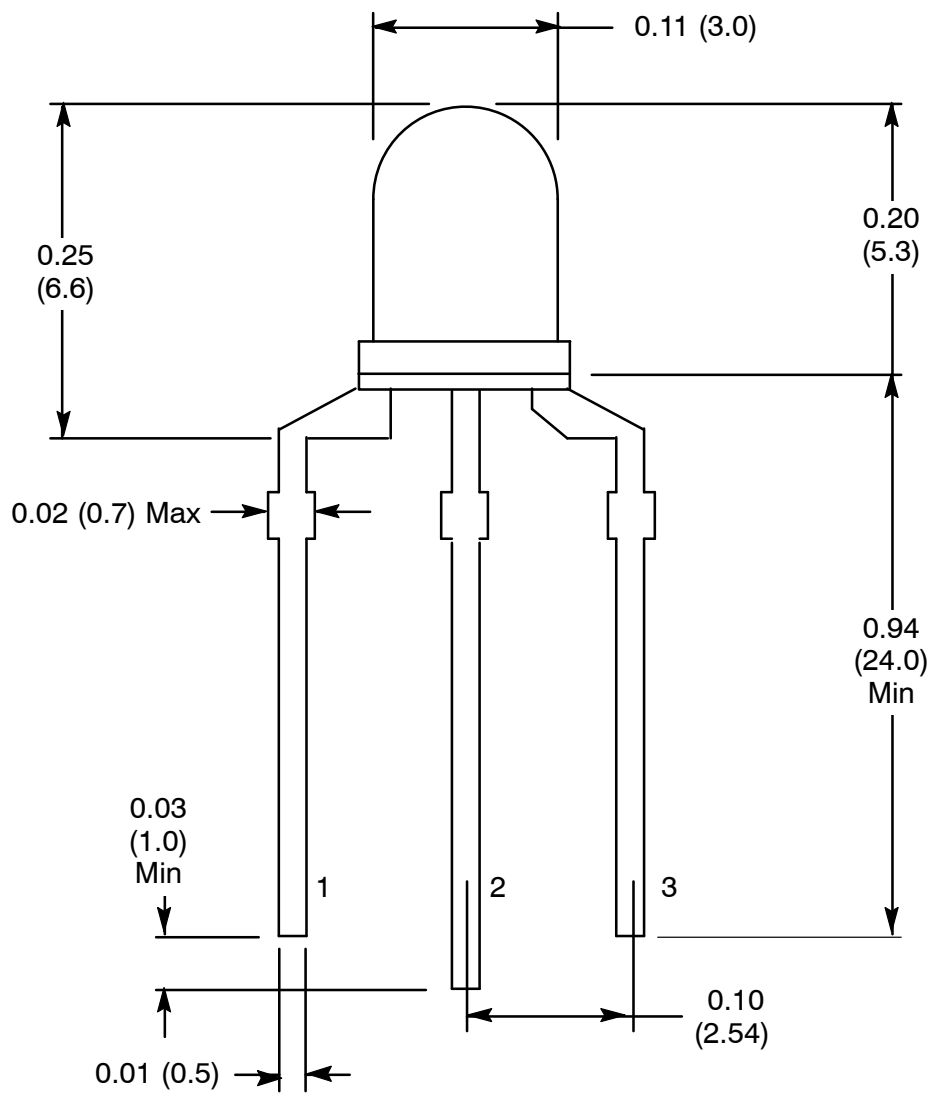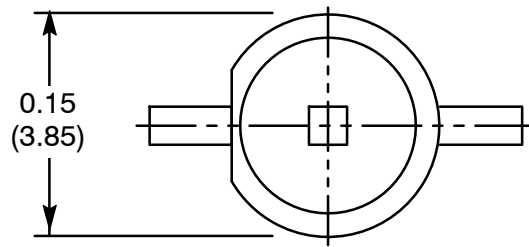

1. Red +
2. Common Cathode Lead -
3. Green +