

Ratings

Voltage: 300 V
Temperature: 105 °C
Flammability: VW-1



Conductor

Conductor count: 2
Gauge: 26 AWG 0.14 mm²
Material: bare copper strands
Strand size: Ø 0.16 mm x 7
Maximum resistance at 20 °C: 140 ohms/km

Outer jacket

Material: XLPE, LSZH (low smoke zero halogen)
Color: red and black
Diameter: 2.6 ±0.15 mm (1.3 ±0.10 x 2)
Nominal thickness: 0.37 mm
Resistance at 20 °C: 100 MΩ /km min

Wire marking: E339579 UL AWM STYLE 4384 26 AWG 105°C
300V VW-1 TENSILITY

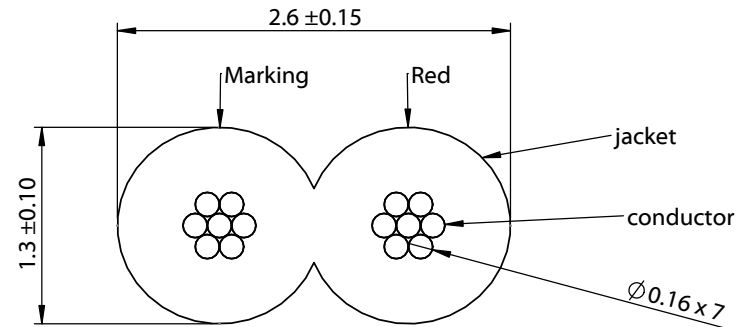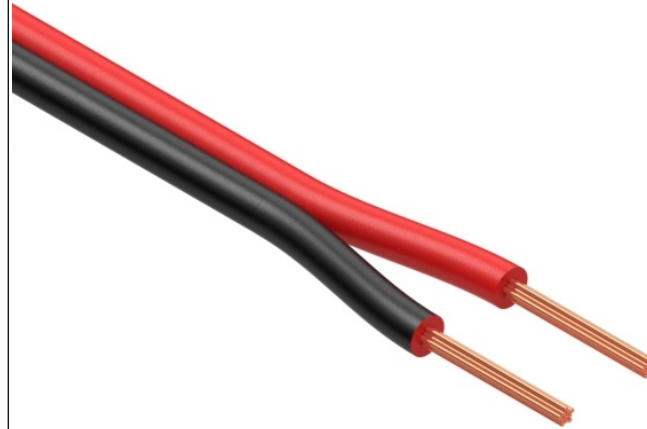


Revision:	Date:	Description:
A	9/1/2022	Initial release

Prepared: PB <small>Digitally signed by PB Date: 2022.09.05 08:25:18 -07'00'</small>
Verified: JD <small>Digitally signed by JD Date: 2022.09.08 09:22:07 -07'00'</small>
Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm

Notes: RoHS compliant
Function test: no open, no short circuit, no intermittent
Description: Wire, 2C, 26 AWG, UL4384, 300V, 105C, 2.6 mm, VW-1, LSZH, XLPE, red and black

TENSILITY

tel 1.541.323.3228 800 877.670.7118
fax 1.541.323.4202 web tensility.com

Size: A	Part number: 30-02860
Scale: 20:1	
Sheet 1 of 1	