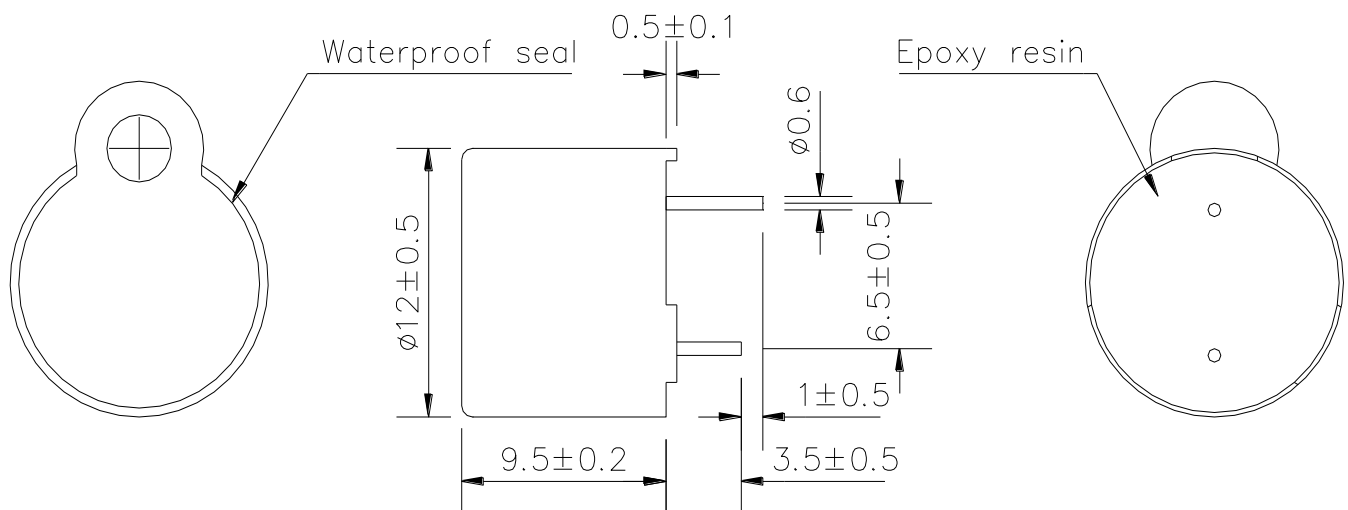


**Sales Outline Drawing****Revision E**

**May not be suitable for all medical and aerospace applications.  
Specifications: Contact Mallory Sonalert to discuss your application.**

**NO CIRCUITRY**

Oscillation Frequency (Hz)	2400
Operating Voltage (Vp-p)	9.0 ~ 15
Rated Voltage (Vp-p)	12
Current Consumption Max. (mA)	40 at Rated Voltage
Sound Pressure Level (dB/min)	85 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	140 $\pm$ 21
Operating Temperature ( $^{\circ}$ C)	-20 ~ +70
Storage Temperature ( $^{\circ}$ C)	-30 ~ +80
Lead Pin	Tin Plated Brass
Housing	PPO plastic resin (Color: Black)
Weight (Grams)	1.8
Condition by wave soldering ( $^{\circ}$ C)	260 $\pm$ 5 / within 5 sec
Condition by hand soldering ( $^{\circ}$ C)	350 $\pm$ 20 / within 5 sec
Options	For other options contact factory

**Dimensions:** (units: mm)**ROHS Compliant****Packaging:**

Parts are supplied in tube (40 per tube).