


Economy Power 2.5 TE Internal #: 1969589-3 Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

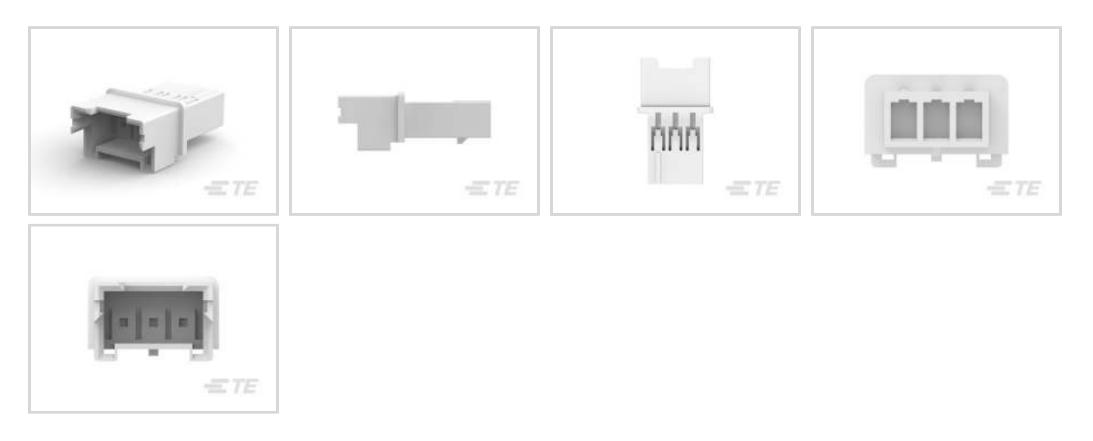

Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Wire Number of Positions: 3 Centerline (Pitch): 2.5 mm [.098 in]

Features



Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Natural
Contact Features	

Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Contact Type	Pin	
Contact Current Rating (Max)	7.5 A	
Termination Features		
Termination Method to Wire & Cable	Crimp	
Mechanical Attachment		
Strain Relief	Without	
Panel Mount Feature	Without	
PCB Mount Retention	Without	
Mating Retention Type	Latch	
Mating Retention	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Entry Configuration	Both Ends Closed	
Housing Material	Nylon - GF	
Centerline (Pitch)	2.5 mm[.098 in]	
Dimensions		
Connector Length	10 mm[.393 in]	

Connector Height	6.6 mm[.26 in]
Connector Width	18.17 mm[.715 in]
Compatible Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]
Wire Size	.13 – .33 mm²
Usage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Glow Wire Rating	Glow Wire
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	10000
Packaging Method	Bag
Other	

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Discrete Wire Connector Comment	Free Hanging
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5




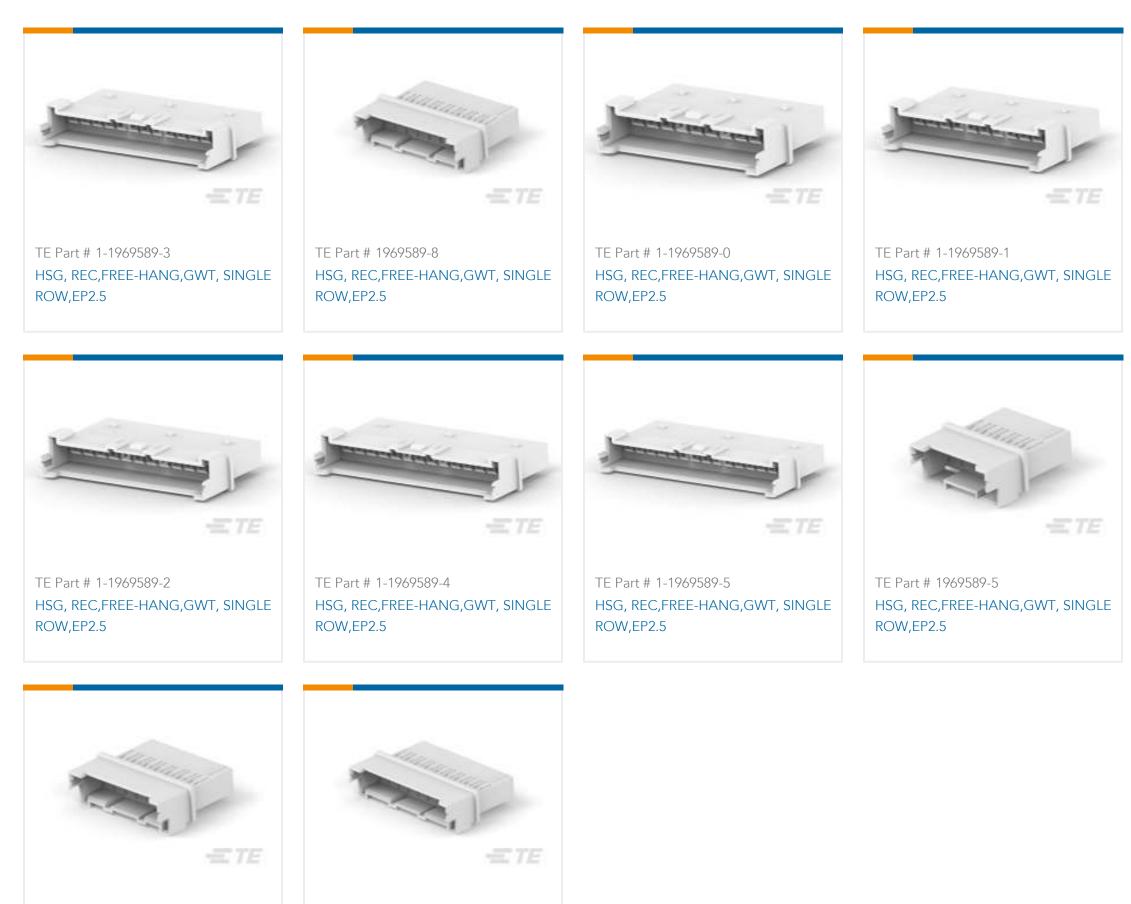

TE Part # 1969589-7 HSG, REC,FREE-HANG,GWT, SINGLE ROW,EP2.5 TE Part # 1969589-9 HSG, REC,FREE-HANG,GWT, SINGLE ROW,EP2.5

Also in the Series | Economy Power 2.5


		C. D. D. D. S.	
Insertion & Extraction Tools(1)	PCB Headers & Receptacles(494)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

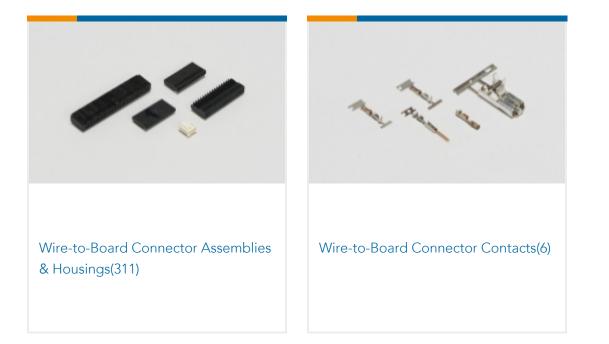

Customers Also Bought

Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



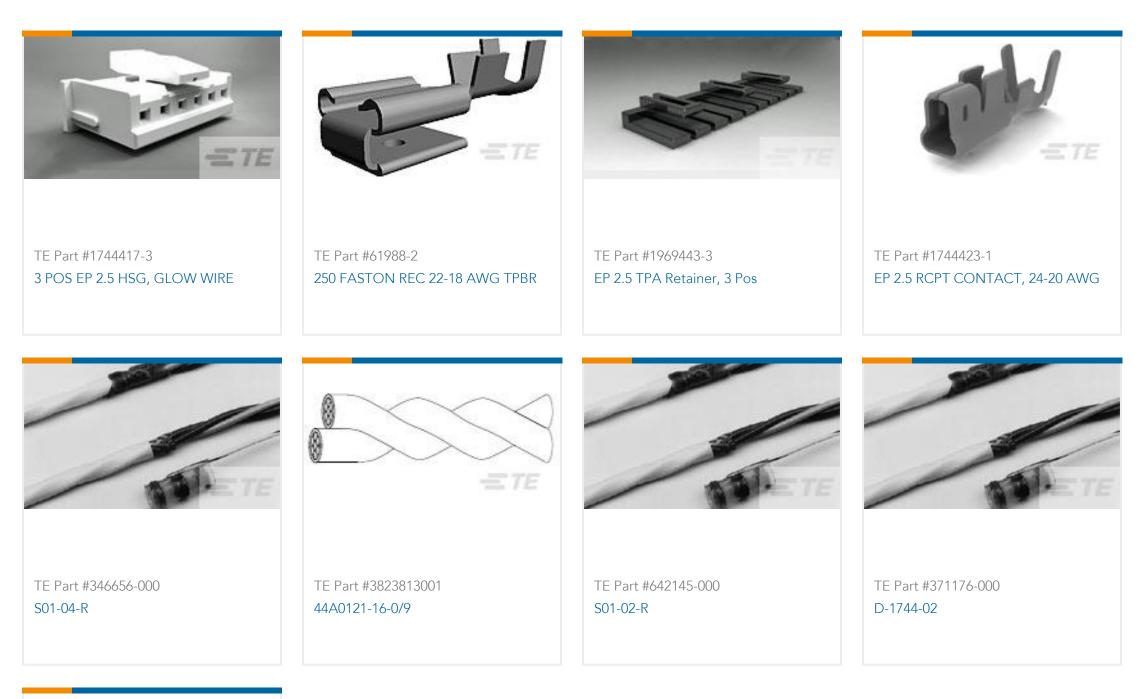



TE Part #1-1534073-3 MULTIFIT MK2 ASSY3P

Documents

Product Drawings HSG, REC, FREE-HANG, GWT, SINGLE ROW, EP2.5

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1969589-3_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1969589-3_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1969589-3_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

C For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Wire, 3 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Application Specification

English

Product Environmental Compliance

MD_1969589-3_03232018647_dmtec

English

MD_1969589-3_03232018647_dmtec

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals UL Report

English