

EM-23456-C36


SHT I.I

## NOTE:

I. INCREASED PRESSURE AT SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

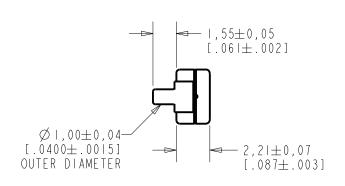

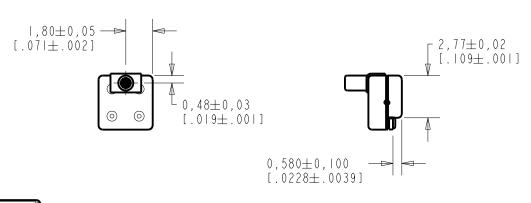

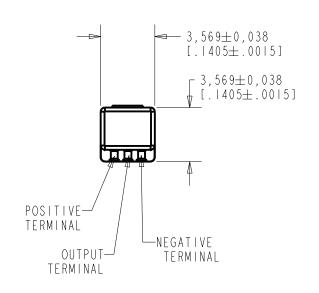




NOMINAL WEIGHT .08 GRAMS

DIMENSIONS IN MILLIMETERS [INCHES]

<b>KNOWLES ELECTRONICS</b>
ITASCA, ILLINOIS U.S.A.

Revision	C.O. #	Implementation Date	RELEASE LEVEL		REVISION
	MI0106036	5-22-15			
Н	M10105775	12-12-14	1 Active		
G	M10105775	- 8- 4	7.61170		'
SCALE:		4: I		DR. BY	DATE
			MMM	7 - 1 4 - 0 5	
DO NOT SCALE DRAWING			CK. BY	DATE	
TITLE:	MICI	ROPHONE	EM-23456-C36	GJP	7 - 15 - 05
			211 20 100 000	APP. BY	DATE
	OUTL	INE DRAWING	SHT I.I	GJP	7 - 15 - 05



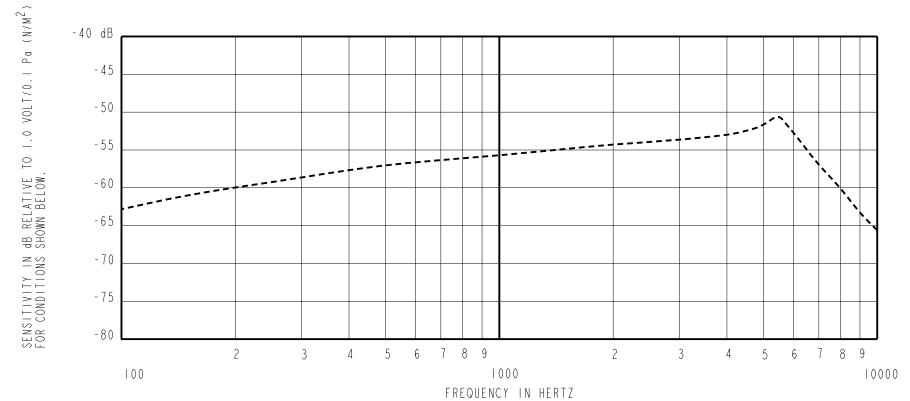

## <u>SENSITIVITY</u>

FREQUENCY	MIN.	NOM.	MAX.
00		-62.5	
000	- 5 9 . 0	-56.0	- 53.0
≈5400		-51.0	

## DEVICE CONFORMITY

RANGE OF	DEVIATION	FROM	IKHz
-10.0		- 3.0	
0.0		0.0	
+1.5		+7.5	

## NOTES:

- I. CASE CONNECTED TO NEGATIVE TERMINAL.
- 2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.
- 3. TYPICAL SENSITIVITY TO HUMIDITY AT 1000Hz IS 0.03 dB/%RH
- 4. SENSITIVITY AND NOISE VALUES INDICATED ON THIS SPECIFICATION ARE VALID AT 50% HUMIDITY.
- 5. TYPICAL FEEDTHROUGH ATTENUATION: 70 dB SPL (I kHz PRODUCED BY 10 mV RMS VARIATION OF BATTERY VOLTAGE).

PORT	DC	AMPLIFIER	FIER SENSITIVITY CHANGE "A" WEIGHTED NOI		OUTPUT	T IMPEDANCE OHMS	
LOCATION	SUPPLY	CURRENT DRAIN	TO 0.9VDC	(I KHz EQUIV. SPL)	MIN.	NOM.	MAX.
12KP	1.3V	50 μA MAX.	3 dB MAX.	28.0 dB MAX.	2800	4400	6800

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
1	M10106036	5-22-15		
Н	MI0105775	12-12-14	Active	
G	MI0105775	-   8 -   4	114 1 1 4	

KNOWLES ELECTRONICS ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION DR. BY CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR MMM

CK BY

MICROPHONE

PERFORMANCE SPECIFICATION

	IAI IAI IAI	1-14-03
	CK. BY	DATE
EM-23456-C36	GJP	7-15-05
20-30 000	APP. BY	DATE
SHT 2 I	GIP	7 - 15 - 05

DATE