



top hat  
SURFACE MOUNT  
RF Transformer

TC2-1TX+

50Ω 3 to 300 MHz

FEATURES

- Good return loss
- Excellent amplitude unbalance (0.5 dB typ) and phase unbalance (4 deg. typ) in 1 dB bandwidth
- Plastic base with leads
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: AT1521

+RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

APPLICATIONS

- Impedance matching
- Balanced to unbalanced transformation
- Push-pull amplifier

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (primary/secondary)			2		
Frequency Range		3		300	MHz
Insertion Loss*	—		3		dB
	—		2		
	3-300		1		
Amplitude Unbalance	3-300		0.5		dB
Phase Unbalance	3-300		4		Degree


\* Insertion Loss is referenced to mid-band loss, 0.4 dB typ.

MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA

Permanent damage may occur if any of these limits are exceeded.

CONFIG. A

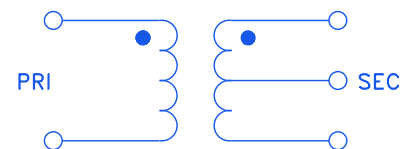

REV. B  
ECO-014884  
TC2-1TX+  
ED-6119  
MCL NY  
220829





top hat  
SURFACE MOUNT  
**RF Transformer**

**TC2-1TX+**

Mini-Circuits


50Ω 3 to 300 MHz

**PIN CONNECTIONS**

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
SECONDARY CT	2


**OPTIONAL PRODUCT MARKING:** CA or CE

**OUTLINE DRAWING**

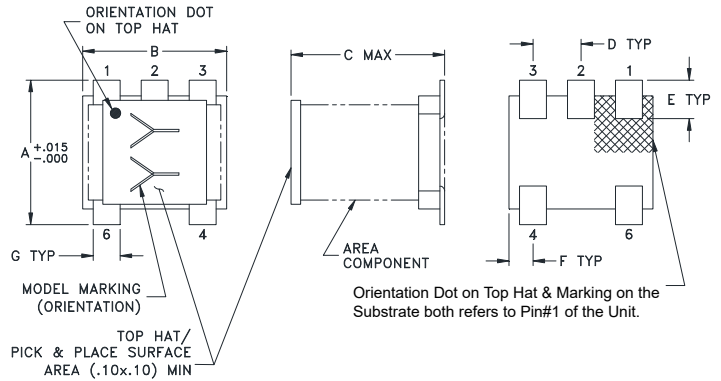

Top-hat total thickness: .013 inches MAX.

**PCB Land Pattern**



Suggested Layout,  
Tolerance to be within ±.002

**OUTLINE DIMENSIONS (Inch mm)**

A	B	C	D	E	F	G	H	J	K
.150	.150	.160	.050	.040	.025	.028	.065	.190	.030
3.81	3.81	4.06	1.27	1.02	0.64	0.71	1.65	4.83	0.76

Weight: 0.15 grams

**TAPE & REEL INFORMATION: F17**




top hat  
SURFACE MOUNT  
RF Transformer

TC2-1TX+

50Ω 3 to 300 MHz

TYPICAL PERFORMANCE DATA

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
3.00	0.38	21.63	0.05	0.54
5.00	0.33	20.24	0.04	0.57
10.00	0.34	19.32	0.02	0.45
50.00	0.37	19.41	0.03	0.56
70.00	0.40	19.34	0.04	0.64
100.00	0.44	19.00	0.07	0.86
150.00	0.52	18.11	0.14	1.30
200.00	0.60	17.06	0.25	1.68
300.00	0.80	15.00	0.53	2.44

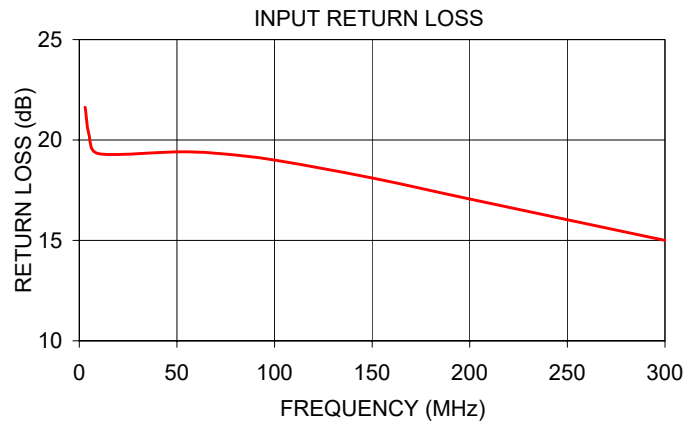

- NOTES
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

