



1	2	3	4	5	6	7	8
Product NO.	Dim "L1"	Connector "A" and "B"	Over mold "A" and "B"	SATA Cable	Solder		
10115007-7SR375HLF	375±10	SATA 7P Receptacle connector Straight type Housing, Back Cover: Heat resistant resin, Halogen Free, UL94V-0, Color Black Contact: Copper Alloy Contact Area: Gold plating over Ni plating	Heat resistant resin, Halogen Free, UL94V-0, Color Black	80°C 30V AWG30 Halogen Free, VW-1, with F mark, Color Black	Sn96.5-Ag3.0-Cu0.5 Lead Free		

NOTE)
 1) This product is based on Serial ATA Revision 2.6.
 2) This product is manufactured by soldering process.
 3) About the other Dim "L1" length, please inquire to sales person in our company.
 4) Product SPEC: GS-12-672
 5) Package SPEC: GS-14-1056
 6) Application SPEC: GS-20-138
 7) P/N composition

10115007 - 7 S R XXX H L F
 Lead Free
 Halogen Free
 Cable Length: Dim "L1"
 (150 - 150±10mm)
 (285 - 285±10mm)
 SATA Connector Type
 (S: Straight, R: R/A)
 SATA Connector Type
 (S: Straight, R: R/A)
 SATA Connector Position

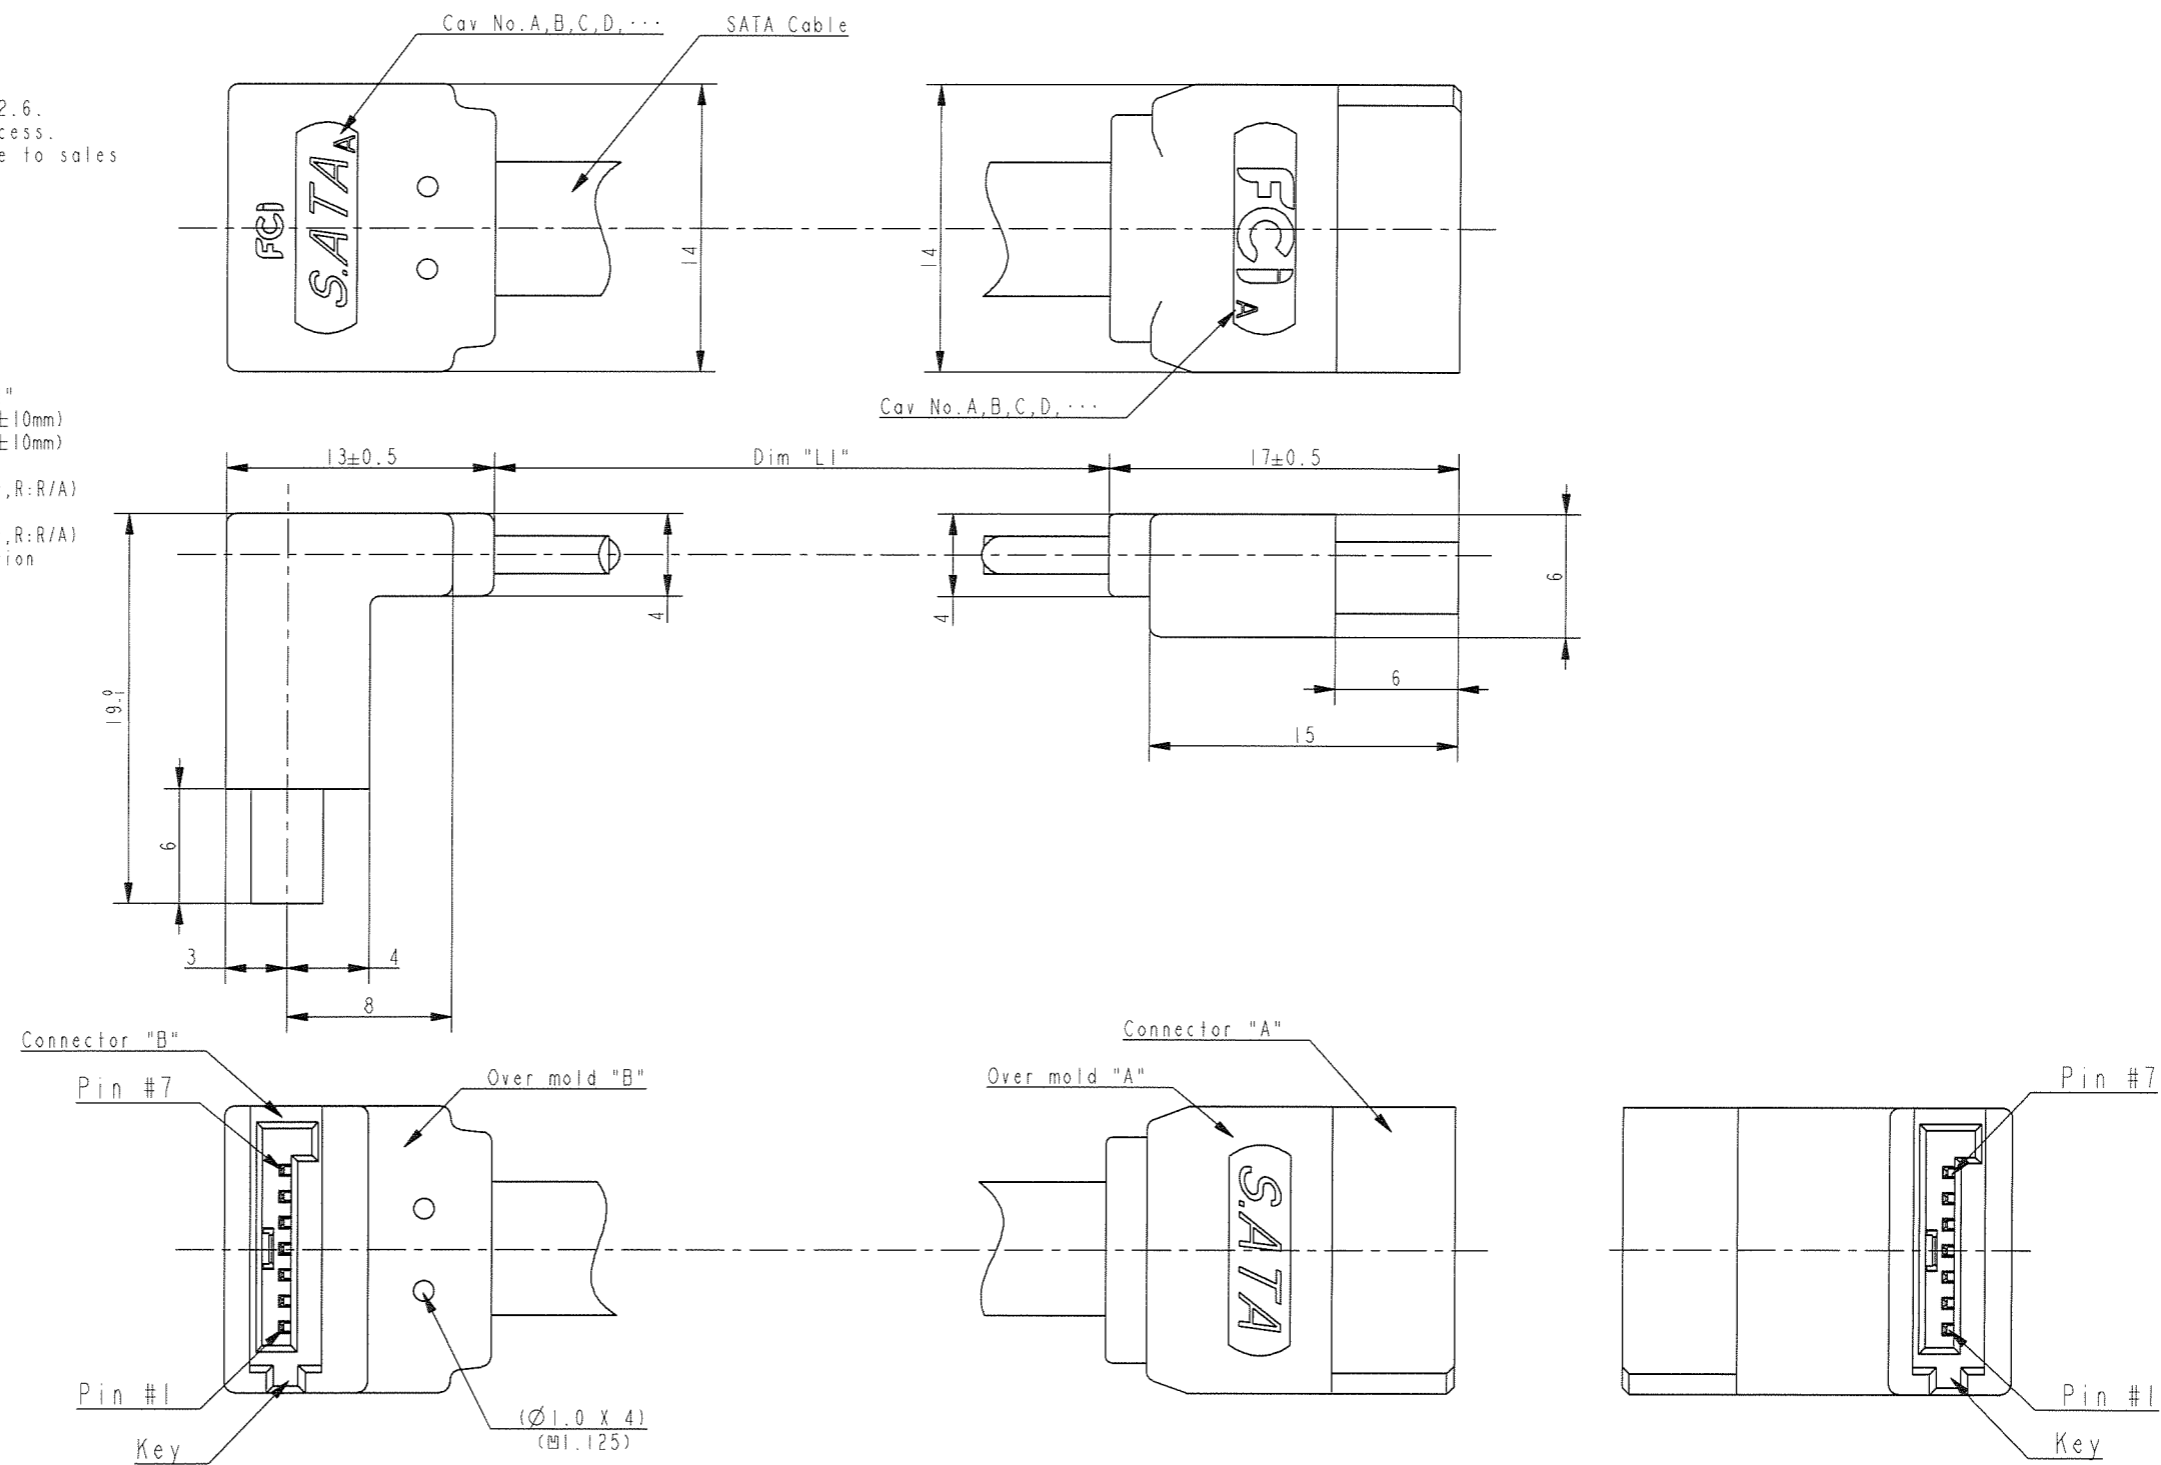

Wiring Table:
Pin Assignment

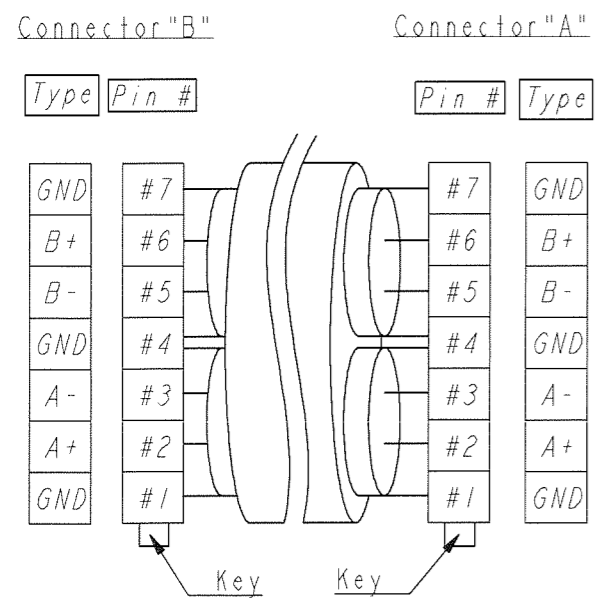

www.fciconnect.com		surface	tolerance std	projection	MM
		ISO 1302	ISO 406 ISO 1101	⊕	←→
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	T. Ishishita	2010-10-14	ANGULAR	0.X	±0.4
Eng	T. Ishishita	2010-10-14	LINEAR	0.XX	±0.4
Chr	X. Yamada	2010-10-14	0°	0.XXX	±0.4
Appr	M. Mori	2010-10-14	Product family		233F
FCJ		SATA 7P Single Cable Harness		spec no	10115007
		RightAngle High/Straight Lowpro		Rev.	A
catalog no		CUSTOMER		sheet 1 of 1	

Copyright FCJ