

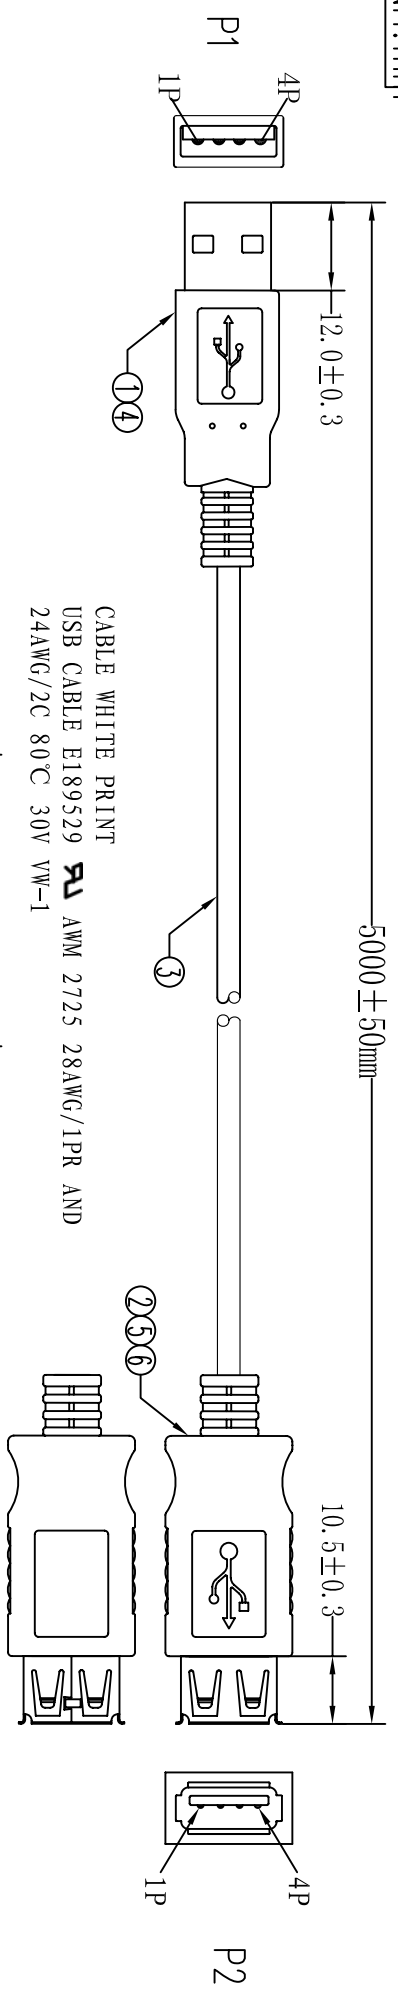


UNIT: mm

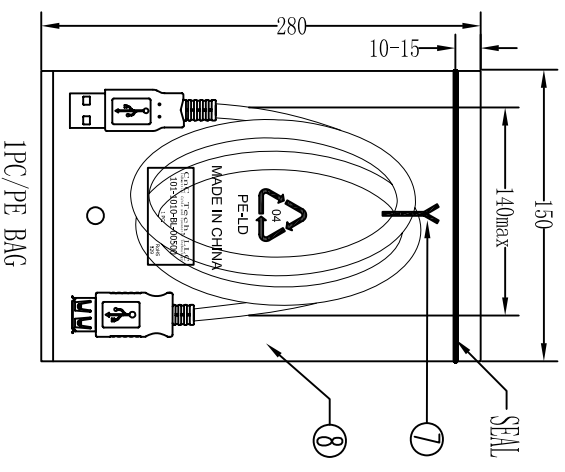

CABLE WHITE PRINT
 USB CABLE E189529
 24AWG/2C 80°C 30V VW-1
 AWM 2725 28AWG/1PR AND

PIN ASSIGNMENT:

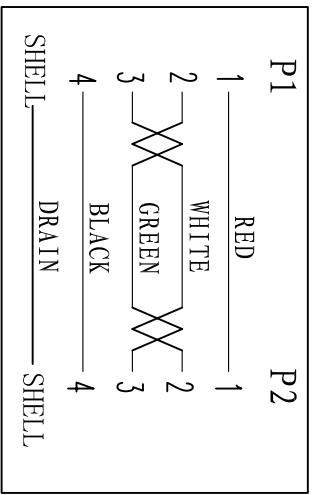

Electrical test:

1. 100% short, open, miswire test
2. Conduct resistance: 3 Ohm(max)
3. Insulation resistance: 20Mohm(min)
4. dielectric test: DC 300V

⑨	PE BAG	1/5	CLEAR SIZE: 360*380*40.05mm PRINT BLACK "MADE IN CHINA" + "5PCS".
⑧	PE BAG	1	CLEAR SIZE: 150*280*40.05mm PRINT BLACK "MADE IN CHINA".
⑦	TIE	1	BLACK L=120mm
⑥	IN JACKET	3g	CLEAR LDPE (MOULD NO: NM-027)
⑤	OUT JACKET	7g	BLACK PVC-40P (MOULD NO: WM-83)
④	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-40)
③	CABLE	1	BLACK USB1. 1 U12725 28#/1P+24#/2C+AEB OD: 4.7mm L=5000 ± 20mm
②	CONN	1	USB A FEMALE SHELL: NICKEL PIN G/F SHORT TYPE INSULATOR COLOR: WHITE
①	CONN	1set	USB A MALE SHELL: NICKEL PIN G/F 3PCS TYPE INSULATOR COLOR: WHITE
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1010-BL-00500
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	

A

B

C

D

A

B

C

D

4

3

2

1