

т	ם	п –	п	0



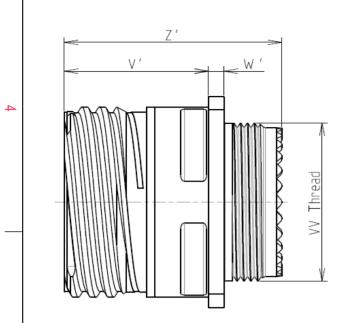



LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

PLATING : M = Nickel

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +200°C			

: 2000 hours

8D 0

G

11

Μ

01

н

F

Е


Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	20.62
R2	18.26
S	26.2±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Ζ'	32 Max
/V THREAD	M15x1-6g


ORIENTATION : E

CONTACT TYPE : PIN (1500 Matings)

Е

CONTACT LAYOUT : 11-01



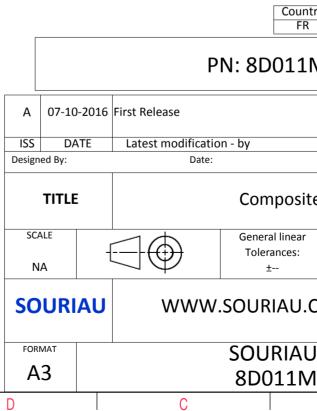

σ		A		_	
				4	
AS EXAMPLE				3	
any non-conformit which does not co of the Parties or b ndation, technical n	mply with by a third party				
1M01HE	Not Listed			2	
	CUSTOMER	DRAWING	MOD N°		
ite Receptacle 8D series					
ar	NPRDS / PROJECT 859				
.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
	1		SHEET		
M01HE-C		A	1/2	J	
-					

		G	ار (m		0
		Contact Layout				Panel Cutout
4		01			Â	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
		1#12 11-01]		¥ ∞ –	
ىن	Ctc A	X Y 0 0				Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
22						(professional recommendati Country FR PN: 8D011N
					A 07-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
-					TITLE SCALE NA	General linear Tolerances:
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011M0
	Н	G	F	E	D	C

