







SIGN	DATE	DESCRIPTION	APPROVER
△	2012.11.12	Updated agency approval data	Janny
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material**
- Terminal body (metal housing): Brass(CuZn)
 - Terminal screw: Steel Zinc plating "-" slot type
 - Wire guard: PhBz , Tin plated
 - Insulator (housing): Thermoplastic (UL94V-0)


- Electrical cULus / VDE / TUV**
- Voltage rating: 300V/300V/300V
 - Current rating: 20A/20A/20A
 - Wire range: 2.5mm²/ 0.34-2.5mm²
 - Solid wire(AWG): 12-24
 - Stranded wire(AWG): 12-24
 - Torque: 5Lb-In/0.5N.m/0.56N.m
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV/2.5KV/2.5KV
 - Operating temperature: -30°C to +105°C
 - Safety Approval:   

Use with OST0Q 1.0x1.0mm square pin. Withdrawal force: 200-500gf/pole

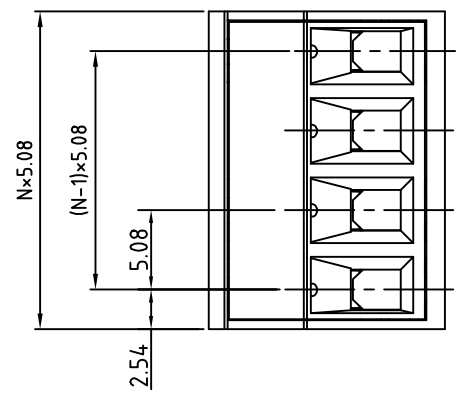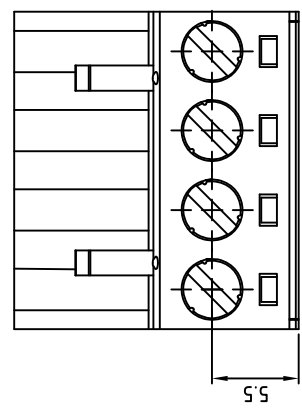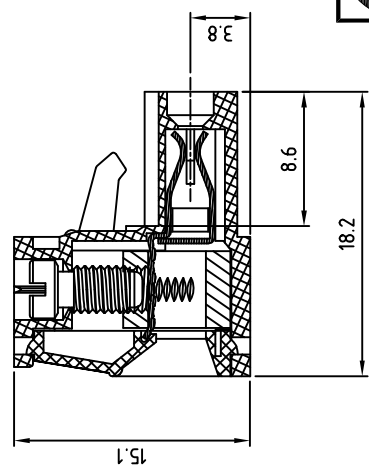

N=Number of poles

- PART NUMBER:**
OSTTJXX5153
- No. of Poles**
02 2 Poles
03 3 Poles
...
24 24 Poles
- COLOR**
0: Black
5: Green (Standard)
6: Blue
8: Grey

OST ON-SHORE TECHNOLOGY, INC.	
OSTTJ - 5.08mm Series	
TITLE	OSTTJ - 5.08mm Series
PART NO.	OSTTJXX5153
DWG NO.	OSTTJXX5153.DWG
APPROVED	Shi Jun 2006.10.23
CHECKED	Marvin 2006.10.23
DESIGNED	Marvin 2006.10.23
DRAWN	Marvin 2006.10.23
CUST NO.	
UNIT:	mm
SCALE:	NONE
SHEET:	01/01
REV.:	E
Tolerance	X. ±0.50 X.X ±0.30 X.XX ±0.10 X.X° ±1°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.