
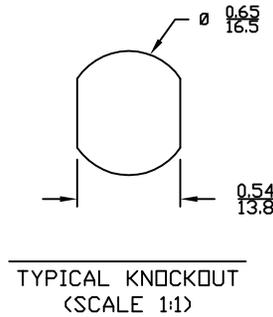


SAP P/N#	ENGINEERING NO.
1201095001	ERWAAU3000C050

AUX VIEW  
SCALE 3:4

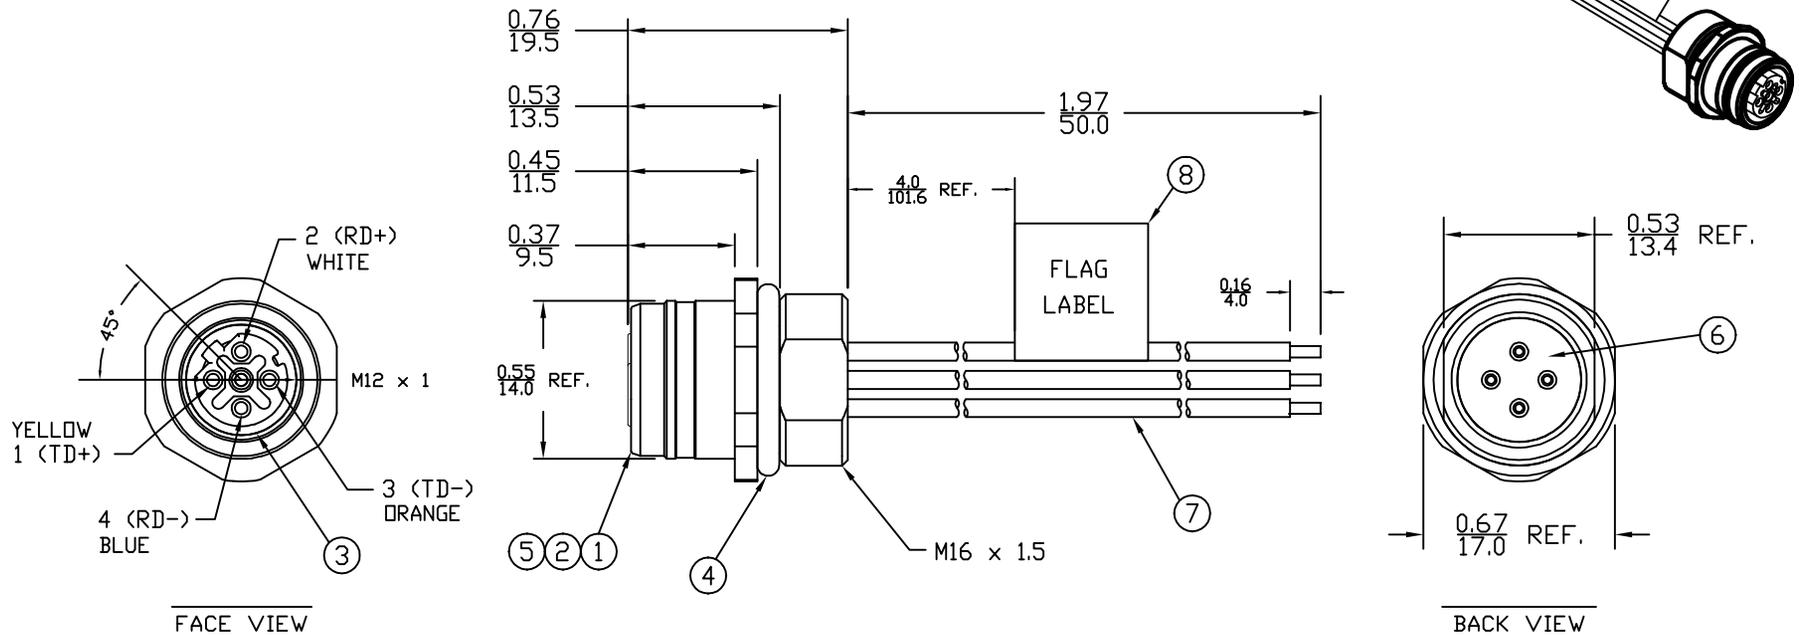

- NOTES:
- 1) MATERIAL: SEE TABLE
  - 2) FINISHES: SEE TABLE
  - 3) WIRE: #22-1 PVC, UL1061
  - 4) ELECTRICAL DATA:  
MAX. VOLTAGE: 125V  
MAX. CURRENT: 1.5A
  - 5) ENVIRONMENTAL:  
PROTECTION IP67  
TEMPERATURE RANGE: -10°C TO 80°C
  - 6) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	4	WIRE	PVC	-
6	1	EPOXY	-	BLACK
5	4	SOCKET CONTACT	COPPER ALLDY	NICKEL
4	1	D-RING	NITRILE	BLACK
3	1	D-RING	VITON	RED
2	1	INSERT: D-CODE	PUR	BLACK
1	1	SHELL: FRONT PANEL MOUNT	BRASS	NICKEL

SD RELEASE EC NO: MEL2010-0043 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/08/21	QUALITY SYMBOLS $\nabla=0$ $\nabla C=0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
			mm	INCH	INCH/MM	INCH		
		4 PLACES	±----	±----	VOU	2009/08/14		TITLE
		3 PLACES	±----	±.005	DATE	DATE		M12 U-LOCK RECPT FPM M16 4P FEMALE D-CODE #22-1 PVC WIRES
	2 PLACES	±----	±.010	BWOODMAN	2009/08/31			
	1 PLACE	±----	±.020	APPROVED BY	DATE			
ANGULAR ±1°				MATERIAL NO.		DOCUMENT NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART		MOLEX INCORPORATED		
SIZE A				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				