


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR  
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY  
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 20715, EM	04/11/11	HM

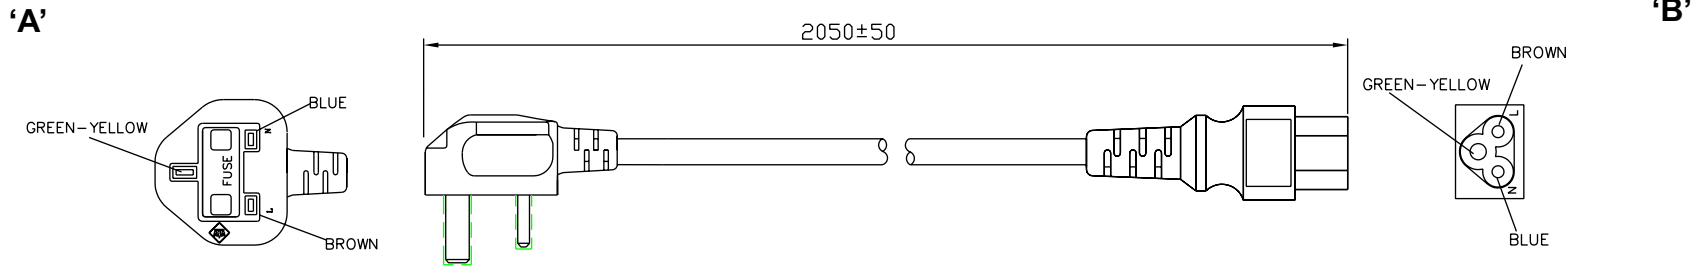

**GENERAL SPECIFICATIONS:**


- RATING: 2.5A / 250V AC
- CABLE TYPE / SIZE: HO5VV-F, 0.75 mm<sup>2</sup>, 3 CONDUCTOR
- TEMPERATURE RATING: 70° C
- CABLE JACKET COLOR: PMS 11C, COOL GRAY
- CONDUCTORS COLOR: BLUE/ BRN/GRN-YEL
- OVERALL LENGTH (L): 2050 ± 50 mm
- CABLE OUTER DIAMETER: 6.7 ± 0.2 mm
- END 'A': BS1363 (FUSE 3A), COLOR PMS 11C, COOL GRAY
- END 'B': IEC 320 / C5, COLOR PMS 11C, COOL GRAY
- APPROVALS PLUG: BSI
- APPROVALS CABLE: BSI
- APPROVALS CONNECTOR: BSI

**PACKING:**  
 HANKING  
 L = 200 ± 10 mm

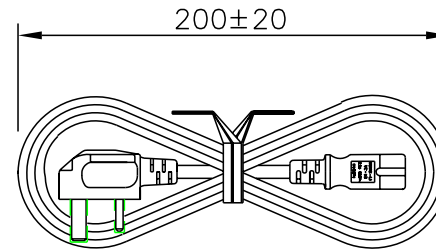

**NOTES:**

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS AND / OR FILE NUMBERS.



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
		<b>TOLERANCES:</b> DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: EM	DATE: 04/11/11	DWG TITLE: BRITISH DETACHABLE CORDSET		
DRAWN: NF	DATE: 04/11/11	FSCN No.: G, CC	SIZE: A	REV. A
APRVD: HM	DATE: 04/11/11	SCALE: NONE	PART NO: <b>6104262M0712T-GGY(R)</b>	SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice