

COIL: @ +25° C

RESISTANCE 160 Ω ±10%

NOMINAL VOLTAGE 12.0 VDC

MUST OPERATE 6.4 VDC

MUST RELEASE .7 VDC

ENVIRONMENT:


VIBRATION 10 CPS TO 2000 CPS AT 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

CUSTOMER DATA SHEET

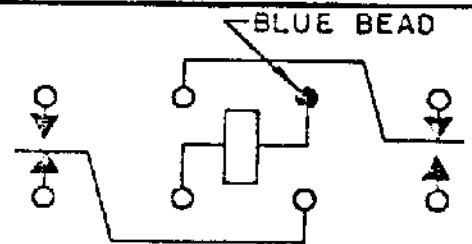

CONTACT RATING: Low level to 4A @ 28 VDC 100,000 Operation

DR. 4-26-82

CK. OSW



Communications Instruments, Inc.

CUST. CII STANDARD

CUST. NO. \_\_\_\_\_

TYPE HFW RELAY

HF4A1201G00