



Electrical specifications

Center Frequency: 825-835 MHz
Insertion Loss: 2.6 dB
Rejection 1: >40dB@822.5 MHz
Rejection 2: >40dB@837.5 MHz
Rejection 3: >65dB@815 MHz
Rejection 4: >65dB@845 MHz
Rejection 5: >85dB@790 MHz
Rejection 6: >85dB@870 MHz
Ripple: 1.2 dB
VSWR: 1.25


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA Female
Dimensions: 164 X 68 X 60 mm

Environmental

Operating Temperature: -45 to +85° C
Storage Temperature: -55 to +95° C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

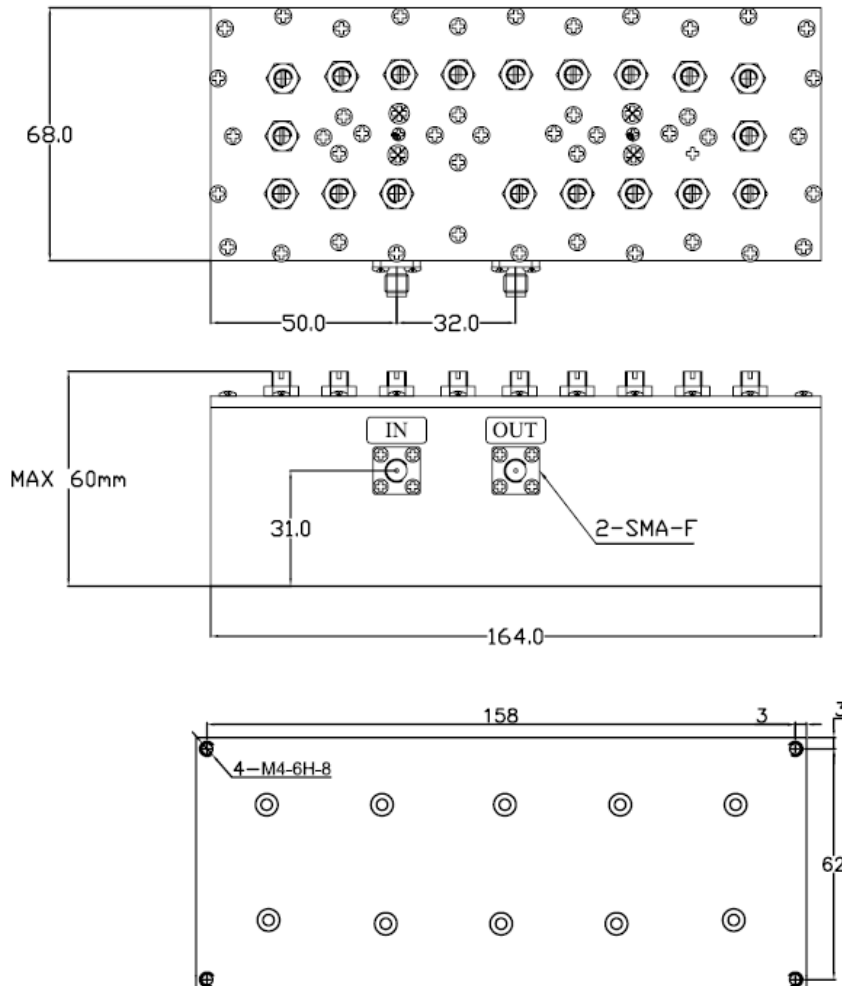



Plot:

