

AVRGT 1

2


3

4

5

6

NO.	MOULD NO.	REMARK
1		THE FIRST RELEASE
		8-15-2015

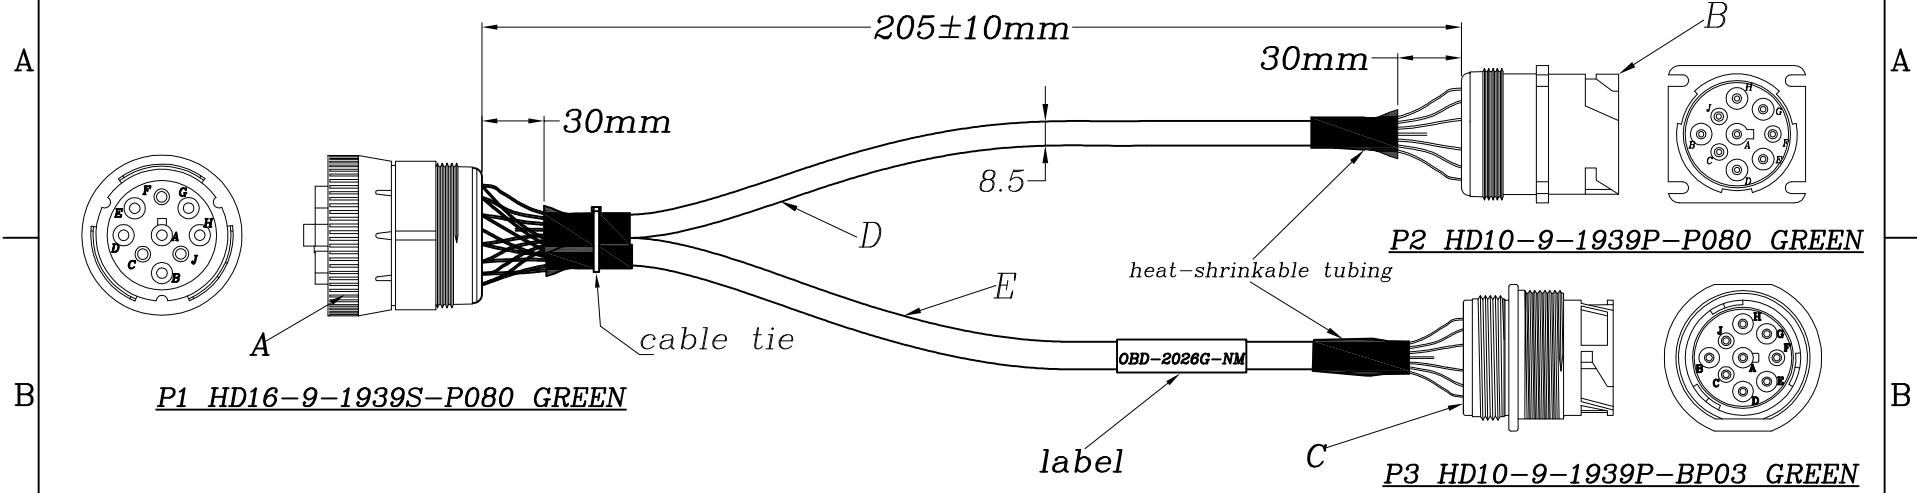

**PIN ASSIGNMENT**

P1	P2	P3
A ————— A	————— A	————— A
B ————— B	————— B	————— B
C ———— C	————— C	————— C
D ———— D	————— D	————— D
E ————— E	————— E	————— E
F ———— F	————— F	————— F
G ———— G	————— G	————— G
H ————— H	————— H	————— H
J ————— J	————— J	————— J

**TESTING**

- 1.Any Open,Short Miswiring & Intermittent are not permitted.
- 2.Contact Resistance:1Ω.
- 3.Insulation Resistance:5MΩ/300V DC MIN.
- 4.This product is ROHS compliant.

E	CABLE:OD 8.5 9C/AWG20+AL BLACK	305	MM
D	CABLE:OD 8.5 9C/AWG20+AL BLACK	305	MM
C	DETUSCH:HD10-9-1939P-BP03 GREEN CONNECTOR	1	SET
B	DETUSCH:HD10-9-1939P-P080 GREEN CONNECTOR	1	SET
A	DETUSCH:HD16-9-1939S-P080 GREEN CONNECTOR	1	SET
ITEM	BILL OF MATERIAL /SPECIFICATION	QTY	UNIT

Note Sister Cables:  
OBD-2026  
OBD-2026-NM

QUALITY SYMBOLS	150042-OBD-2026G-NM	
	295-DGT-1000883	
	PRODUCT NAME	DWG NO.
	J1939 9Pin Female to Male*2 Cable	869-097
	DATE:2017/12/27	PART NO.
	Andy	5-13-22
	DRAWN BY	UNIT: MM SHEET: 1/1
	APPROVED BY	SIZE: A4 SCALE:1:1 VER: A/0
		THIRD ANGLE PROJECTION

1

2

3

4

5

6

AVRGT