




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN05/19	L.CHAN

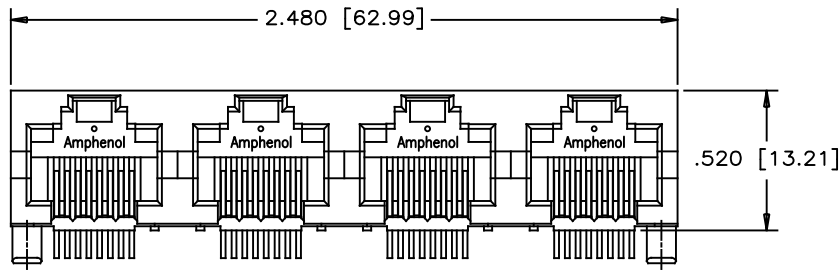


FRONT VIEW

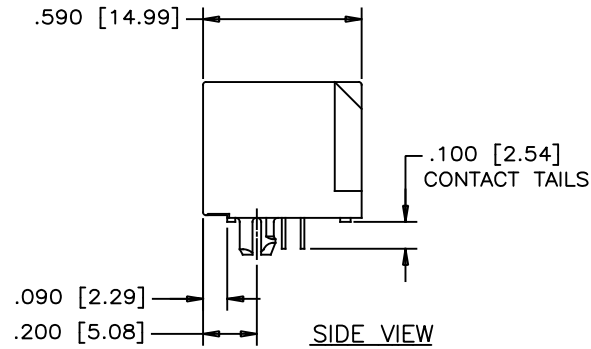

SIDE VIEW

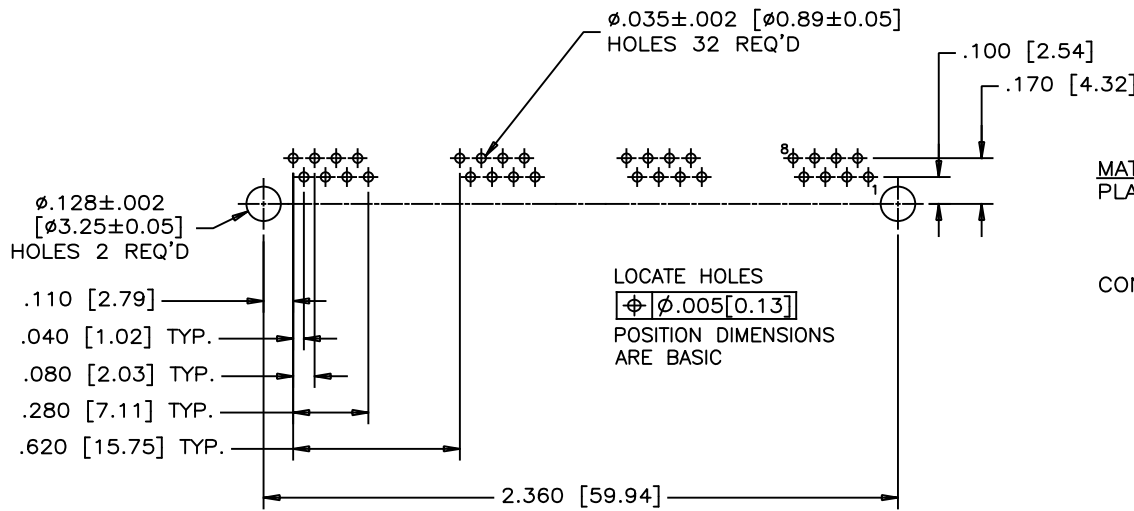

RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

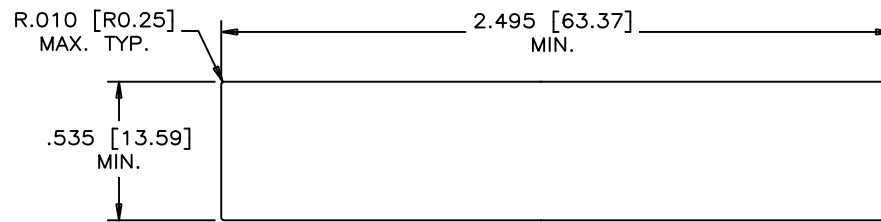

RECOMMENDED PANEL CUTOUT

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0,
COLOR BLACK

CONTACTS:

PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING SURFACE.
[SEE PART NUMBER FOR THICKNESS]
50 μ " [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ " [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260°C MAXIMUM FOR
5 SEC MAXIMUM.

PART NUMBER: RJHSE-X080-04

GOLD PLATING

- E=RJ45 FLAT CONTACT 6 μ "
- G=RJ45 FLAT CONTACT 15 μ "
- J=RJ45 FLAT CONTACT 30 μ "
- 5=RJ45 FLAT CONTACT 50 μ "

UNLESS SPECIFIED OTHERWISE		DRAWN <i>W.QIU</i>	DATE <i>JUN05/19</i>	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS INCH	CHECKED <i>L.CHAN</i>		DATE <i>JUN05/19</i>	
SECONDARY MILLIMETER	M.E. APP'D			TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D			4 PORT, HIGH SPEED, MODULAR JACK, 8 POSITION, 8 CONTACTS, W/O SHIELD, W/O LED - RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.			DWG. NO.
1 DECIMAL PLACE ± 0.025	ENG. REL. NO.			P-RJHSE-X080-04
2 DECIMAL PLACES ± 0.020	REF.			REV
3 DECIMAL PLACES ± 0.015	THIRD ANGLE PROJECTION			A
ANGULAR DEGREES $\pm 1.0^\circ$	DO NOT SCALE DRAWING			CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1