6-1658012-2 ACTIVE

MICTOR

TE Internal #: 6-1658012-2


PCB Mount Receptacle, Vertical, Board-to-Board, 80 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount,

Power & Signal, Black

View on TE.com >



Connectors > PCB Connectors > PCB Headers & Receptacles

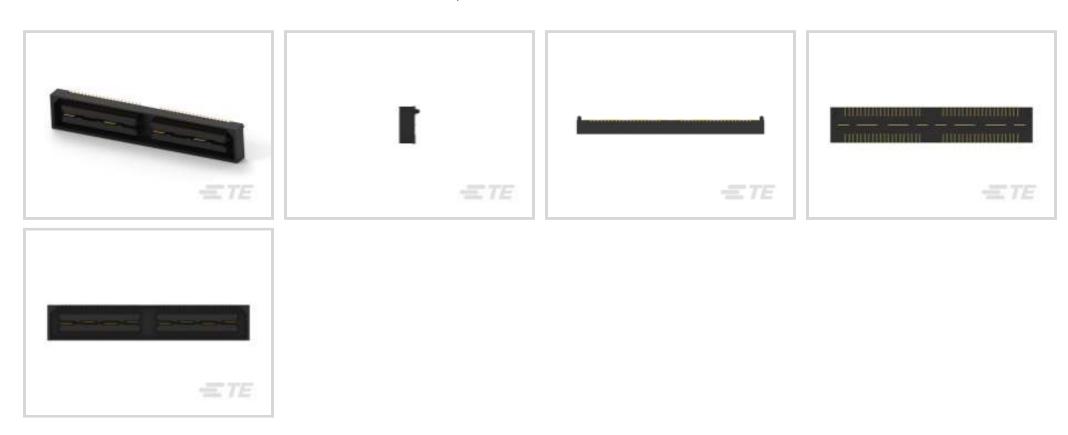

PCB Connector Assembly Type: PCB Mount Receptacle

PCB Mount Orientation: Vertical Connector System: Board-to-Board

Number of Positions: 80

Centerline (Pitch): .8 mm [.031 in]

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	

Stackable	No
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	80
Board-to-Board Configuration	Parallel

Electrical Characteristics

Dielectric Withstanding Voltage (Max)	675 VAC
Insulation Resistance	2 ΜΩ



Impedance	100 Ω
Operating Voltage	125 VAC
Body Features	
Assembly Process Feature Material	Polyimide Film
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Thickness	.25 μm[9.8425 μin]
Mating Tab Width	.38 mm[.015 in]
Mating Tab Thickness	.2 mm[.008 in]
Contact Shape & Form	Single Beam
PCB Contact Termination Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.25 μm[9.8425 μin]
Contact Type	Socket
Contact Current Rating (Max)	1.25 A, 9.5 A
Termination Features	
Termination Features Rectangular Termination Post & Tail Thickness	.15 mm[.006 in]
	.15 mm[.006 in] 1.77 mm[.07 in]
Rectangular Termination Post & Tail Thickness	
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width	1.77 mm[.07 in]
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board	1.77 mm[.07 in]
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment	1.77 mm[.07 in] Surface Mount
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type	1.77 mm[.07 in] Surface Mount Locating Posts
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention	1.77 mm[.07 in] Surface Mount Locating Posts With
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment	1.77 mm[.07 in] Surface Mount Locating Posts With Without
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention	1.77 mm[.07 in] Surface Mount Locating Posts With Without With
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention PCB Mount Alignment	1.77 mm[.07 in] Surface Mount Locating Posts With Without With With
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention PCB Mount Alignment Connector Mounting Type	1.77 mm[.07 in] Surface Mount Locating Posts With Without With With
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention PCB Mount Alignment Connector Mounting Type Housing Features	1.77 mm[.07 in] Surface Mount Locating Posts With Without With With Board Mount
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention PCB Mount Alignment Connector Mounting Type Housing Features Centerline (Pitch)	1.77 mm[.07 in] Surface Mount Locating Posts With Without With With Board Mount .8 mm[.031 in]
Rectangular Termination Post & Tail Thickness Rectangular Termination Post & Tail Width Termination Method to Printed Circuit Board Mechanical Attachment PCB Mount Alignment Type Mating Retention Mating Alignment PCB Mount Retention PCB Mount Alignment Connector Mounting Type Housing Features Centerline (Pitch) Housing Material	1.77 mm[.07 in] Surface Mount Locating Posts With Without With With Board Mount .8 mm[.031 in]



Stack Height	5 mm, 8 mm, 11 mm, 16 mm, 19 mm, 22 mm, 25 mm, 30 mm[1.181 in]
PCB Thickness (Recommended)	.06 mm[.25 in]
Usage Conditions	
Operating Temperature Range	-65 – 125 °C[-85 – 257 °F]
Operation/Application	
Assembly Process Feature	Pick and Place Cover
Circuit Application	Power & Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	475
Packaging Type	Pocket Tape

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach





MSB0.80PL22ASY080FL,-,10,-TY









MSB0.80PL8ASY080FL,-,F,-TY









TE Part # 6-1658013-2


MSB0.80PL5ASY080FL,GP,10,-TR



MSB0.80PL16ASY080FL,GP,30,-TR



MSB0.80PL8ASY080FL,-,10,-TY









TE Part # 1658013-2 MSB0.80PL5ASY080FL,-,10,-TY

TE Part # 1658016-2 MSB0.80PL16ASY080FL,-,10,-TY

TE Part # 1658017-2 MSB0.80PL19ASY080FL,-,10,-TY

TE Part # 1658020-2 MSB0.80PL30ASY080FL,-,10,-TY PCB Mount Receptacle, Vertical, Board-to-Board, 80 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Power & Signal, Black





TE Part # 1658044-2 MSB0.80PL5ASY080FL,-,F,-TY



TE Part # 1658045-2 MSB0.80PL8ASY080FL,-,F,-TY




TE Part # 1658047-2 MSB0.80PL16ASY080FL,-,F,-TY



TE Part # 1658048-2 MSB0.80PL19ASY080FL,-,F,-TY

Customers Also Bought

















Documents

Product Drawings

MSB0.80RC-ASY080FL,GP,10,-TR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-1658012-2_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-1658012-2_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-1658012-2_P.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use

PCB Mount Receptacle, Vertical, Board-to-Board, 80 Position, .8 mm [.031 in] Centerline, Fully Shrouded, Gold, Surface Mount, Power & Signal, Black



Datasheets & Catalog Pages

MICTOR SB Interconnection System

English

MICTOR SB CONNECTORS

English

Product Specifications

Application Specification

English