


THE PART NUMBER:
101-00178-**

Pin Type	Interface Dim L	Pin No.
detect	3.50MM	25, 26
General	4.25MM	all other pins
power	5.00MM	1, 13, 38, 50

- 29:功能區鍍金10u",鍍鍍光亮鍍銀至少160u"
- 30:功能區鍍金3u",鍍鍍光亮鍍銀至少160u"
- 31:功能區鍍金5u",鍍鍍光亮鍍銀至少160u"
- 32:功能區鍍金10u",鍍鍍光亮鍍銀至少160u"
- 33:功能區鍍金15u",鍍鍍光亮鍍銀至少160u"
- 34:功能區鍍金30u",鍍鍍光亮鍍銀至少160u"
- 64:功能區鍍金1u",鍍鍍光亮鍍銀至少160u"
- 65:功能區鍍金3u",鍍鍍光亮鍍銀至少160u"
- 66:功能區鍍金5u",鍍鍍光亮鍍銀至少160u"
- 67:功能區鍍金10u",鍍鍍光亮鍍銀至少160u"
- 68:功能區鍍金15u",鍍鍍光亮鍍銀至少160u"
- 69:功能區鍍金30u",鍍鍍光亮鍍銀至少160u"

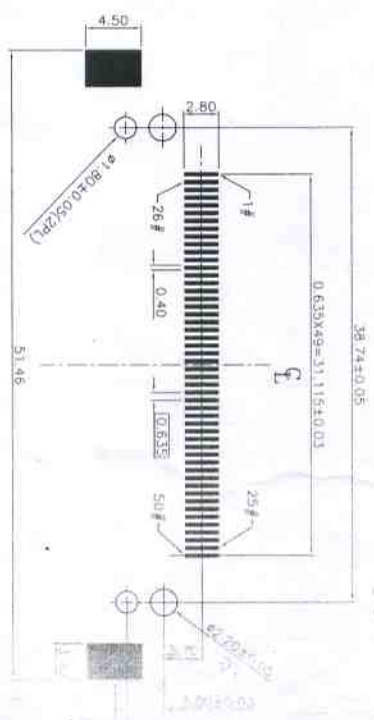

- Notes:
- 1.All Dimensions are in Millimeters.
 - 2.Operation voltage: 100 VAC max.
 - 3.Current rating : 1 Amps max.
 - 4.Contact resistance: 40m ohms max.
 5. Insulation resistance: 1000M ohms min 500 VDC
 - 6.Dielectric withstanding voltage: 500 VAC / 1minute
 - 7.Operating Temperature: -20°C to +60°C
 - 8.Storage Temperature: -40°C to +70°C
 - 9.Material see table.
 10. Total Mating Force : 28.8N (MAX) at 25 mm/minute
 - 11.Total Unmating Force: 4.9N (MAX) at 25 mm/minute
 - 12.Single Pin Retention Force: 9.8N(MIN) at 25 mm/minute

GENERAL TOLERANCE		FILE NO.	101-00178	PART NO.	101-00178-**	DRAWN	LOP	MATERIAL	SCALE	NO. SCALE	
X ±0.50	X ±.5°	REV.	A	TITLE	CF Conn.-32(13.75,排形,板L-Post38.74有接地片,本色)	CHECKED	hm/vw/19	DATE	04/13/2006	UNIT	mm
X ±0.38	X ±.2°	SIZE	A4	SHEET	1 OF 1	APPROVED	NBY/19	Shouh Min Industry (Shenzhen) CO., LTD			
XX ±0.25	XX ± 1°										

REV	EQN. NO.	MODIFY CONTENT	DATE
A	ESJ00004-038	改版	04/13/2006