



REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A1		Note 5 von Kunststoffspule auf Hartspule geaendert	14DEC2005	PNi JRY
A2		PCB verrutscht	07DEC2015	ST PNi
A3		ECR-20-010822	05MAY2020	KG KK

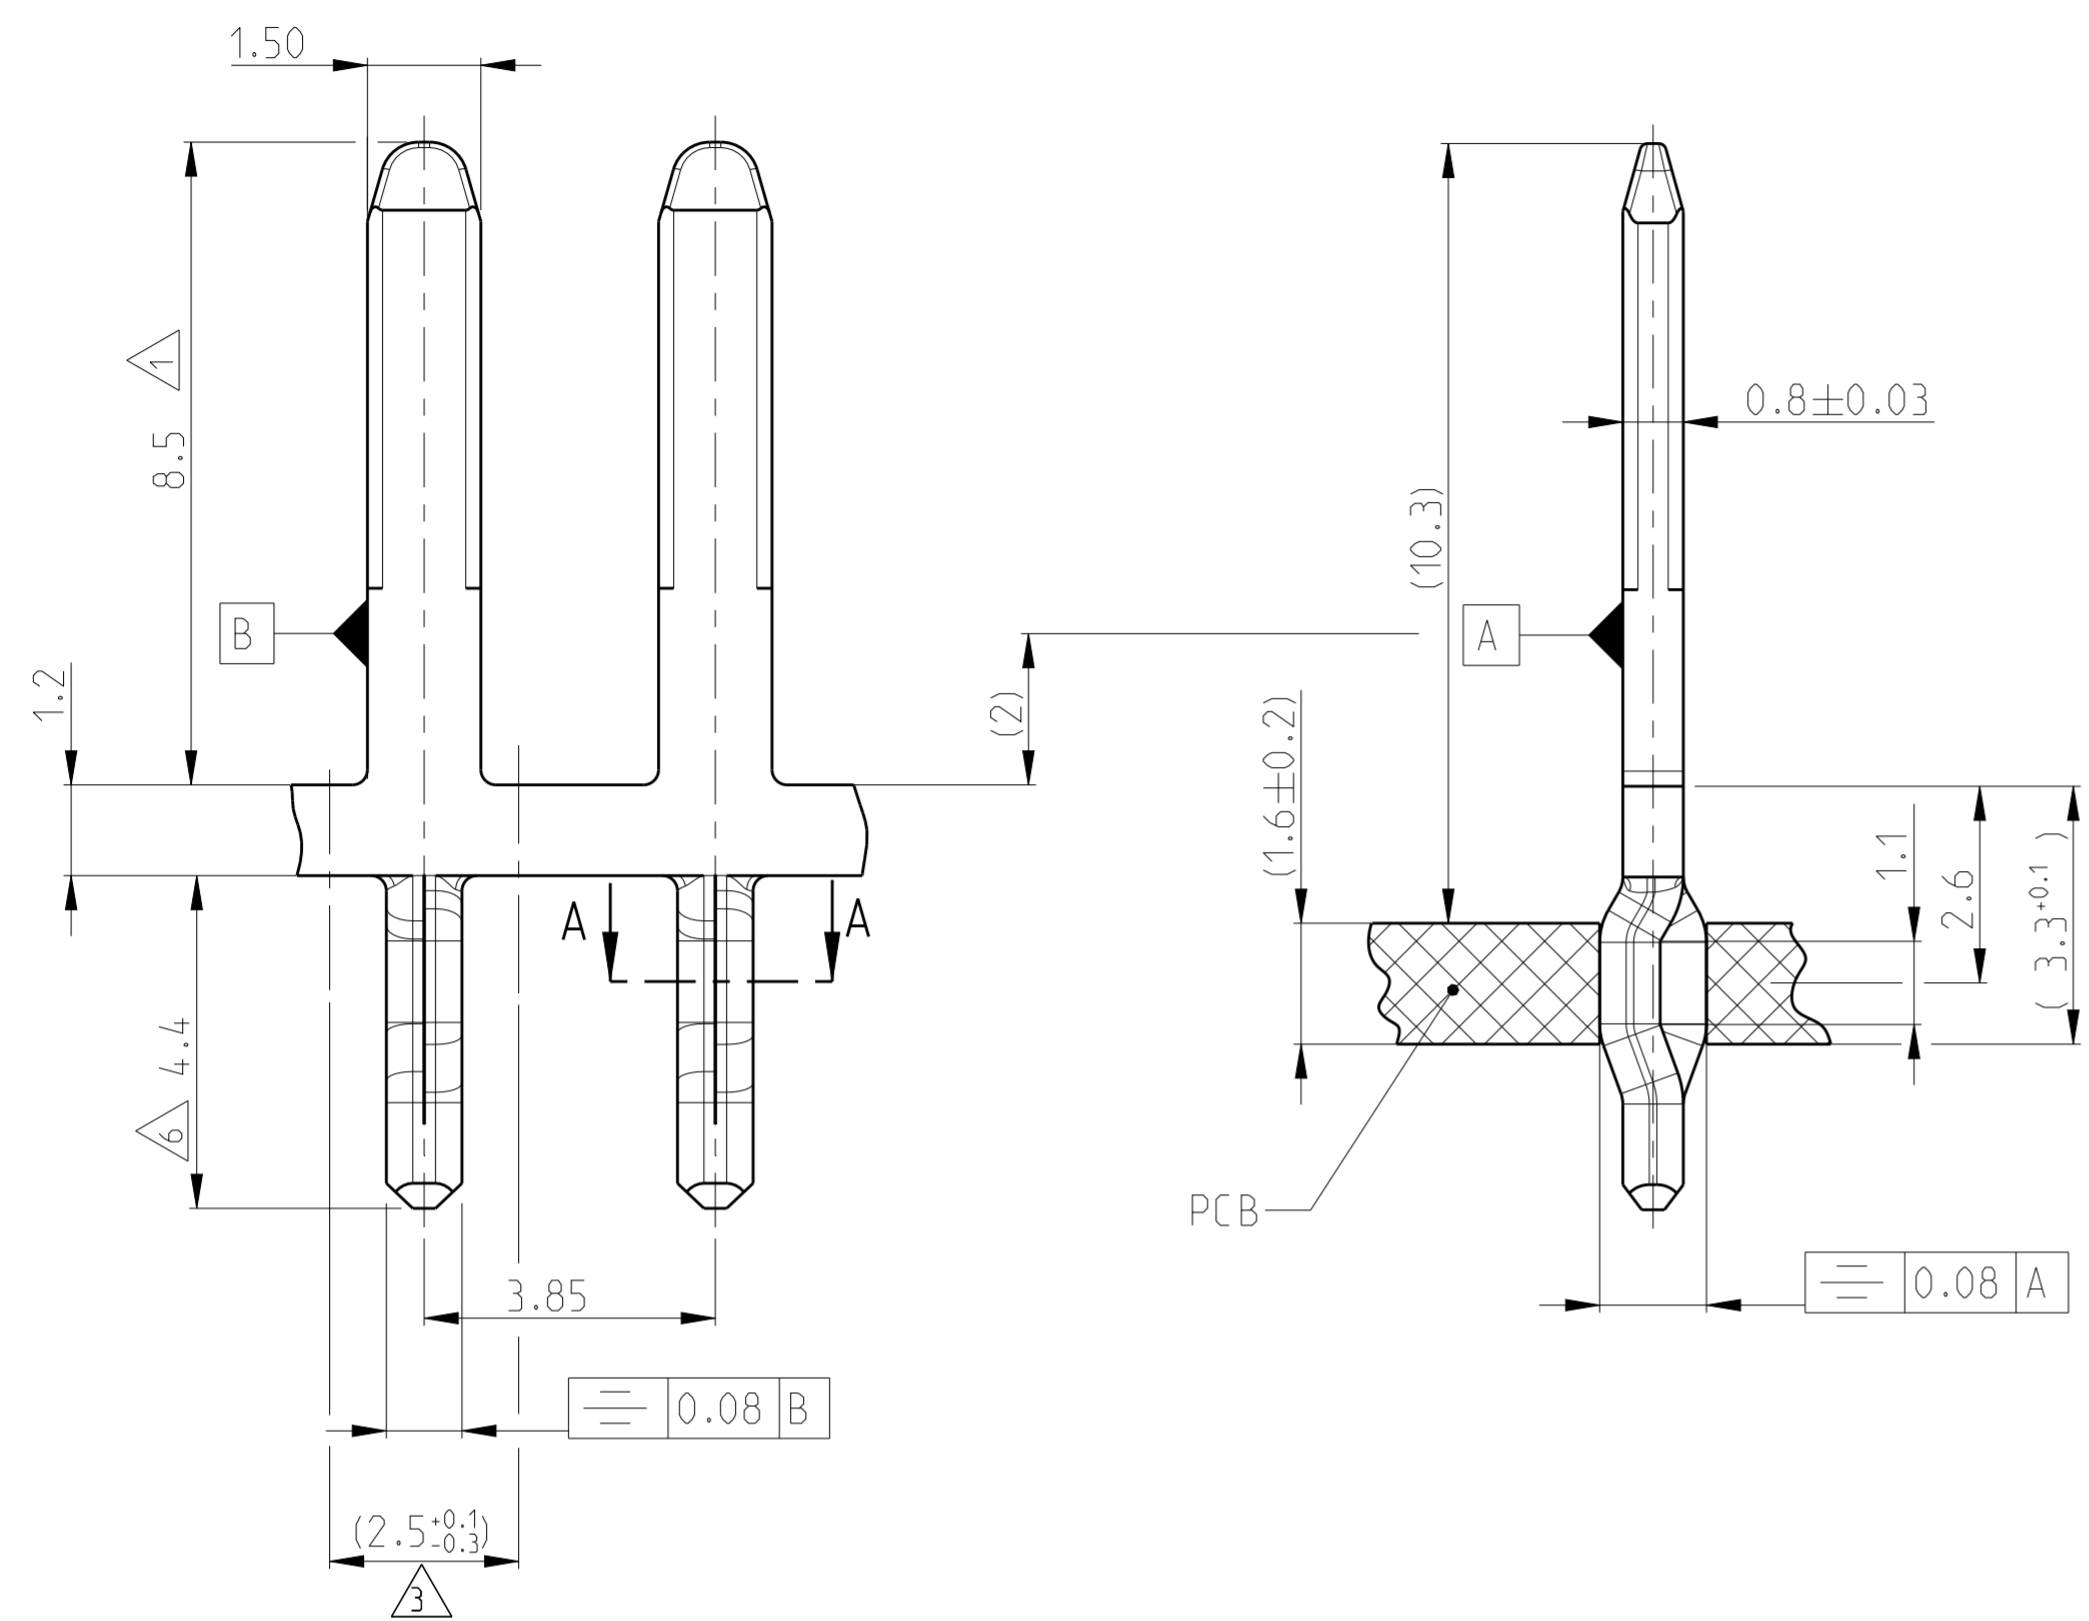

NOTES:  
 BEMERKUNGEN:

- 1 2 µm - 4 µm Sn OVER 1.2 µm - 2.7 µm Ni  
 2 µm - 4 µm Sn UEBER 1.2 µm - 2.7 µm Ni


2

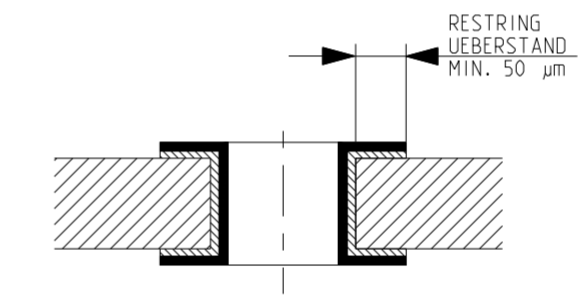


PLATED THROUGH HOLE SPECIFICATION SPEZIFIKATION FUER DURCHPLATIERTE BOHRUNGEN	
Cu THICKNESS KUPFER-SCHICHTDICKE	25-50 µm
Sn THICKNESS ZINN-SCHICHTDICKE	4-15 µm
DRILLED HOLE Ø1.5±0.025 BOHRLOCH-Ø1.5±0.025	FINISHED HOLE Ø1.29 <sup>+0.15</sup> PLATIERTER LOCH-Ø1.29 <sup>+0.15</sup>

- 3 DIMENSION OF LOOSE PIESE  
 MASS FUER EINZELTEIL
- 4 TO BE REELED ON PACAKE REEL WITH INTERLEAVING PAPER  
 PAPPSPULEN MIT ZWISCHENLAGENPAPIER
- 5 TO BE REELED ON HARD FIBER REEL WITH INTERLEAVING PAPER  
 HARTFASERSPULEN MIT ZWISCHENLAGENPAPIER
- 6 0.7 µm - 2 µm Sn OVER 1.2 µm - 2.7 µm Ni (ACTION PIN AREA)  
 0.7 µm - 2 µm Sn UEBER 1.2 µm - 2.7 µm Ni (ACTION PIN BEREICH)

A-A  
 20:1

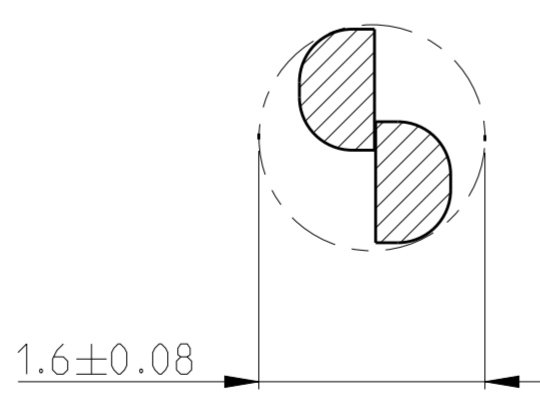

DIRECTION OFF  
 TOP OF REEL

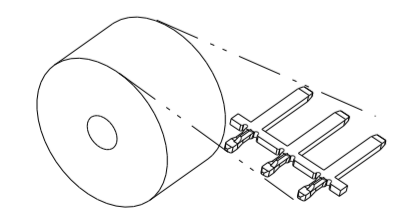

- 1- -2
- 1- -3

- 4
- 5

A3	1-1452692-3	A	Cu Sn 4	1	5
	1-1452692-2	A	Cu Sn 4	1	4
	TYCO PART NO.	REV.	MATERIAL	SURFACE	REEL PACKING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. Nickelfeld 20JUL2004	TE Connectivity	
		CHK J. Ryll 21JUL2004		
DIMENSIONS: mm		APVD	NAME TAB 1.5 x 0.8 WITH ACTION PIN Flachstecker 1.5 x 0.8 mit ACTION PIN	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± 1-PLC ±0.2 2-PLC ±0.1 3-PLC ± 4-PLC ± ANGLES - ±		PRODUCT SPEC 108-18867	SIZE A2	
MATERIAL material_2		APPLICATION SPEC 114-18570	CAGE CODE 00779	
		WEIGHT	DRAWING NO 1452692	
		CUSTOMER DRAWING		RESTRICTED TO A3
		SCALE 10:1		SHEET 1 OF 1