


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.25884, JS	04/19/15	HM
B	STRIPPED ENDS, NOT TINNED, RFS.25889, JS	04/22/15	HM
C	REVISED ALL WIRES TO 80 mm, RFS.25936, JS	06/05/15	HM

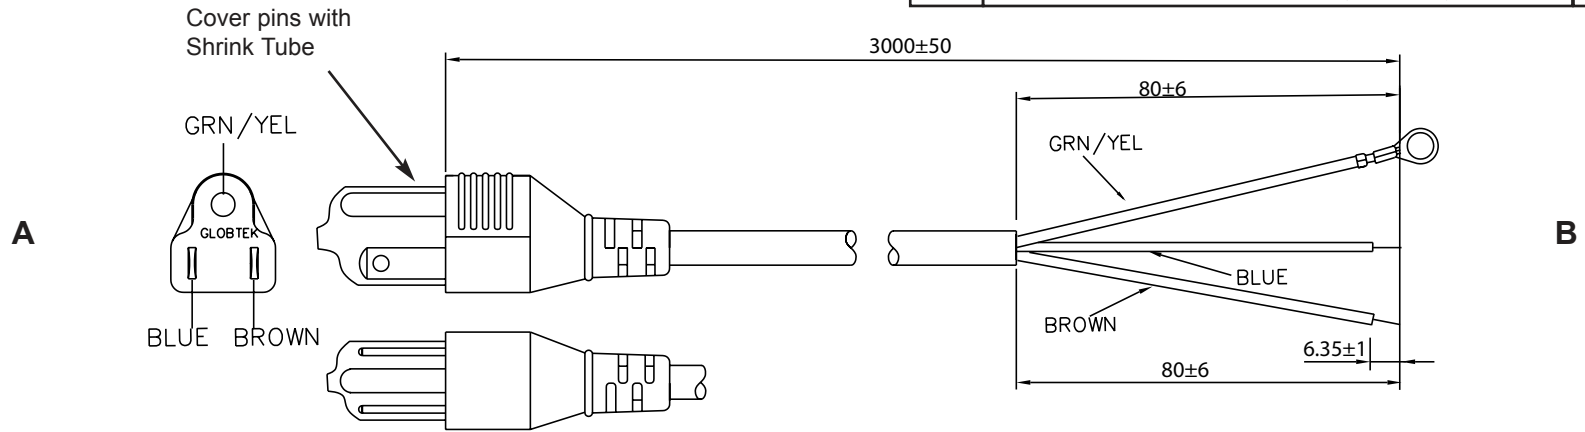

GENERAL SPECIFICATIONS:

RATING: 15A / 125V AC
 CABLE TYPE / SIZE: SJT, # 14 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 105° C
 CONDUCTOR COLORS: BLUE / BROWN / GREEN-YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 3000 ± 50 mm
 CABLE OUTER DIAMETER: 9.3 ± 0.15 mm
 END 'A' PLUG: NEMA 5-15P
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: UL, CSA or cUL
 APPROVALS CABLE: UL, CSA or cUL

**PACKING:
 HANKING**

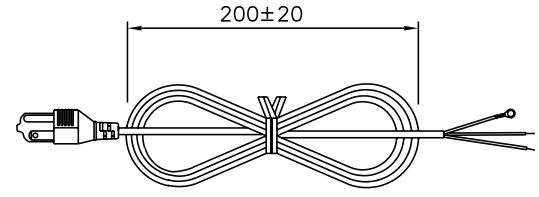

Wire	Color	ROJ ± 6 mm	RIJ ± 1 mm	Terminal
Neutral	Blue	80	6.35	Stripped
Line	Brown	80	6.35	Stripped
Ground	Green-Yellow	80		MOLEX 19193-0078, # 6 RING TERMINAL or Equal

RELEASED
 By N.Frost at 4:13 pm, Jun 05, 2015

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.



2. COVER PINS WITH SHRINK TUBE.

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: JS	DATE: 04/19/15	FSCN No.: G, CC	SIZE: A	DWG TITLE: NORTH AMERICAN NON-DETACHABLE CORDSET
DRAWN: NF	DATE: 04/19/15	SCALE: NONE	PART NO: 3011043M000R-CEE(R)	REV. C
APRVD: HM	DATE: 04/19/15			SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice