| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|---|---|---|---|---|
| 1 | 51-00016.M | Connector, PPL7, 4C, 0° plug, 7x38 mm, chrome, solder, Ø2.2-5.2 mm wire, molding style | 1 | |
| 2 | 24-00206 | Overmold, PPL7 strian relief, 10x24 mm | 1 | TPU |
| 3 | 30-00913 | Wire, 3C BC, 24 AWG, UL20280, 300V, 80C, 4.5 mm braided shield, FT2, TPU | 1 | |
| 4 | Heat shrink | Black | 1 | Covers jacket end |
| 5 | Heat shrink | Black | 1 | Covers drain |

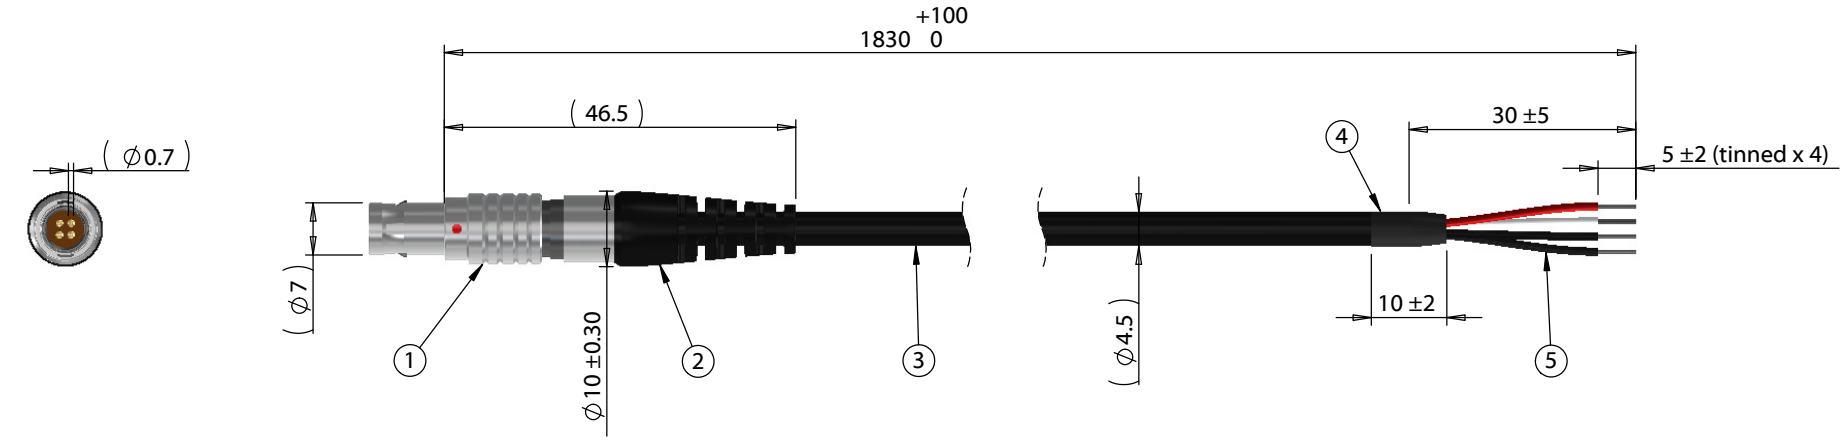





Front View
(Not to Scale)

| Wiring Diagram | |
|---|---|
| 50-00016.M | wire color |
| 1 | Red |
| 2 | White |
| 3 | Black |
| 4 | Drain/Shield |

| Revision: | Date: | Description: |
|---|---|---|
| A | 3/27/2018 | Preliminary |
| | | |
| | | |
| | | |
| | | |

Prepared: AG
Digitally signed by AG
Date: 2018.04.19 13:10:23 -07'00'

Verified: AW
Digitally signed by AW
Date: 2018.04.19 15:40:56 -07'00'

Dimensions are in millimeters.
Tolerances:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

Notes:

RoHS compliant

Function test: no open, no short circuit, no intermittent

Description:

Cable, 1830 mm, 4C PPL7 plug 51-00016.M, to stripped tinned, 24 AWG, UL20280 30-00913


TENSILITY

*tel* 1.541.323.3228 *800* 877.670.7118
*fax* 1.541.323.4202 *web* tensility.com


Size: A

Part number: 10-02260

Scale: 1:1

Sheet 1 of 1


To see a custom version of this cable assembly, call Tensility at 541-323-3228 or email engineering@tensility.com


5 4 3 2 1