

LAPT

# 2SA1295

Silicon PNP Epitaxial Planar Transistor (Complement to type 2SC3264)

Application : Audio and General

## ■ Absolute maximum ratings (Ta=25°C)

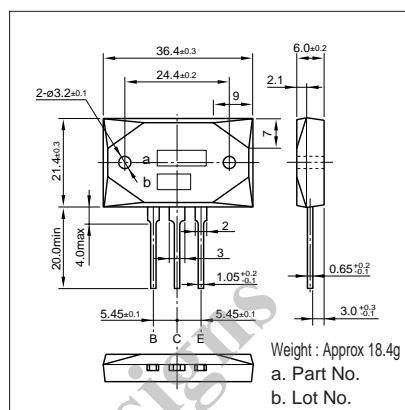
Symbol	Ratings	Unit
V <sub>CBO</sub>	-230	V
V <sub>CEO</sub>	-230	V
V <sub>EBO</sub>	-5	V
I <sub>c</sub>	-17	A
I <sub>B</sub>	-5	A
P <sub>c</sub>	200(T <sub>c</sub> =25°C)	W
T <sub>j</sub>	150	°C
T <sub>tsg</sub>	-55 to +150	°C

## ■ Electrical Characteristics (Ta=25°C)

Symbol	Conditions	Ratings	Unit
I <sub>CBO</sub>	V <sub>CB</sub> =-230V	-100max	μA
I <sub>EBO</sub>	V <sub>EB</sub> =-5V	-100max	μA
V <sub>(BR)CEO</sub>	I <sub>c</sub> =-25mA	-230min	V
h <sub>FE</sub>	V <sub>CE</sub> =-4V, I <sub>c</sub> =-5A	50min*	
V <sub>CE(sat)</sub>	I <sub>c</sub> =-5A, I <sub>B</sub> =-0.5A	-2.0max	V
f <sub>T</sub>	V <sub>CE</sub> =-12V, I <sub>E</sub> =2A	35typ	MHz
C <sub>OB</sub>	V <sub>CB</sub> =-10V, f=1MHz	500typ	pF

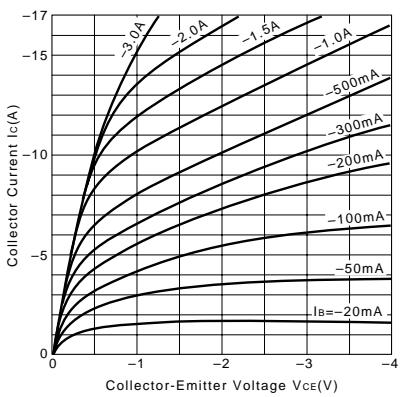
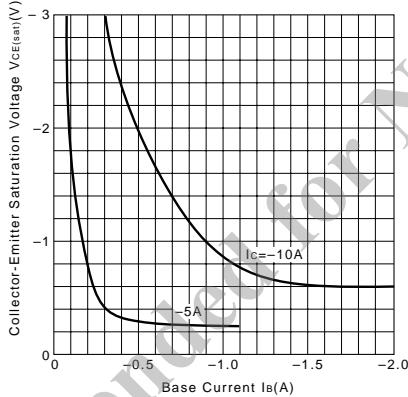
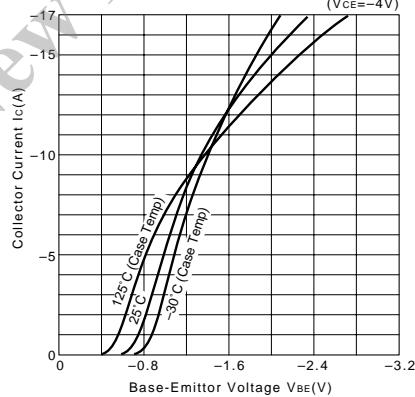
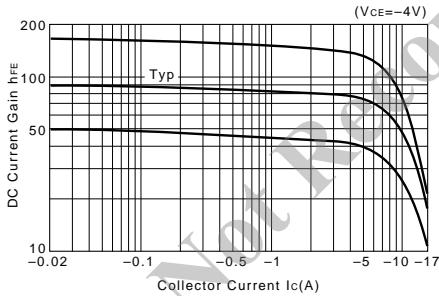
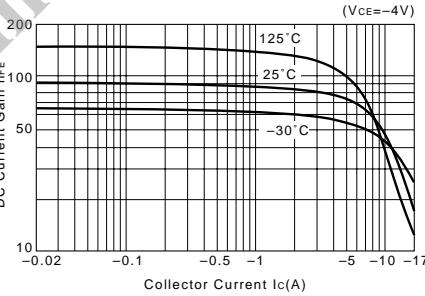
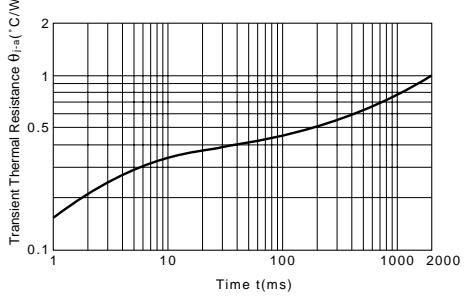
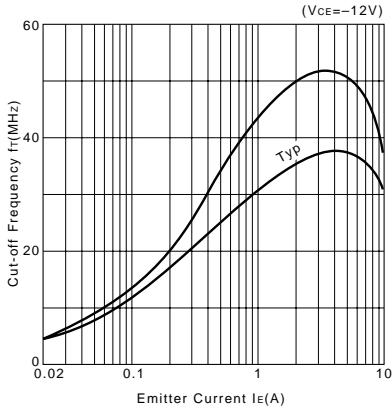
\*h<sub>FE</sub> Rank O(50 to 100), Y(70 to 140)

## External Dimensions MT-200

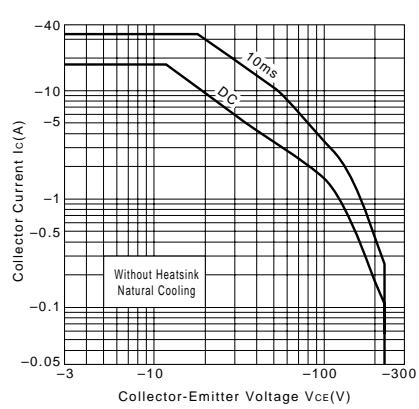


## ■ Typical Switching Characteristics (Common Emitter)

V <sub>CC</sub> (V)	R <sub>L</sub> (Ω)	I <sub>c</sub> (A)	V <sub>BB1</sub> (V)	V <sub>BB2</sub> (V)	I <sub>B1</sub> (mA)	I <sub>B2</sub> (mA)	t <sub>on</sub> (μs)	t <sub>tsg</sub> (μs)	t <sub>f</sub> (μs)
-60	12	-5	-10	5	-500	500	0.35typ	1.50typ	0.30typ

I<sub>c</sub>-V<sub>CE</sub> Characteristics (Typical)V<sub>CE(sat)</sub>-I<sub>B</sub> Characteristics (Typical)I<sub>c</sub>-V<sub>BE</sub> Temperature Characteristics (Typical)h<sub>FE</sub>-I<sub>c</sub> Characteristics (Typical)h<sub>FE</sub>-I<sub>c</sub> Temperature Characteristics (Typical)θ<sub>j-a</sub>-t Characteristicsf<sub>T</sub>-I<sub>E</sub> Characteristics (Typical)

## Safe Operating Area (Single Pulse)



## Pc-Ta Derating

