
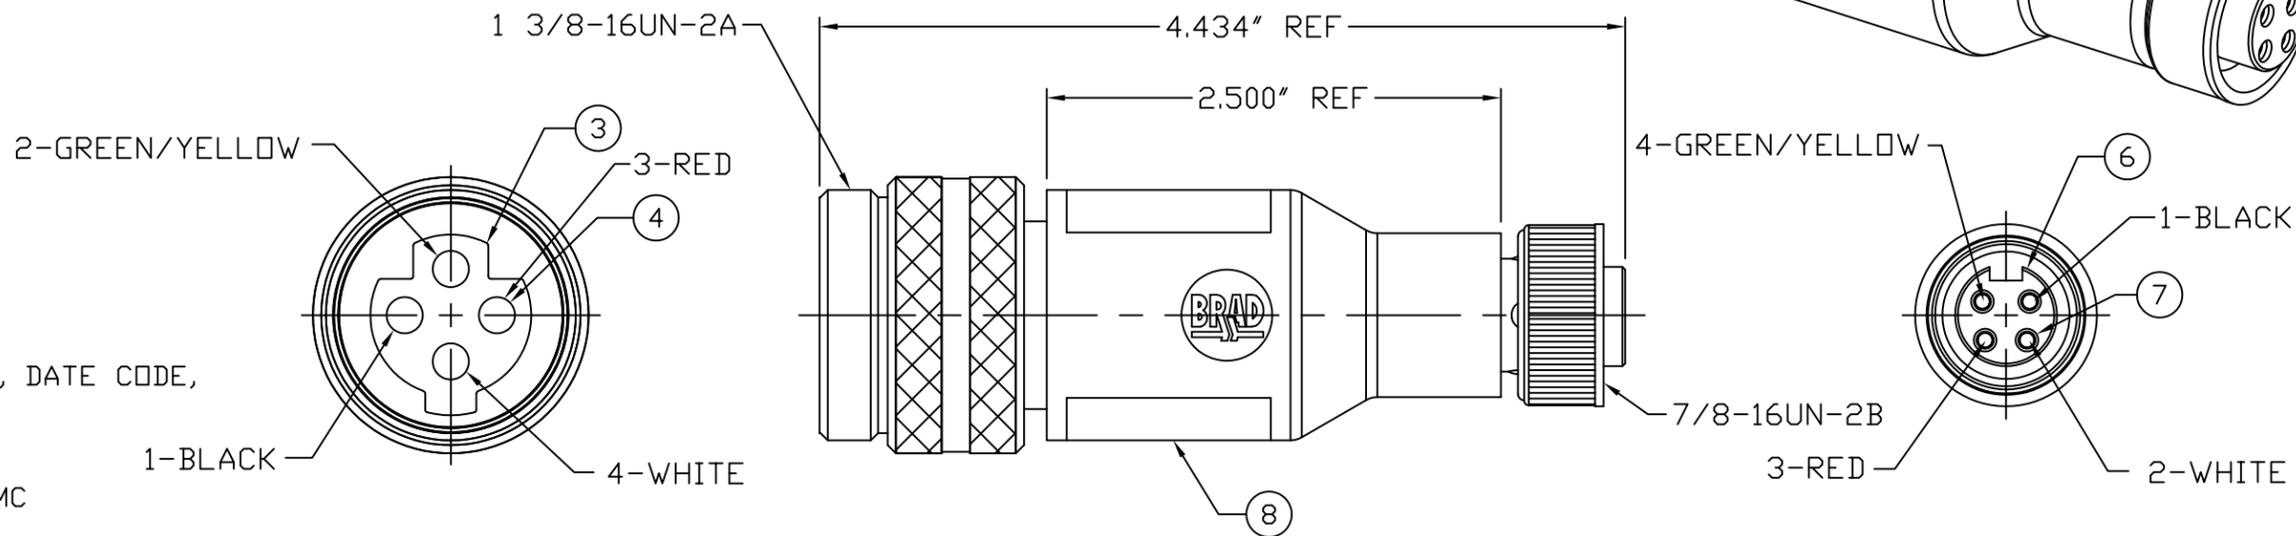




PART NUMBER	ENGINEERING NUMBER
1300680022	1C4130-001

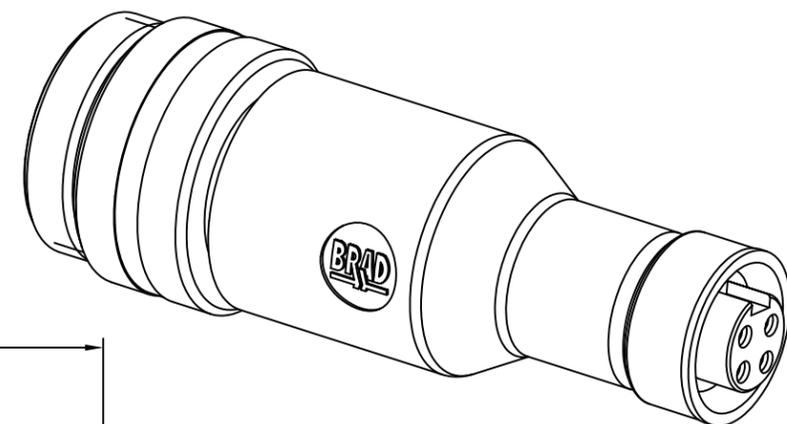

NOTE:

- 1) LABEL IS MARKED WITH P/N, DATE CODE, VOLTAGE & AMPERAGE
- 2) ELECTRICAL DATA:  
REDUCING ADAPTER QC TO MC  
POLES: 4  
MAX. VOLTAGE: 600V AC/DC  
MAX.CURRENT: 15A  
PROTECTION: IP67  
TEMPERATURE RANGE: -20°C TO 90°C
- 3) PACKAGING:  
ASSEMBLIES ARE BAGGED SEPERATELY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO THE OUTSIDE OF THE BAG.
- 4) ASSEMBLY IS RoHS COMPLIANT
- 5) CERTIFICATION:  
UL LISTED/CSA CERTIFIED , FILE E258922

QC MALE      MC FEMALE

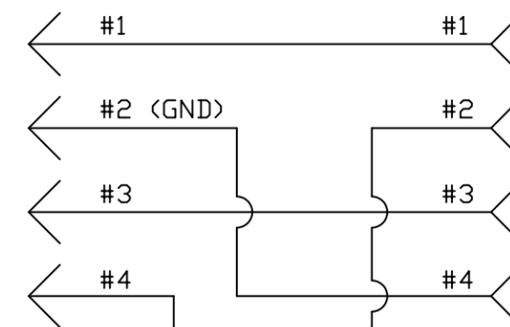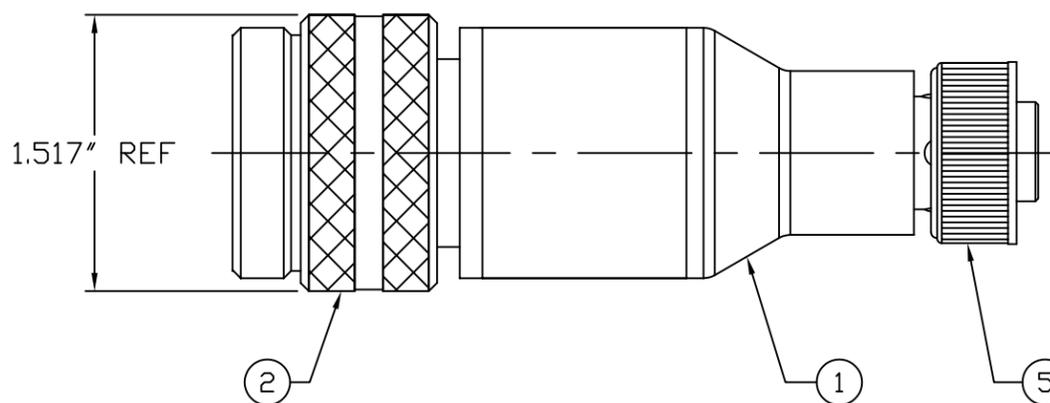

WIRE DIAGRAM

ITEM	QTY	DESCRIPTION	MATERIAL	FINISH
8	1	LABEL	PLASTIC FILM	BLACK/YELLOW
7	4	MC SOCKET CONTACT	COPPER ALLOY	GOLD PLATED
6	1	MC INSERT	PVC	BLACK
5	1	MC COUPLING NUT	ZINC ALLOY	BLACK E-COAT
4	4	QC PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	QC INSERT	PVC	BLACK
2	1	QC COUPLING NUT	ALUMINUM	BLACK ANODIZE
1	1	OVERMOLD	PVC	GRAY

RELEASED EC NO: WNA2010-0424 DRWN: KJOZWIK 2010/01/12 CHKD: BWOODMAN APPR: JFMURPHY 2010/01/15	DESCRIPTION REV	<b>QUALITY SYMBOLS</b> ▽=0 ▽=0	<b>GENERAL TOLERANCES (UNLESS SPECIFIED)</b>		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
			mm	INCH	DRAWN BY KJOZWIK	DATE 2010/01/12	<b>BRAD POWER PASS-THRU 4 POLE QC DC MALE/MC FEMALE</b> <b>MOLEX INCORPORATED</b>			
		4 PLACES ±--- ±--- 3 PLACES ±--- ±.005 2 PLACES ±0.13 ±.010 1 PLACE ±0.25 ±.020	ANGULAR ±1/2°		CHECKED BY BWOODMAN	DATE 2010/01/11				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE TABLE		APPROVED BY JFMURPHY	DATE 2010/01/15	MATERIAL NO.	DOCUMENT NO. SD-130068-004

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION