


- RoHS Compliant (RoHS6).
- Termination finished: Sn-0.7Cu.
- IEC 60950 Compliant (Basic insulation)
- Storage temperature range : -40°C to +125°C.
- Operate temperature range: -40°C to +125°C (including self-temperature rise)


Electrical Specifications @25°C											
Part Number	Turns Ratio @20KHz,0.1V	OCL( $\mu\text{H}\pm 5\%$ ) @10KHz,0.1V	Lk@( $\mu\text{H Max}$ ) @100KHz,0.1V	DCR (m $\Omega$ Max)						HI-POT (0.5mA,1s)	
	N1:N2:N3:N4:N5:N6	1-3	1-3 short other pins	1-3	4-6	7-8	8-9	10-11	11-12	PRI to SEC	7 to 12
TTER09-1204SG	17:5:11:3:11:3	20	2	96	188	267	74	319	87	5000VAC	1500VAC

## MECHANICAL DIMENSIONS (Unit:mm)

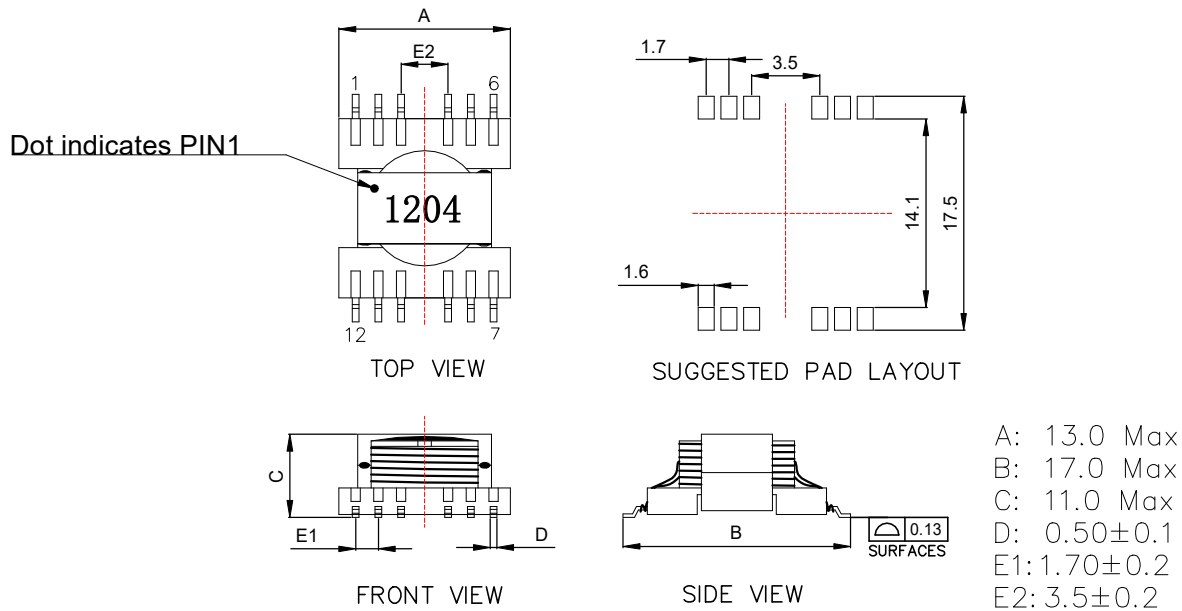

Unless otherwise specified all tolerances are:Typical

## SCHEMATICS

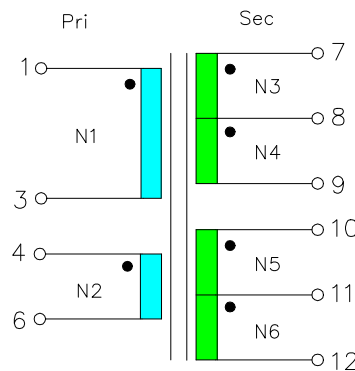

● START POINT

PAN SIZE: 270PCS/REEL  
 UNIT WEIGHT: 3.1g