



ETA-USA

The Power Professionals

WRD-FWX-F-W

120W AC/DC



Features

- Dual Output
- WRD20FWX-F-W: 12V, 24V
- WRD24FWX-F-W: 5V, 12V
- WRD21FWX-F-W: 5V, 24v
- Short circuit protection-Auto recovery
- Over temperature protection-Auto shutdown
- Over load protection-Auto recovery
- **2 year warranty**



RoHS 

PENDING

MODEL/CHANNEL		Unit	WRD20FWX-F-W		WRD21FWX-F-W		WRD24FWX-F-W	
OUTPUT	Nominal Voltage	V	+12V	+24V	+5V	+24V	+5V	+12V
	Current	A	0.15~6	0.15~3.5	0~10	0.15~3.5	0~10	0.15~6
	Ripple	mV	80	120	80	120	50	120
	Line Regulations	mV	±5% nominal output					
	Load Regulations	mV	±5% nominal output					
	Efficiency	%	80 Full load					
	Maximum Power	V	120					
	Hold-up Time typ.	ms	>16 typ [AC IN 100V, lo=100%]					
INPUT	Voltage, Frequency	V	AC90~264V; 47~63Hz					
	Current Typ.	A	2.5A at 110VAC; 1.25A at 230VAC (lo=100%)					
	Inrush Current Typ.	A	<40A typ.(AC IN 110V, lo=100%), <80A typ (AC IN 220V, lo=100%) at cold start					
	Power Factor	-	>0.9 at 115VAC full load; >0.95 at 230VAC full load					
Function	Over Temp. Protection	V	Auto shutdown					
	Over Current Protection	A	Works at 110% to 160% over rated current and recovers automatically					
	Short Circuit Protection	-	Auto recovery once condition is removed					
Electrical Isolation	Input - Output	-	Auto recovery once condition is removed					
	Operating temp. & Humidity	-	5 to 95%					
	Storage temp. & Humidity	-	0 to +60°C(2.5% derating from 41 to 60°C)/-40 to +85°C					
	MTBF	-	>100,000 full load and 25°C ambient					
Dimension	Size(LxWxH) / Weight	mm/g	127L x 80.5W x 40H(180)/500					
	Safety	-	CB, CE, UL, C-UL					
	Certification	-	FCC Class B Part 15, CISPR22 Class B, EN55032 Class B, CE					




ETA-USA

16170 Vineyard Blvd. Suite 180 Morgan Hill, CA 95037 <http://www.eta-usa.com>

Toll-free (US only): 800-ETA-POWR (800-382-7697) Telephone: 408 778-2793 FAX: 408-779-2753



Dimension Diagram (mm)

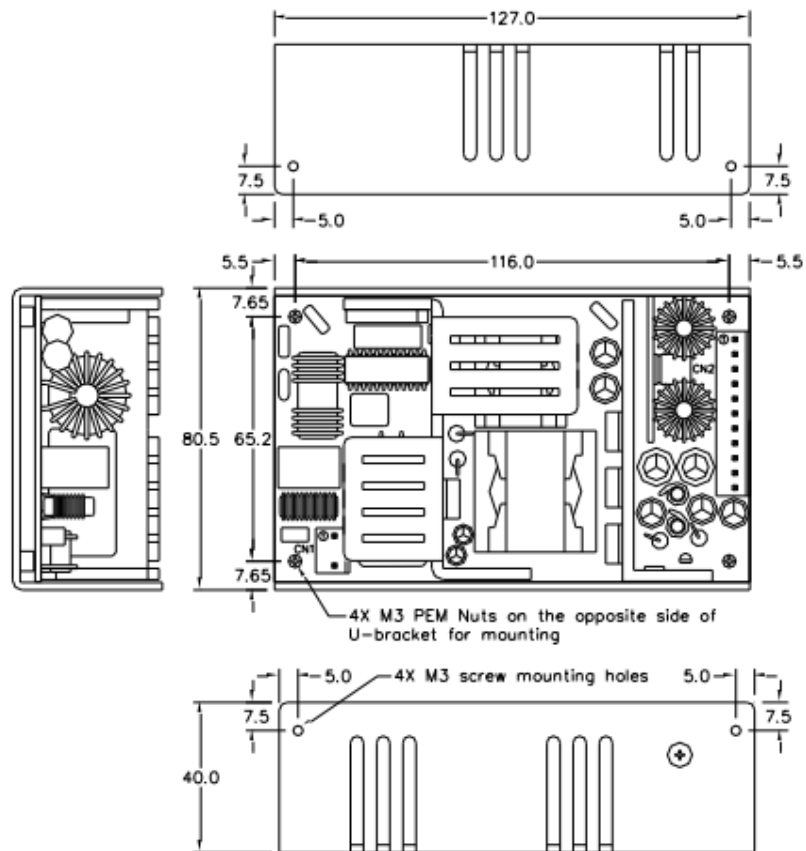

Mark	Pin Connection
L	AC input line
N	AC input neutral
FG	AC Chassis Ground





Output Pins

	1	2	3	4	5	6	7	8	9	10	11
WRD20FWFWX-F-W	-	-	-	-	-	-	GND	GND	+12V	+12V	+24V
WRD21FWFWX-F-W	-	+24V	GND	GND	+5V	+5V	-	-	-	-	-
WRD24FWFWX-F-W					+5V	+5V	GND	GND	+12V	+12V	-

