

<b>エ</b>	വ	<b>п</b>	<u>п</u>	0



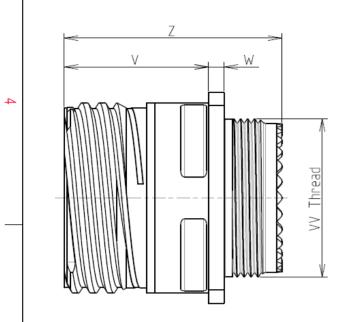

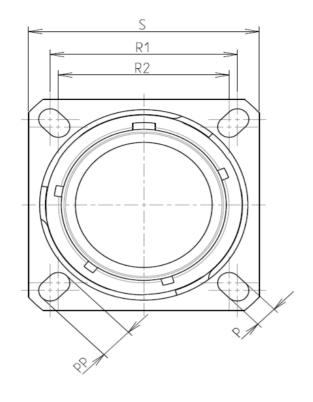

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

ł	-Shell Material	: Aluminium			
	-Shell Plating	: Black Zinc Nickel			
	-Insulator	: Thermoplastic			
	-Contacts	: Copper Alloy			
	-Seals & Grommet	: Silicon Elastomer			
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
	-Durability	: 500 Mating cycles			
	-Delivered without Souriau contacts				
	-Temperature Range	-65℃ to +175℃			
	-Salt Spray	: 500 hours			

: 11.02 g ± 10%

8D 0

G

11

Ζ

02

Ρ


F

D

L

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		

Е

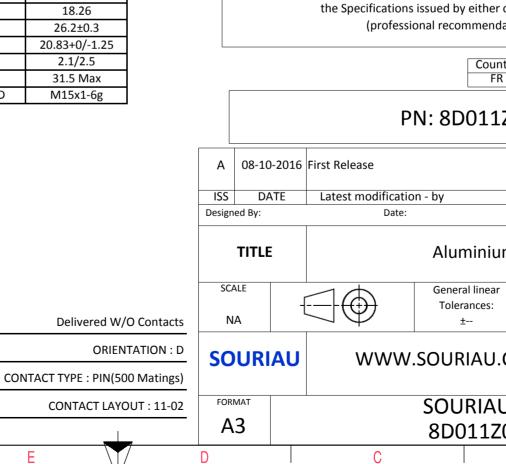

D

0		Φ		Þ		
					4	
LAY	OUT SHOWN AS EXA	MPLE			3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D011Z02PDL						
st Release Latest modificatio	n - by			MOD N°		
Date: CUSTOMER DRAWING Aluminium Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJE 859		1	
WWW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission						
SOURIAU DRG N°         SHEET           8D011Z02PDL-C         1/2						
С		В		А	-	

ſ	<u>т</u>	D	L L	m	D	0
		Contact Layout				Panel Cuto
4	.x .0 (2.	+Y +Y +Y +Y +X +X +X (2.4imm)			2	SQUARE FLANGE RECEPTACLE (TYPE 0)
	Con posi IC A B Shell size 11 -2	X-axis         Y-axis           (mm)         (mm)           0        095 (2.41)           +.000 (.00)        095 (2.41)	act ion		<u>.</u>	Dim
ω						ØA ØAA R1 ØT
						SOURIAU shall not be liable for ar due to a use of the Products w the Specifications issued by either o (professional recommenda
0						PN: 8D0112
					ISS DATE Designed By:	16 First Release Latest modification - by Date:
<b>_</b>					SCALE NA	Aluminiur General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU. SOURIAU 8D011Z0
l	Н	G	F	E	D	C

