


6	5	4	3	2	1
ITEM	PART#	DESCRIPTION	QTY	UOM	
A	561349001	2.0 WTB CONN CRIMP REC AWG#22-#24 CHAIN	1	PC	

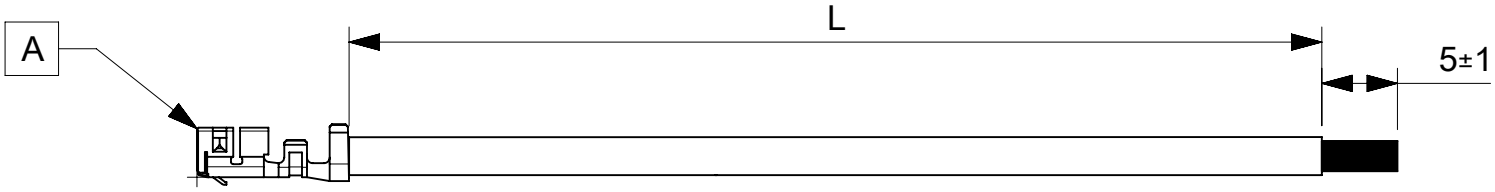

PART NUMBER	TITLE	CABLE DESCRIPTION	LENGTH 'L'	CABLE COLOR
2196551121	Micro-One ISL F-S 75mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	75±3	BLACK
2196551122	Micro-One ISL F-S 150mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	150±4	BLACK
2196551123	Micro-One ISL F-S 225mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	225±4	BLACK
2196551124	Micro-One ISL F-S 300mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	300±4	BLACK
2196551125	Micro-One ISL F-S 450mm 22AWG Lead BK Sn	1X22AWG DISC PVC BK UL1569 HOOKUP	450±4	BLACK
2196551111	Micro-One ISL F-S 75mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	75±3	BLACK
2196551112	Micro-One ISL F-S 150mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	150±4	BLACK
2196551113	Micro-One ISL F-S 225mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	225±4	BLACK
2196551114	Micro-One ISL F-S 300mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	300±4	BLACK
2196551115	Micro-One ISL F-S 450mm 24AWG Lead BK Sn	1X24AWG DISC PVC BK UL1569 HOOK UP	450±4	BLACK
2196552121	Micro-One ISL F-S 75mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	75±3	RED
2196552122	Micro-One ISL F-S 150mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	150±4	RED
2196552123	Micro-One ISL F-S 225mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	225±4	RED
2196552124	Micro-One ISL F-S 300mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	300±4	RED
2196552125	Micro-One ISL F-S 450mm 22AWG Lead RD Sn	1X22AWG DISC PVC RD UL1569 HOOKUP	450±4	RED
2196552111	Micro-One ISL F-S 75mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	75±3	RED
2196552112	Micro-One ISL F-S 150mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	150±4	RED
2196552113	Micro-One ISL F-S 225mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	225±4	RED
2196552114	Micro-One ISL F-S 300mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	300±4	RED
2196552115	Micro-One ISL F-S 450mm 24AWG Lead RD Sn	1X24AWG DISC PVC RD UL1569 HOOK UP	450±4	RED

NOTES:

1. Crimping to be done as per Molex standards.
2. The product specification relies on the terminals & wire spec.
3. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.9mm Max for 22 AWG and 0.75mm Max for 24 AWG.

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG
DOCUMENT STATUS	P1	RELEASE DATE	2022/01/11 06:51:05

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		<p>SEE TABLE</p> <p>PRODUCT CUSTOMER DRAWING</p>						
	DIMENSION UNITS mm	SCALE NTS	EC NO: 690622 DRWN: SAIKIG 2021/12/25 CHK'D: MNARAYAN01 2022/01/11 APPR: MNARAYAN01 2022/01/11								
	GENERAL TOLERANCES (UNLESS SPECIFIED)		INITIAL REVISION: DRWN: SAIKIG 2021/12/25 APPR: MNARAYAN01 2022/01/11								
	ANGULAR TOL ± °		DOCUMENT NUMBER 2196551121								
DIVISIONAL SYMBOLS	4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING A4-SIZE	SERIES 219655	MATERIAL NUMBER SEE TABLE	CUSTOMER GENERAL MARKET	DOC TYPE PSD	DOC PART 000	REVISION A	SHEET NUMBER 1 OF 1