


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
H	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		ECR-15-010046	13JUL15	SW	RZ

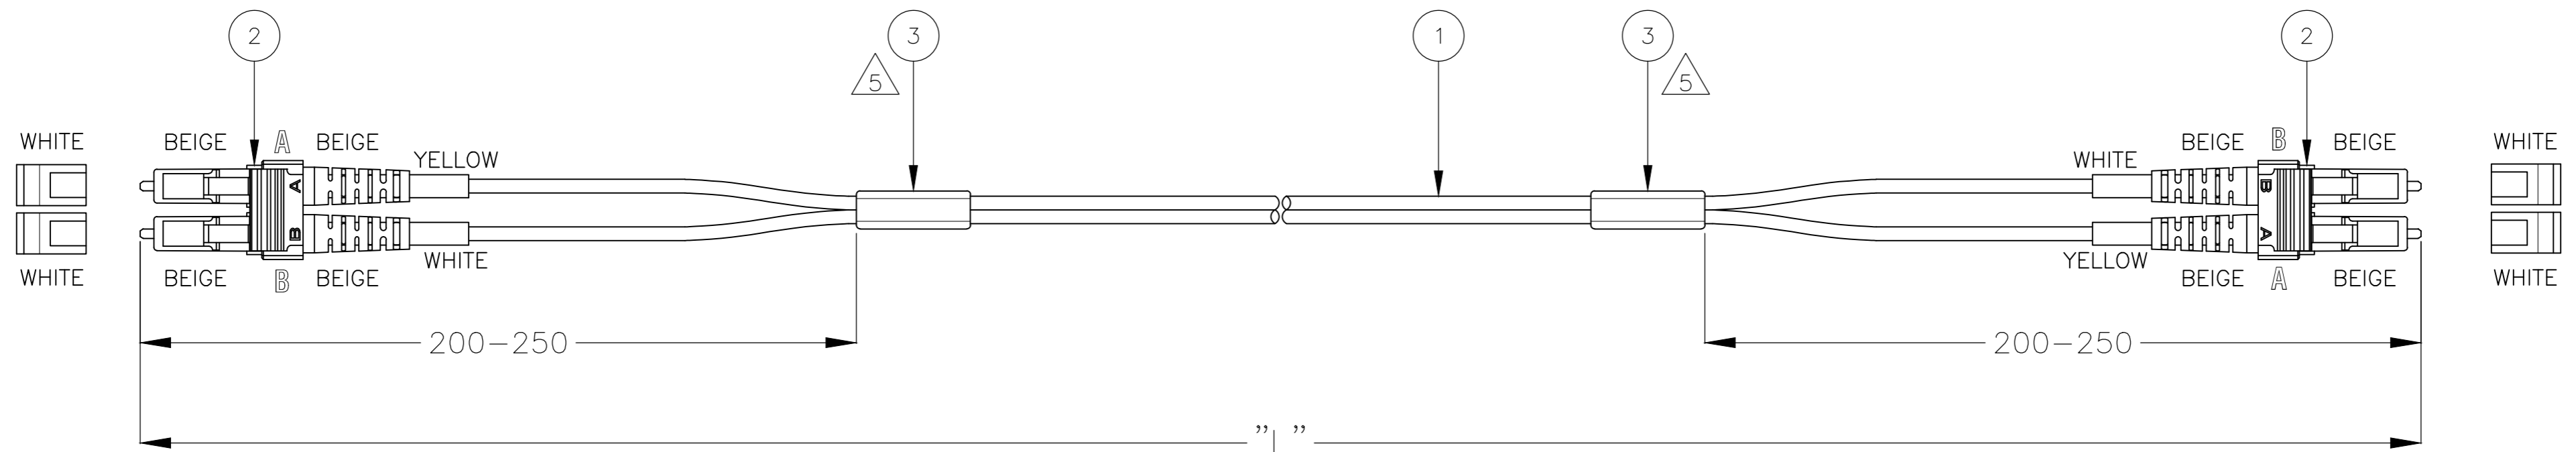

ASSEMBLY CONNECTIVITY	
LC CONN.	LC CONN.
YELLOW (A) ←	→ WHITE (B)
WHITE (B) ←	→ YELLOW (A)

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1206850	
PART NUMBER	"L" (meter)
X-2061529-Y	XY.0

NOTES:

- ATTENUATION ≤ 0.3 dB, MEASURED AT 850 nm ACCORDING TO I.E.C. 61300-3-4 INSERTION METHOD B
 - RETURN LOSS ≥ 20 dB, IN MATED CONDITION AGAINST REFERENCE CONNECTOR AT 850 nm
 - FILLED OUT TEST RESULT SHEET SUPPLIED WITH EACH INDIVIDUALLY PACKED ASSEMBLY
 - CABLE INFORMATION:
 - CORE DIAMETER: 50/125 μ m (2x)
 - OUTER JACKET DIAMETER: 1.8 x 3.6 mm
 - OUTER JACKET COLOUR: ORANGE
 - OUTER JACKET MATERIAL: LSZH
- △ 5 BLANK LABEL
 ONLY ONE LABEL IN THE MIDDLE OF THE CABLE IS USED FOR LENGTHS < 0.6 METER

2	BLANK LABEL	3
2	LC DUPLEX CONNECTOR, ULTRA SHORT, MULTI MODE, BEIGE	2
L	FOCAB 1.8MZ 50/125, ORANGE, LSZH	1
Qty	Description	Item
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1.0 1 PLC ± 0.5 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$
MATERIAL: -		FINISH: -
DWN: R. COOLEN 13APR2011 CHK: R. GROENEVELD 01JUN2011 APVD: A. HENGELMOLEN 01JUN2011 PRODUCT SPEC: - APPLICATION SPEC: -		NAME: - SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=2061529 RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: NTS SHEET: 1 of 1 REV: B