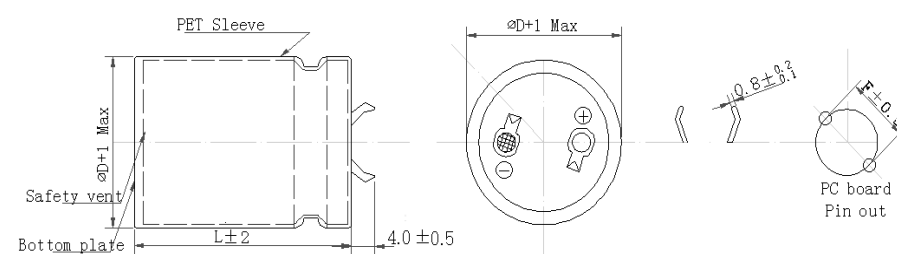


Series code (PT)

Aluminum Electrolytic Capacitor

Customer		Digi-Key		SERIES	PT	NO.:			PUBLISH DATE			2022-03-25								
<div></div>																				
No.	CHINSAN Part No.	Customer Part No.	Capacitance (uF)	Tolerance On rated Capacitance (%)	Working Voltage (Vdc)	Surge Voltage (Vdc)	Category Temp Range (°C)	Tanδ @ 25°C (120Hz) (Max)	Leakage Current (uA) (2 min.)	Rated Ripple Current (mA rms) @ 105°C 120Hz	Rated Ripple Current (mA rms) @105°C 100kHz	ESR @25°C (mΩ max/ 120Hz)	Impedance @20°C (mΩ max/ 100kHz)	Endurance @ 105°C (Hours)	Dimensions (mm)					Appearance Drawing No
															D Φ	L	a	d	F	
1	PT2G561MND3545	/	560 μF	±20%	400 V	/	-25~+105	/	/	1400	/	/	/	4000	35	45	/	/	10	---
※Test leakage current before testing dissipation factor and capacitance during the electric characteristic test.																				
REMARKS:										APPROVED BY			CHECKED BY			PREPARED BY				
Sleeve Color: Black.										张洪斌			曾爱娥			梁慧妍				