





DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC		DIST		REVISIONS				DATE	APPD
P	F	ZONE	LTR	DESCRIPTION					
AF	50			E1	REVISED PER ECR-19-017644			11DEC2019	PC/MK

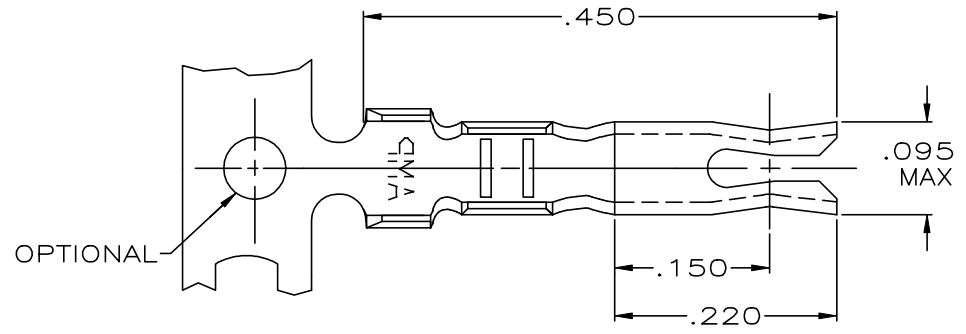

- 1 CONTINUOUS STRIP ON REELS.
- 2 .000030 MIN GOLD PER MIL-G-45204 IN LOCALIZED GOLD PL AREA, GOLD FLASH ON REMAINDER OVER .000050 MIN NICKEL PER QQ-N-290.
- 3 .000080 MIN TIN PL PER MIL-T-10727.

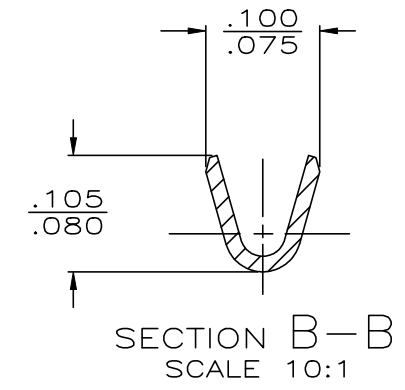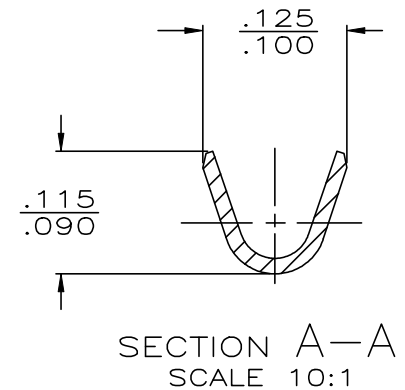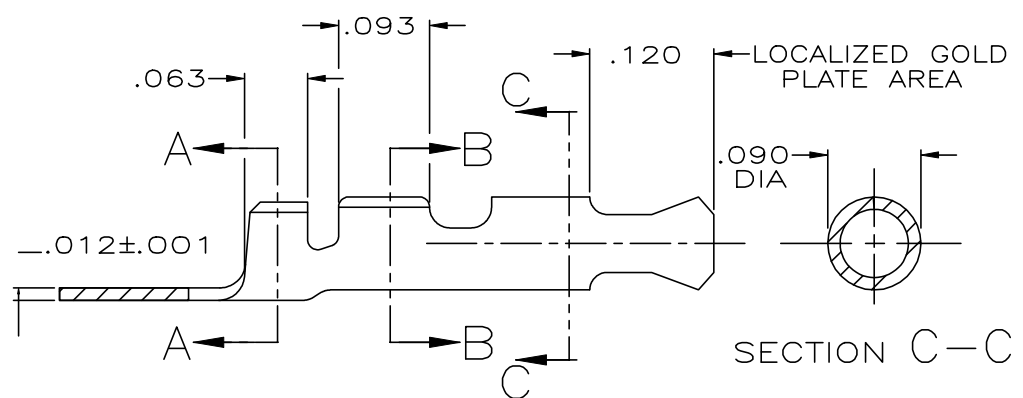

OBSOLETE	3	.048-.071	24-20 AWG	60885-2	
	2	DIA		60885-1	
FINISH		INSULATION RANGE	WIRE RANGE	PART NO	
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± .015 ANGLES ± -		DR 2/4/91 P FORTNEY	TE Connectivity		
		CHK 2/4/91 JR RUTH			
		APPD 2/4/91 G YETTER	NAME RECEPTACLE, PIN, .055 DIA		
		APPD 2/4/91 R WEAVILL			
MATERIAL		PRODUCT SPEC	SIZE	CAGE CODE	DRAWING NO
#4 HARD PHOS BRONZE		-	B	00779	60885
FINISH		APPLICATION SPEC	SCALE	SHEET	
SEE TABLE		-	8:1	1 OF 1	
		WEIGHT			
		-			